




# iPhone 6 Plus Audio Control and Rocker Switch Cable Replacement

Prereq only for rear case.

Written By: Walter Galan

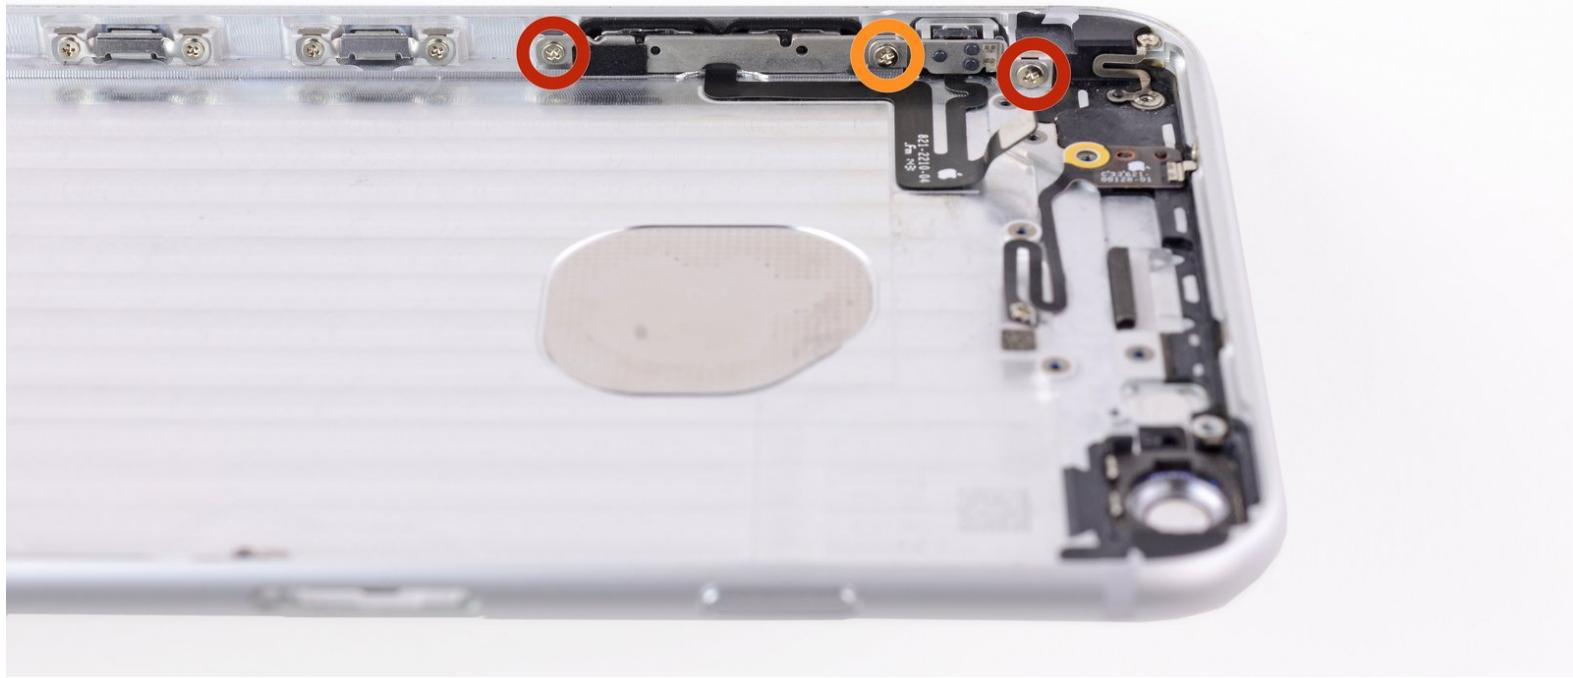

## INTRODUCTION

Prereq only for rear case.

### TOOLS:


- [Phillips #000 Screwdriver](#) (1)
- [Tweezers](#) (1)

## Step 1 — Audio Control and Rocker Switch Cable



- Remove the following screws securing the audio controls and rocker switch to the rear case:
  - Two 2.0 mm Phillips #00 screws
  - One 2.5 mm Phillips #00 screw

## Step 2

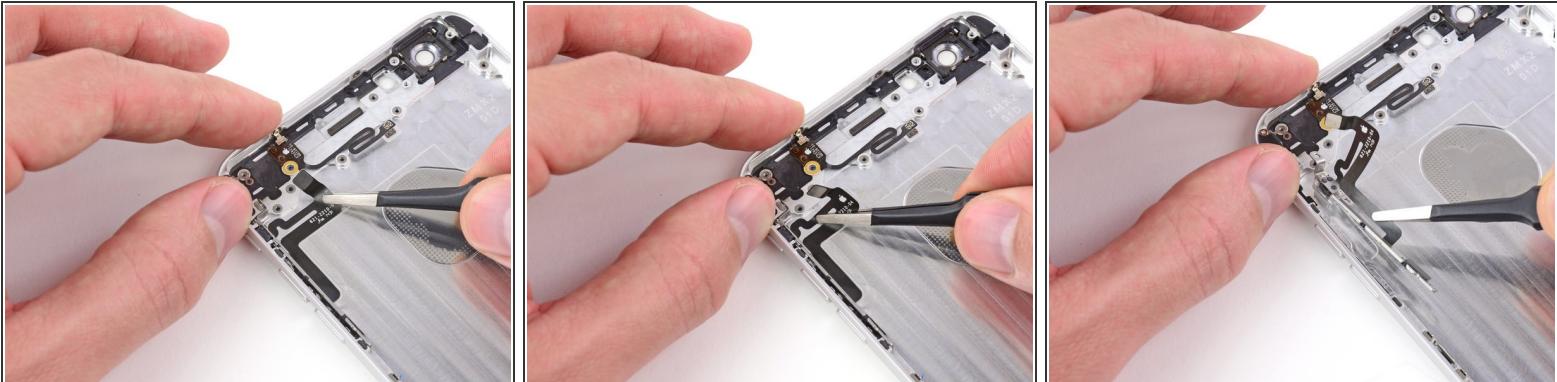

- Grasp the audio control and rocker switch cable with a pair of tweezers.
- Slowly peel the audio control and rocker switch cable up off the rear case.

**⚠** Peel with care. The cable is secured to the rear case with mild adhesive.

To reassemble your device, follow these instructions in reverse order.