



# iPhone 8 Plus Lightning Connector Assembly Replacement

Remove and replace the entire Lightning connector assembly in your iPhone 8 Plus.

Written By: Jeff Suovanen



## INTRODUCTION

Use this guide to replace the Lightning connector assembly in your iPhone 8 Plus, which can resolve many charging and connectivity issues.

### TOOLS:

- [SIM Card Eject Tool \(1\)](#)
- [P2 Pentalobe Screwdriver iPhone \(1\)](#)
- [iOpener \(1\)](#)
- [Suction Handle \(1\)](#)
- [iFixit Opening Picks set of 6 \(1\)](#)
- [Spudger \(1\)](#)
- [Tweezers \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)
- [Tri-point Y000 Screwdriver Bit \(1\)](#)
- [Standoff Screwdriver for iPhones \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Isopropyl Alcohol \(1\)](#)

### PARTS:

- [iPhone 8 Plus Lightning Connector Assembly \(1\)](#)
- [iPhone 8 Plus Lightning Port Bracket \(1\)](#)
- [iPhone 8 Plus Display Assembly Adhesive \(1\)](#)

## Step 1 — Pentalobe Screws



**⚠** Before you begin, discharge your iPhone battery below 25%. A charged lithium-ion battery can catch fire and/or explode if accidentally punctured.

- Power off your iPhone before beginning disassembly.
- Remove the two 3.5 mm pentalobe screws from the bottom edge of the iPhone.

**i** Opening the iPhone's display will compromise its waterproof seals. Have [replacement seals](#) ready before you proceed past this step, or take care to avoid liquid exposure if you reassemble your iPhone without replacing the seals.

## Step 2 — Opening Procedure




- ⓘ Heating the lower edge of the iPhone will help soften the adhesive securing the display, making it easier to open.
- Use a hairdryer or [prepare an iOpener](#) and apply it to the lower edge of the iPhone for about 90 seconds in order to soften up the adhesive underneath.

### Step 3



- Apply a suction cup to the lower half of the front panel, just above the home button.
  - Be sure the suction cup does not overlap with the home button, as this will prevent a seal from forming between the suction cup and front glass.
  - If your display is badly cracked, [covering it with a layer of clear packing tape](#) may allow the suction cup to adhere. Alternatively, very strong tape may be used instead of the suction cup. If all else fails, you can superglue the suction cup to the broken screen.

## Step 4

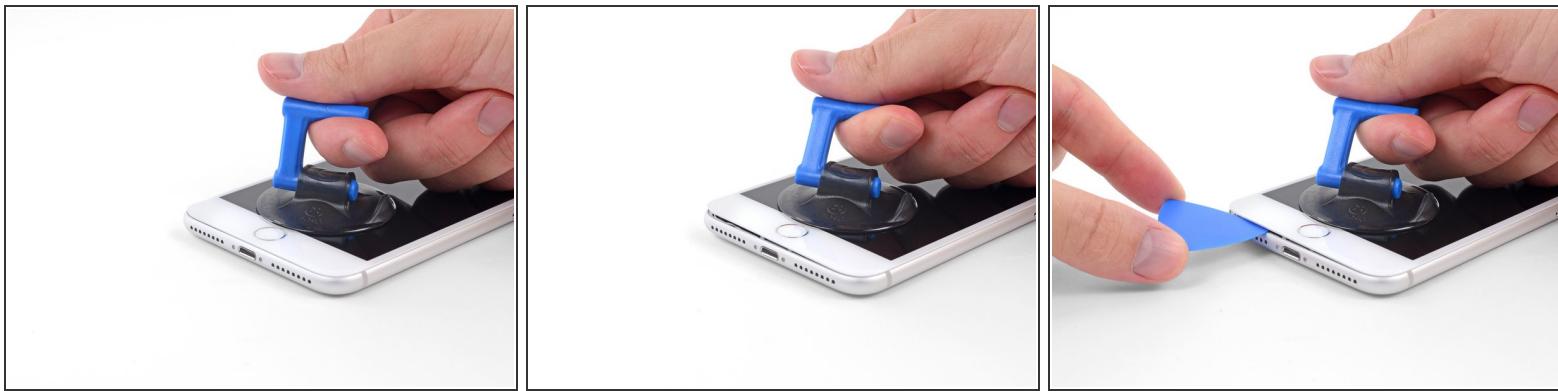

- Pull up on the suction cup with firm, constant pressure to create a slight gap between the front panel and rear case.
- Insert an opening pick or other thin pry tool a few millimeters into the gap.
  - The watertight adhesive holding the display in place is very strong; creating this initial gap takes a significant amount of force. If you're having a hard time opening a gap, apply more heat, and gently rock the screen up and down to weaken the adhesive until you create enough of a gap to insert your tool.

## Step 5



- Slide your pick around the corner and up the left edge of the phone, moving towards the volume control buttons and silent switch, breaking up the adhesive holding the display in place.
- Stop near the top left corner of the display.


## Step 6



- Re-insert your tool at the lower right corner of the iPhone, and slide it around the corner and up the right side of the phone to separate the adhesive.

**⚠** Don't insert the pick very far, or you may damage the display cables along this side of the iPhone. Insert it only a few millimeters, or about the width of the display bezel.

## Step 7

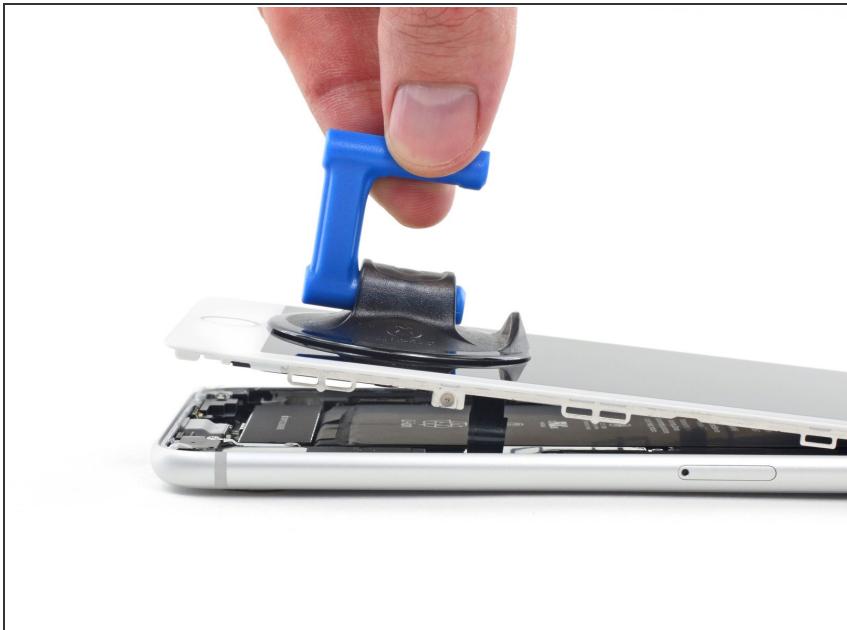

- Gently pull up on the suction cup to lift up the bottom edge of the display.

**⚠** **Do not raise the display more than 15°** or you'll risk straining or tearing the ribbon cables connecting the display.

## Step 8



- Pull on the small nub on the suction cup to remove it from the front panel.

## Step 9



- Slide an opening pick underneath the display along the top edge of the phone to loosen the last of the adhesive.

## Step 10





- Slide the display assembly slightly down (away from the top edge of the phone) to disengage the clips holding it to the rear case.

## Step 11



- Open the iPhone by swinging the display up from the left side, like the back cover of a book.
- ⚠** Don't try to fully separate the display yet, as several fragile ribbon cables still connect it to the iPhone's logic board.
- Lean the display against something to keep it propped up while you're working on the phone.


## Step 12 — Battery Disconnection

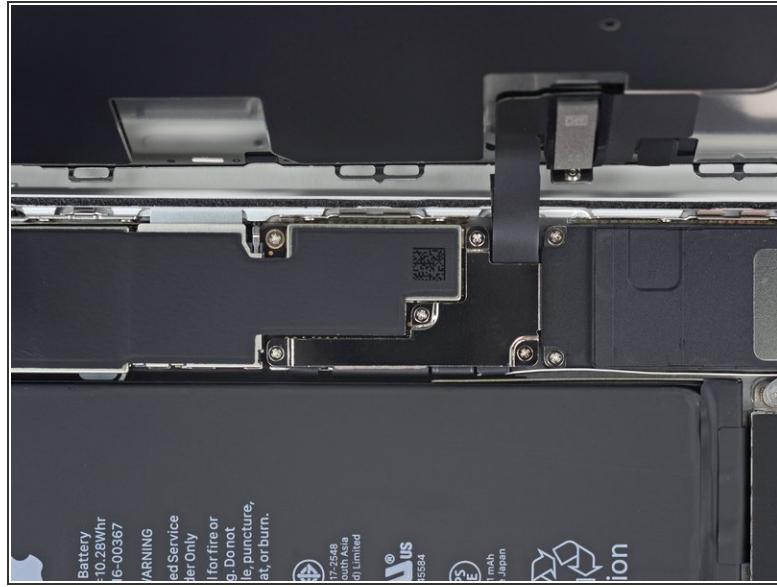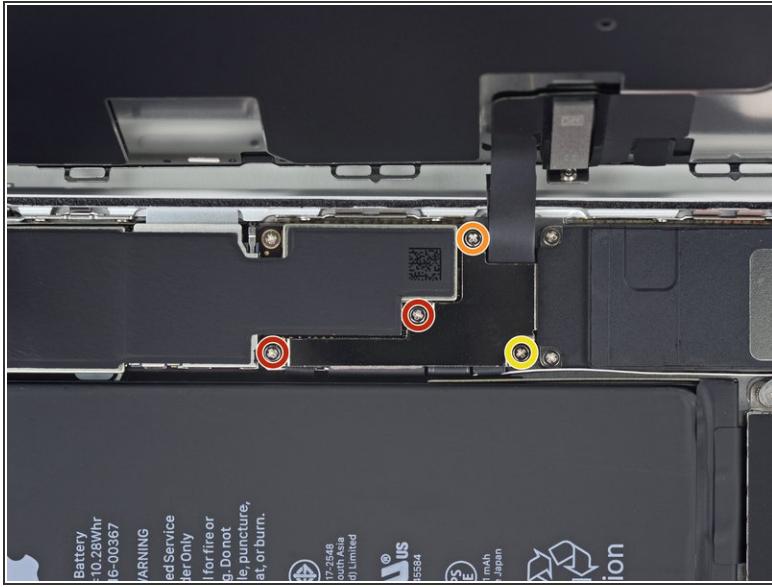

- Remove four Phillips (JIS) screws securing the lower display cable bracket to the logic board, of the following lengths:
  - Two 1.3 mm screws
  - One 1.4 mm screw
  - One 2.7 mm screw


► Throughout this guide, [keep careful track of your screws](#) so that each one goes back where it came from during reassembly. Installing a screw in the wrong place can cause permanent damage.

## Step 13

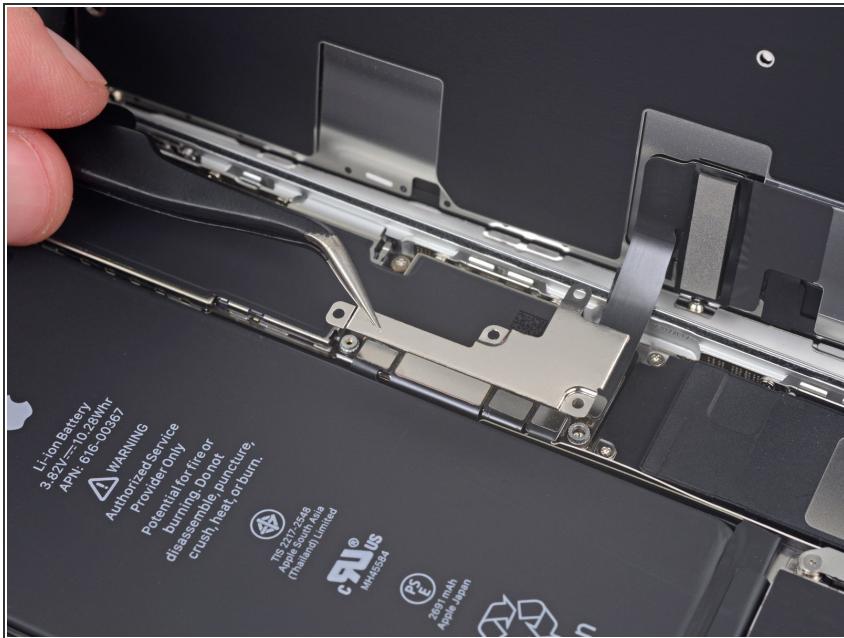


- Remove the lower display cable bracket.

## Step 14

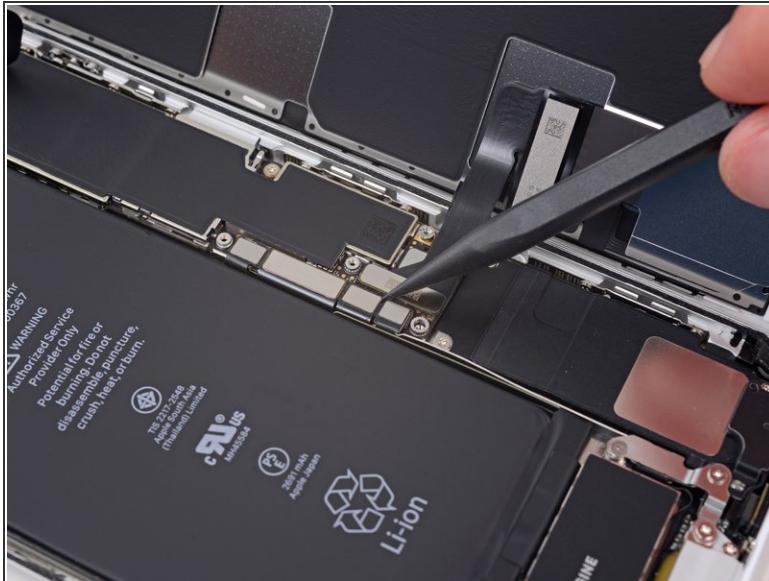


- Use the point of a spudger to pry the battery connector up from its socket on the logic board.
- Bend the connector cable up slightly to prevent it from accidentally making contact with the socket and providing power to the phone during your repair.

## Step 15 — Display Assembly

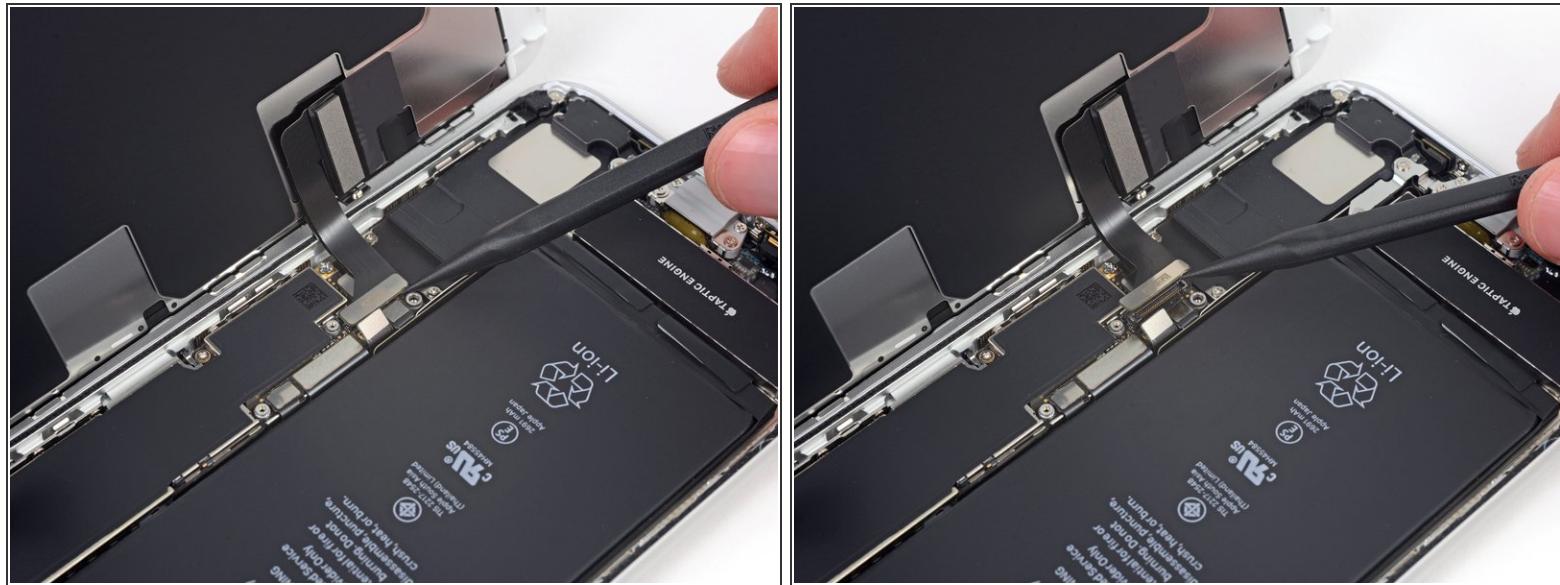


- Use the tip of a spudger or a fingernail to disconnect the large lower display connector by prying it straight up from its socket.
- ☒ To re-attach press connectors like this one, press down on one side until it clicks into place, then repeat on the other side. Do not press down on the middle. If the connector is even slightly misaligned, the connector can bend, causing permanent damage.

## Step 16

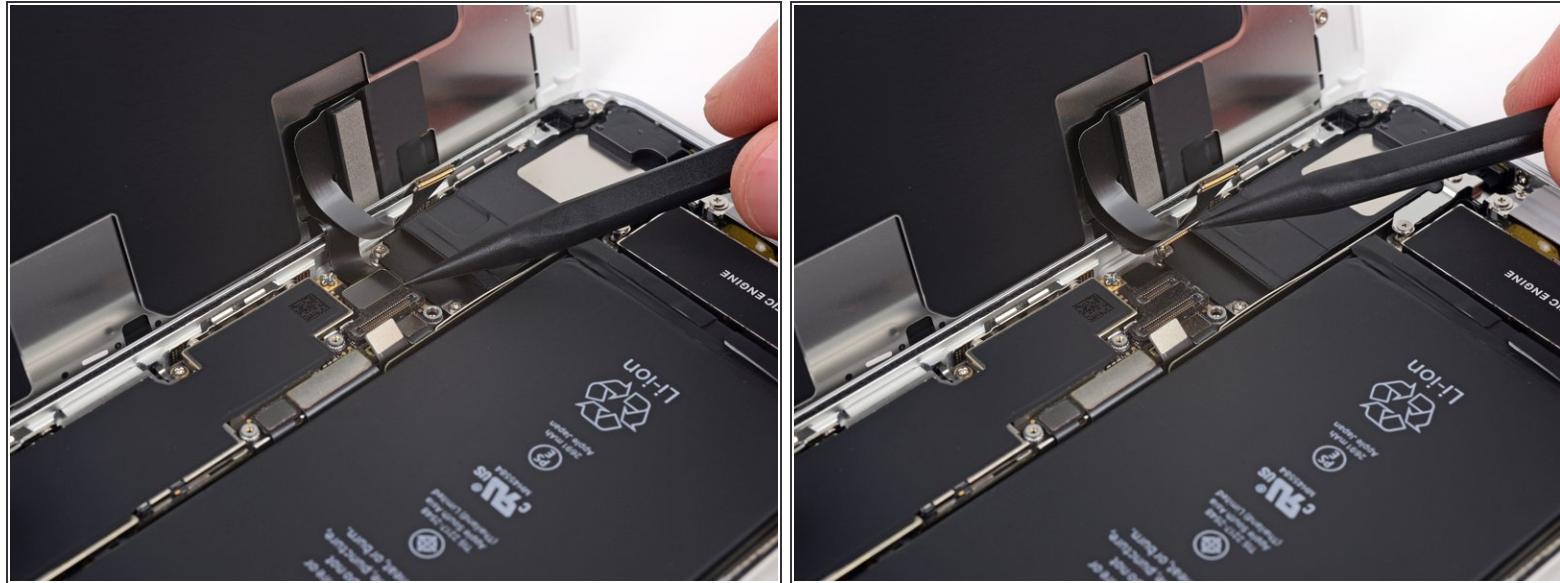

- Disconnect the second lower display cable connector, directly behind the one you disconnected in the previous step.

## Step 17

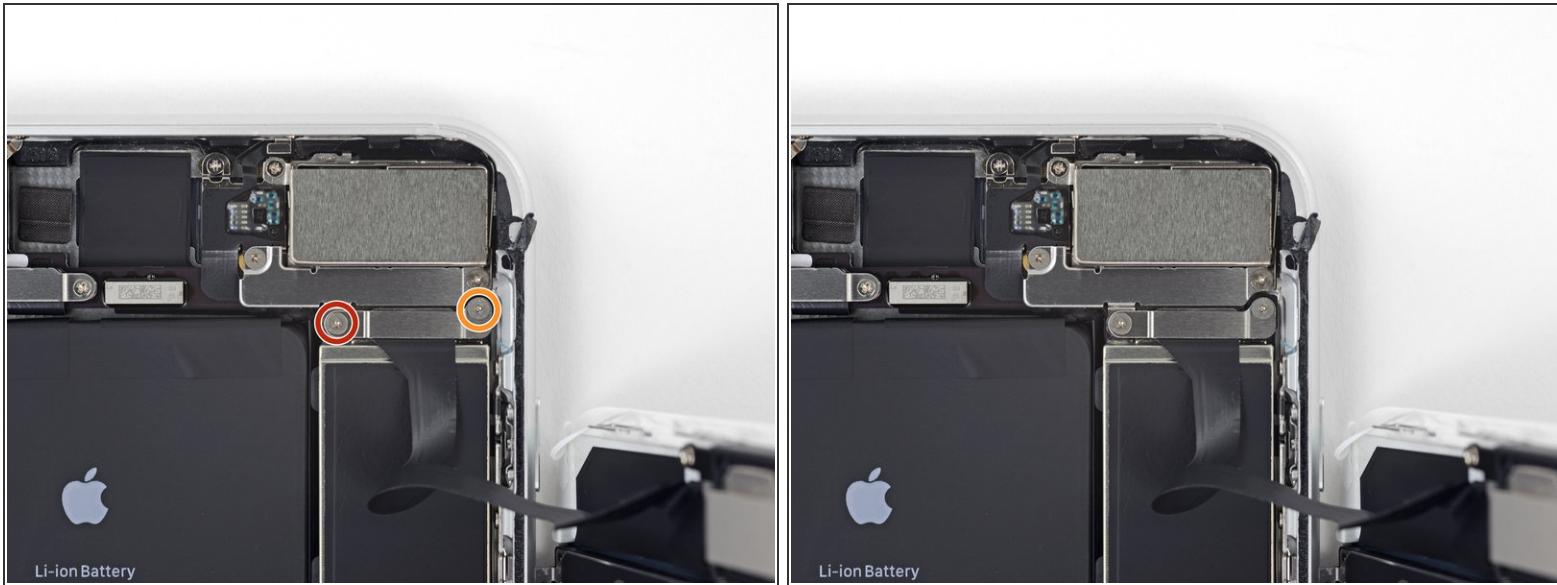

- Remove the two tri-point Y000 screws securing the bracket over the front panel sensor assembly connector:
  - One 1.0 mm screw
  - One 1.2 mm screw

## Step 18



- Remove the bracket covering the front panel sensor assembly connector.

## Step 19



- Use the tip of a spudger or a fingernail to disconnect the front panel sensor assembly connector from its socket.


## Step 20



- Remove the display assembly.

☞ During reassembly, pause here if you wish to [replace the adhesive around the edges of the display](#).

## Step 21 — Rear-Facing Cameras

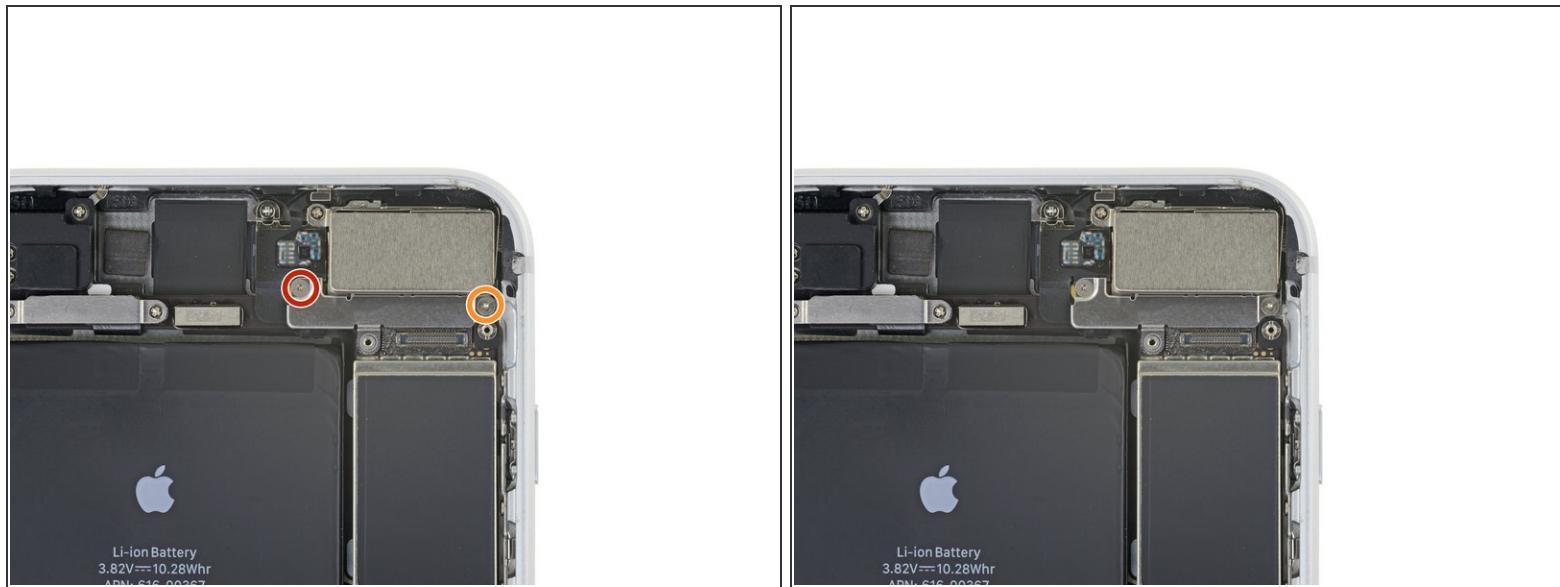

- Remove the two Y000 screws securing the rear camera connector cover bracket:
  - One 1.4 mm screw
  - One 1.4 mm (nonferrous) screw


 This screw tends to not be attracted to a magnetized screwdriver. Make sure to reinstall it in the correct place—a magnetized screw may interfere with the compass.

## Step 22



- Remove the bracket.

## Step 23

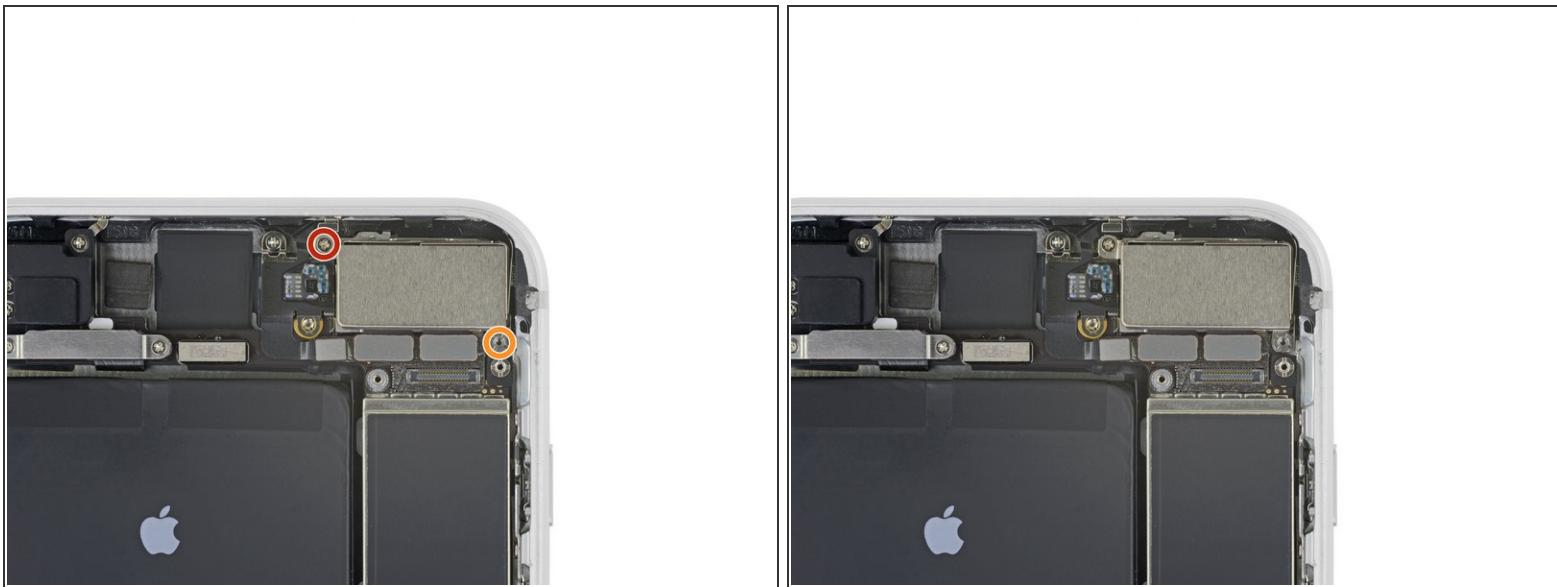


- Remove the two screws securing the rear camera module cover plate:
  - One 1.8 mm Phillips screw
  - One 2.7 mm (nonferrous) standoff screw

*(i)* Standoff screws are best removed using an [iPhone Standoff Screwdriver Bit](#) and [driver handle](#).

! In a pinch, a small flathead screwdriver will do the job—but use extra caution to ensure it doesn't slip and damage nearby components.

## Step 24

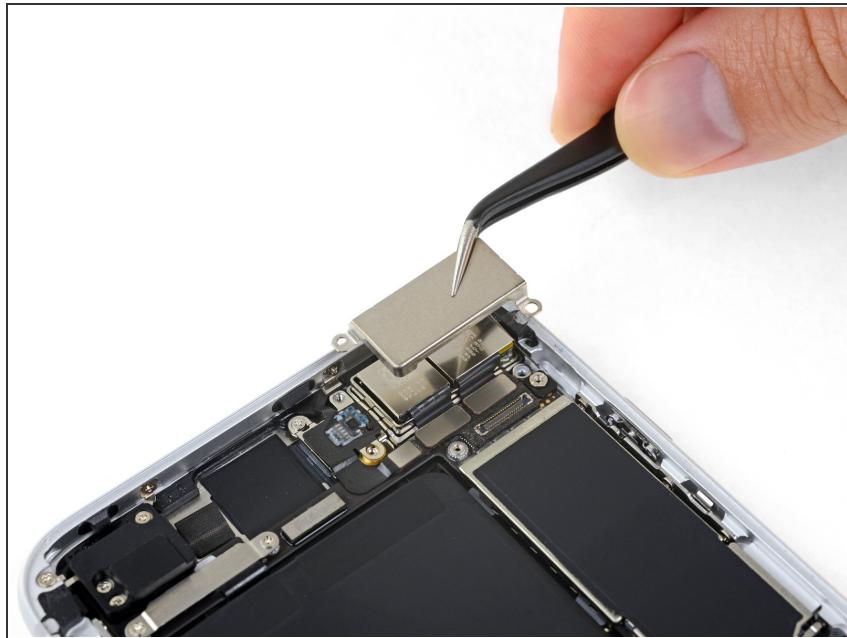

- Remove the cover plate from the rear camera module.

## Step 25



- Use an iFixit opening tool or a fingernail to disconnect the two camera cable connectors by prying them straight up from their sockets.

## Step 26



- Use the flat end of a spudger to pry up the rear-facing camera assembly from the top edge of the iPhone.
- *(i)* If you have trouble, switch to the point of your spudger and lever the camera out from its top right corner.

## Step 27



- Remove the rear-facing camera assembly.

## Step 28 — Top Left Antenna




- Remove three Phillips screws securing the upper left antenna component:
  - Two 1.3 mm screws
  - One 3.1 mm screw

## Step 29



- Remove the 1.3 mm Phillips screw securing the antenna component to the top edge of the rear case.

## Step 30

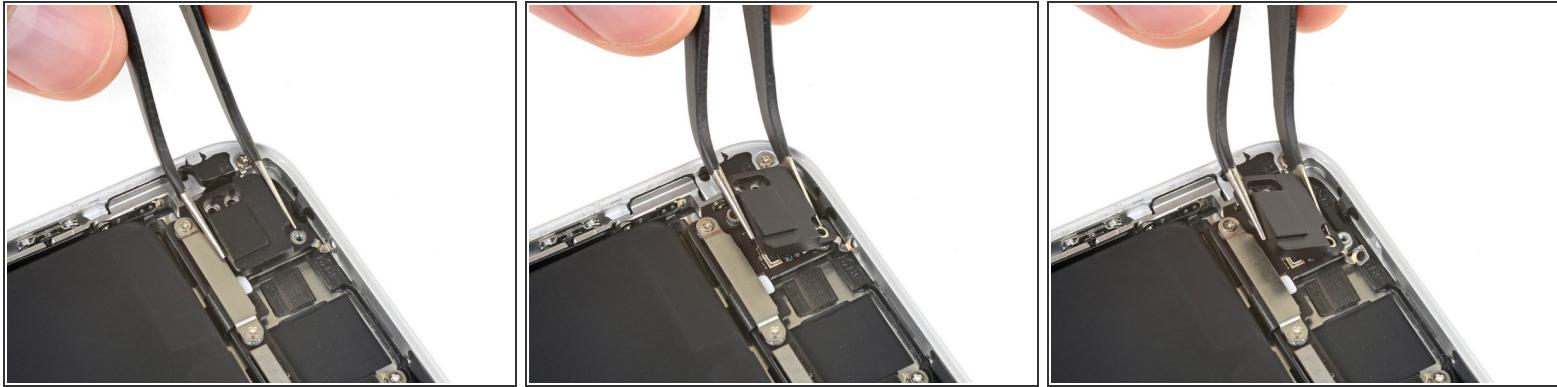

*(i)* The screw boss at the top of the antenna component is tucked into a small recess in the top edge of the iPhone.

- Tilt the antenna component up towards the top of the phone.
- Slide the screw boss down and out of its recess.

## Step 31



- Remove the top left antenna component.

## Step 32 — Wi-Fi Diversity Antenna




- Remove the three screws securing the L-shaped bracket next to the Taptic Engine:
  - One 1.3 mm Y000 screw
  - One 2.6 mm Phillips screw
  - One 3.5 mm Phillips screw

## Step 33



- Remove the bracket.

## Step 34

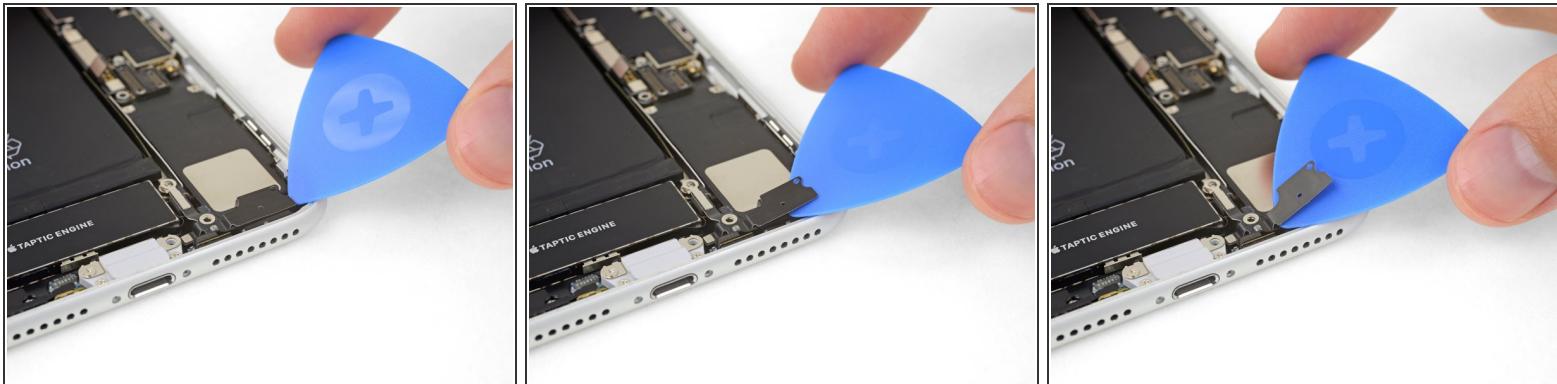

- Use an opening pick to gently separate the adhered portion of the antenna flex cable from the top surface of the speaker.


*(i)* This portion of the flex cable is lightly adhered in place. If necessary, apply a little heat from an iOpener or hair dryer to soften the adhesive. This makes it easier to separate (and re-adhere) the flex cable safely.

## Step 35



- Use the point of a spudger to pry up and disconnect the antenna flex cable from the logic board.

## Step 36

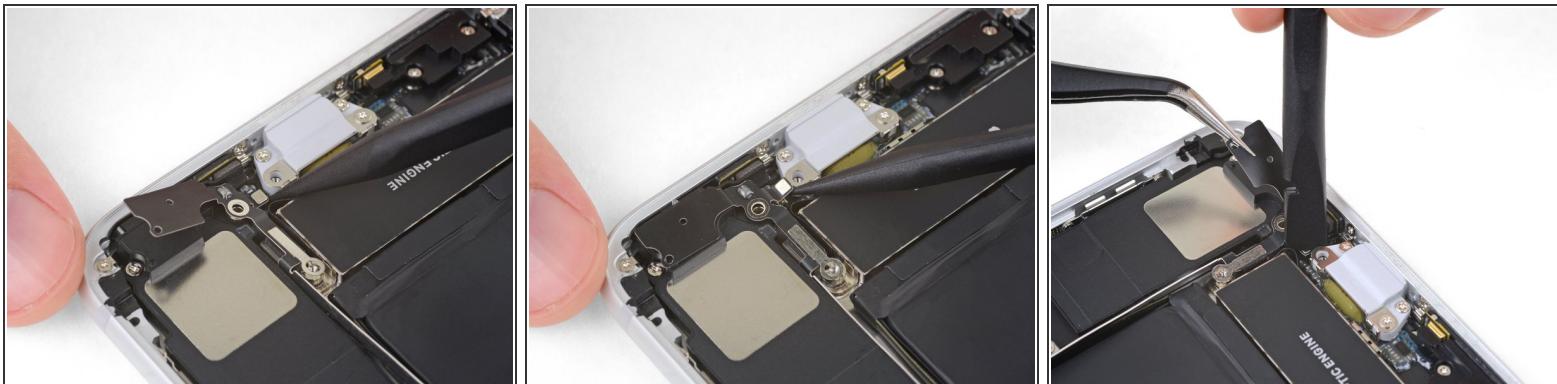

- Use the point of your spudger to pry up and disconnect the other end of the antenna flex cable from its socket, next to the Lightning Port.

 Reconnecting this cable can be tricky. Make it easier by using your tweezers to hold the flex cable so the connector aligns with its socket. Then, gently press down on the connector with the flat of your spudger until it clicks into place.

## Step 37



- Remove the Wi-Fi diversity antenna.

## Step 38 — Taptic Engine




- Remove the three screws securing the Taptic Engine:

- Two 1.5 mm Phillips screws
- One 2.4 mm standoff screw

*(i)* Standoff screws are best removed using an [iPhone Standoff Screwdriver Bit](#) and [driver handle](#).


 In a pinch, a small flathead screwdriver will do the job—but use extra caution to ensure it doesn't slip and damage surrounding components.

## Step 39

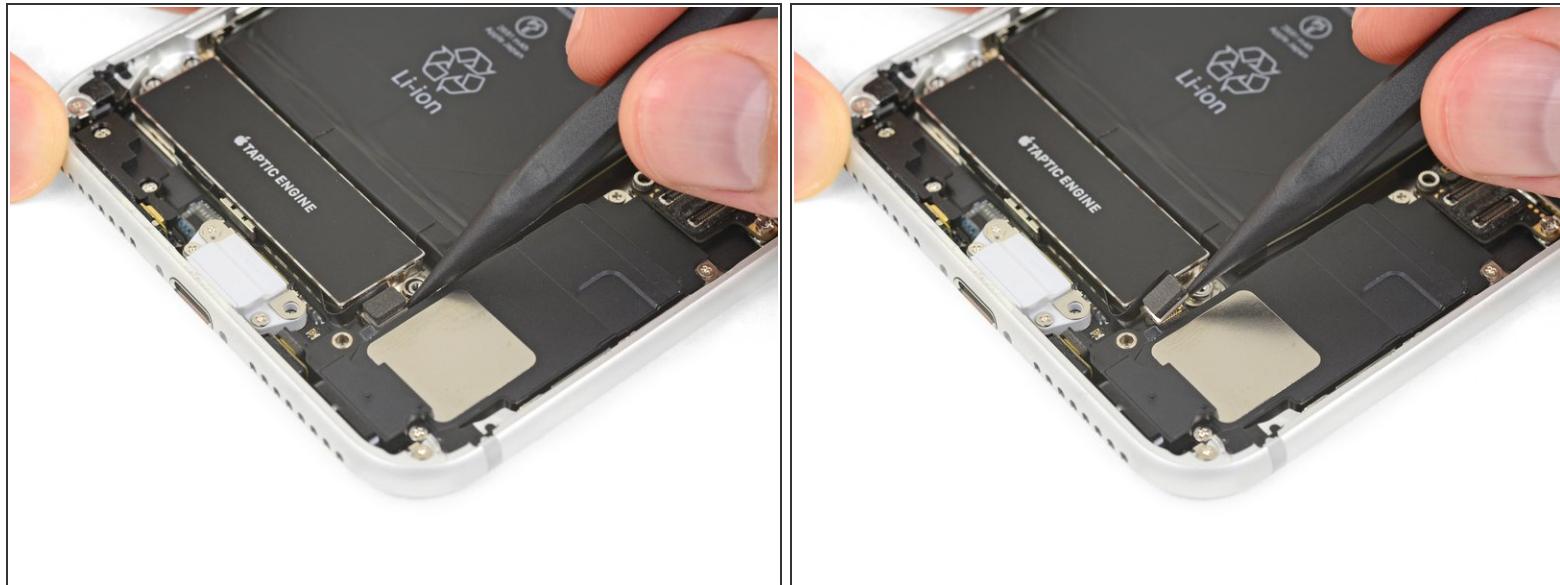

- Use the point of your spudger to pry up and disconnect the Taptic Engine flex cable.

## Step 40

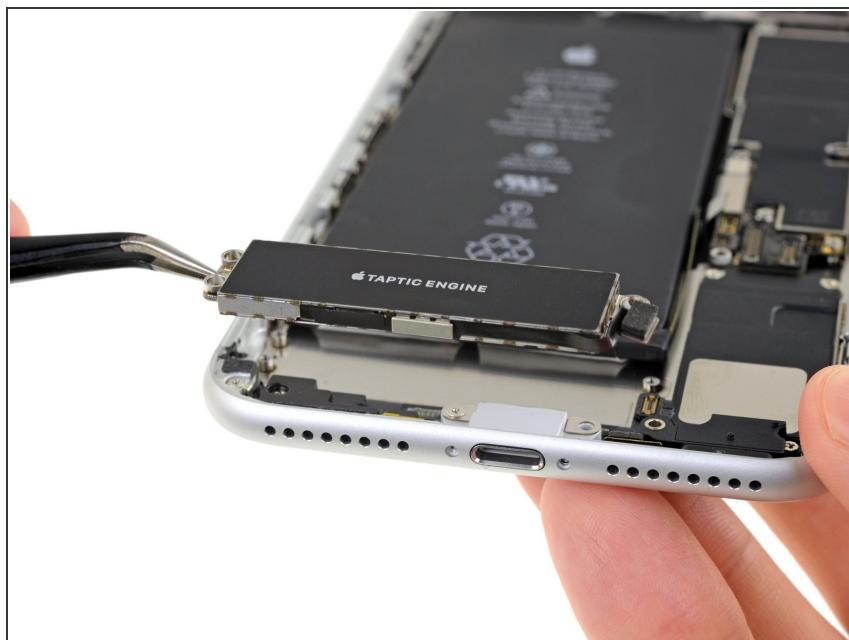

- Remove the Taptic Engine.

## Step 41 — SIM Card




- Insert a SIM card eject tool or a paperclip into the small hole in the SIM card tray.
- Press firmly to eject the tray.

## Step 42



- Remove the SIM card tray from the iPhone.
- *(i)* The SIM card will fall out of the tray easily.
- When reinserting the SIM card, ensure that it is in the proper orientation relative to the tray.
- A thin rubber gasket around the SIM tray provides water and dust protection. If this gasket is damaged or missing, replace the gasket or the entire SIM tray to protect your iPhone's internal components.

## Step 43 — Lightning Connector Assembly

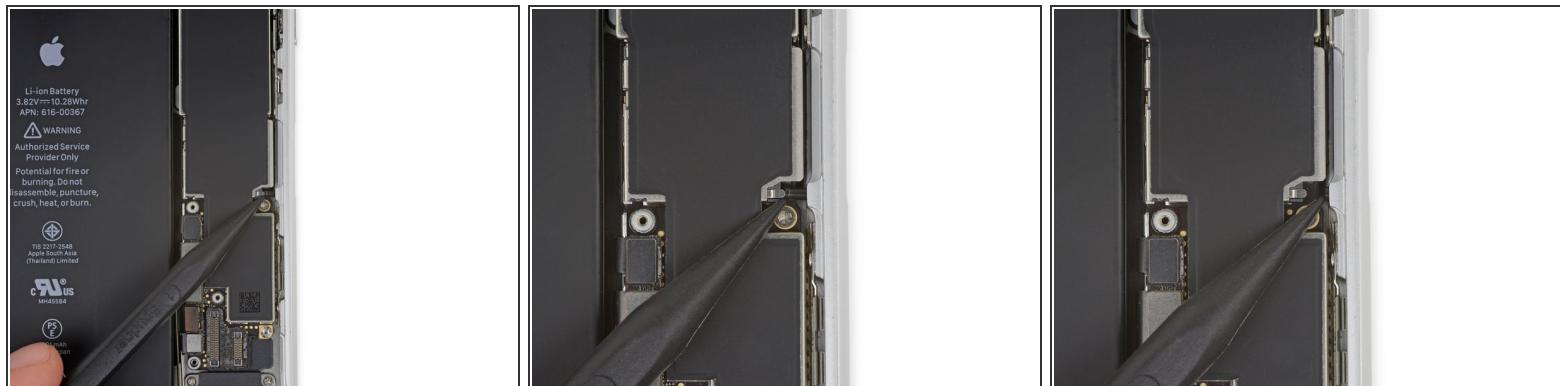

- Use the point of a spudger to push the SIM card eject plunger out of the logic board's way.


## Step 44



- Remove two Phillips screws securing the bracket over the upper cable connector:
  - One 3.1 mm screw
  - One 1.3 mm screw


☞ Remember, the longer screw goes on the *left*.

## Step 45

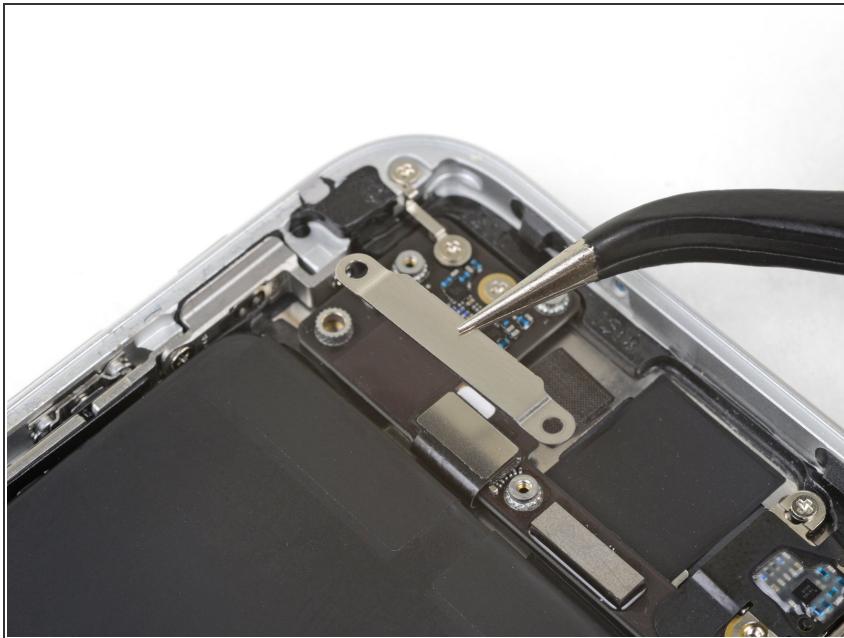


- Remove the upper cable connector bracket.

## Step 46

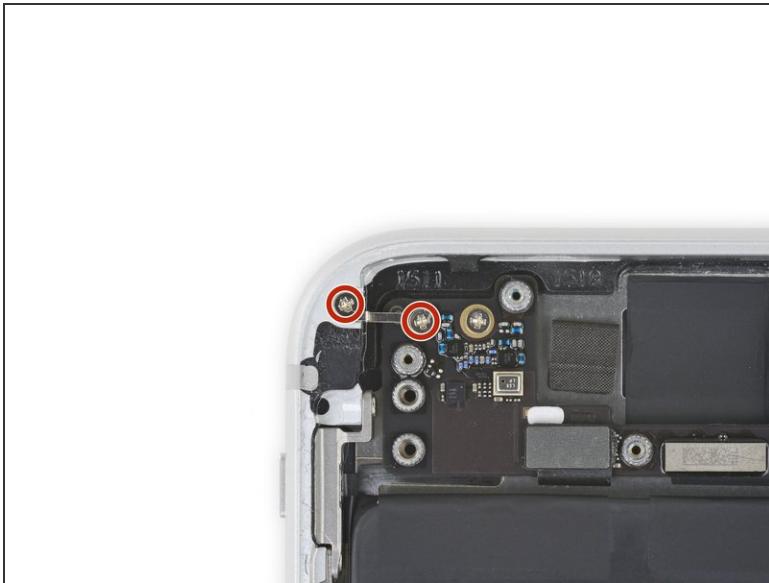

- Remove the two 1.2 mm Phillips screws securing the grounding clip at the top left edge of the logic board.

## Step 47

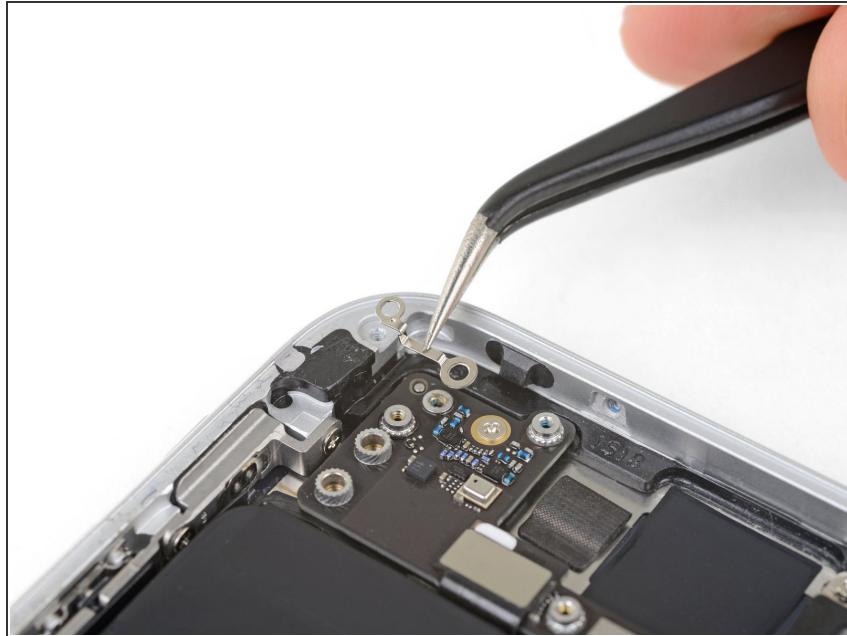

- Remove the grounding clip.

## Step 48



- Remove the 1.2 mm Phillips screw securing the antenna flex cable to the top edge of the iPhone's rear case.

## Step 49



- Use a fingernail or the sharp end of an iFixit opening tool to pry up and disconnect the antenna flex cable connector from the logic board.

## Step 50



- Slide the flat edge of a spudger underneath the antenna flex cable to separate the adhesive holding it in place.

## Step 51



ⓘ The screw boss at the top of the antenna flex cable is tucked into a small recess in the top edge of the iPhone.

- Tilt the antenna flex cable up toward the top of the iPhone.
- Slide the screw boss down and out of its recess.
- Remove the antenna flex cable.

## Step 52



- Remove the three Phillips screws securing the lower speaker:
  - Two 1.4 mm screws
  - One 2.4 mm screw

ⓘ During reassembly, press the speaker toward the bottom edge of the iPhone until the screw holes align, and hold it there while you install the screws.

## Step 53



- Remove the lower speaker.

## Step 54



- Prying from the top edge, use your fingernail or a spudger to pry up and disconnect the upper cable connector.

## Step 55



- Use the point of a spudger to carefully pry up and disconnect the wireless charging coil's flex cable.

## Step 56



- Use the point of a spudger to pry up and disconnect the Lightning connector assembly's flex cable from the logic board.

## Step 57



- Remove the five screws securing the logic board:
  - Two 1.8 mm Phillips screws
  - One 2.3 mm standoff screw
  - One 2.4 mm standoff screw
  - One 2.7 mm standoff screw

*(i)* Standoff screws are best removed using an [iPhone Standoff Screwdriver Bit](#) and [driver handle](#).

**⚠** In a pinch, a small flathead screwdriver will do the job—but use extra caution to ensure it doesn't slip and damage surrounding components.

## Step 58




- Lift the logic board from the bottom edges and slide it toward the bottom of the iPhone to remove it.  
 Be careful not to snag the logic board on any cables.
- ▣ During reassembly, note the position of the black grounding clip at the top right edge of the logic board, near the rear cameras. The logic board should slide *underneath* the clip.

## Step 59




- Remove the two Phillips screws securing the barometric vent at the bottom left corner of the iPhone:
  - One 3.2 mm screw
  - One 1.8 mm screw

## Step 60

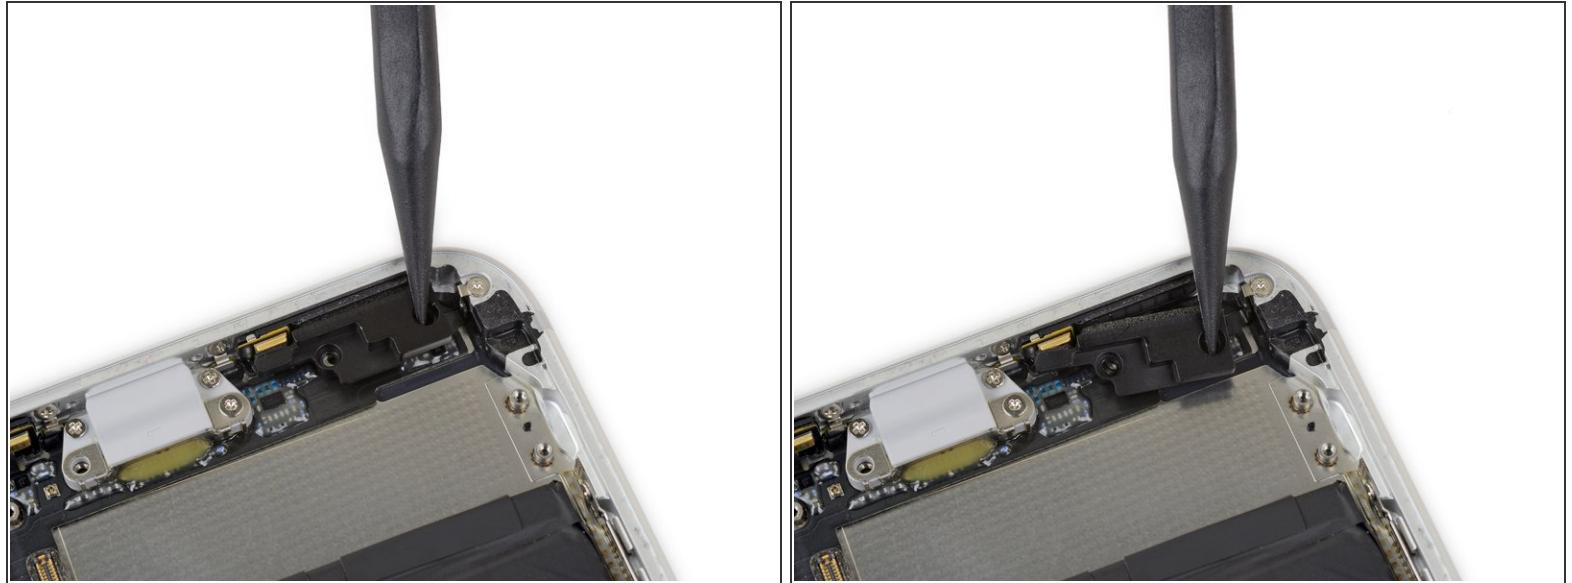

- Gently push the barometric vent in the direction of the battery to separate the adhesive securing the vent to the bottom edge of the iPhone.

## Step 61

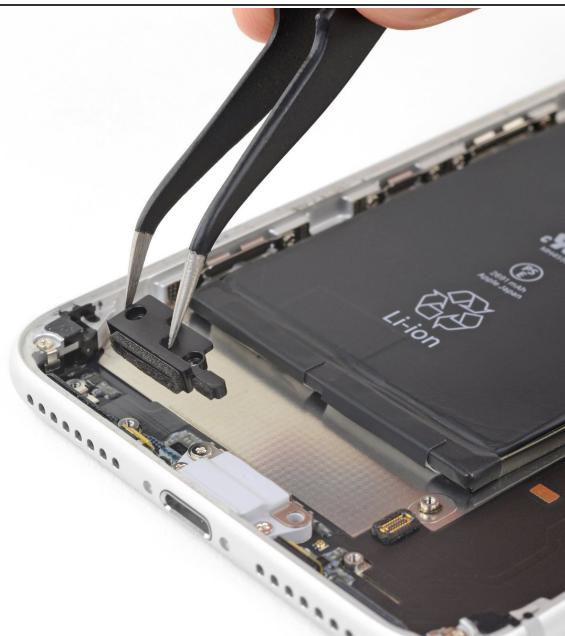

- Remove the vent.

## Step 62



- Remove the five Phillips screws securing the Lightning connector assembly to the rear case:
  - Two 1.2 mm screws
  - Two 2.4 mm screws
  - One 2.5 mm screw

## Step 63



- Remove the two 1.3 mm Phillips screws securing the Lightning port to the bottom edge of the iPhone.

## Step 64



- Use the sharp edge of an iFixit Opening Tool to pry the two microphones free from the adhesive securing them to the lower edge of the iPhone.

⚠ Don't try to completely remove the microphones; just separate the adhesive as shown.

## Step 65



- Apply an iOpener or use a hair dryer to heat the rear case behind the Lightning connector flex cable. This will soften the adhesive securing the flex cable, making it easier to separate.


## Step 66



- Use the flat edge of a spudger to gently fold the battery flex cable connector away from the upper portion of the Lightning connector assembly.

**⚠** In the following steps, as you separate the Lightning connector assembly, be careful not to accidentally damage the battery flex cable.


## Step 67

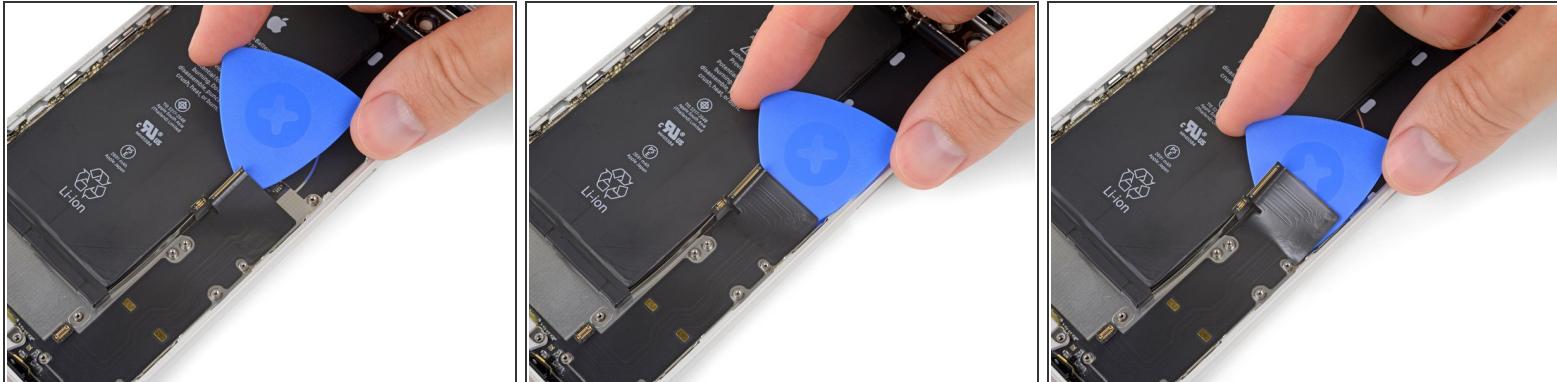

- Slide an opening pick or thin pry tool underneath the top portion of the Lightning connector assembly flex cable.
- Gently slide the pick toward the *outside edge* of the iPhone (away from the battery).

**⚠** Part of the wireless charging coil lies directly underneath this portion of the Lightning connector flex cable. Aggressive prying may damage the coil.
- i** If needed, use your hair dryer or iOpener repeatedly to re-heat the area behind the Lightning connector assembly flex cable in order to make it easier to separate.

## Step 68

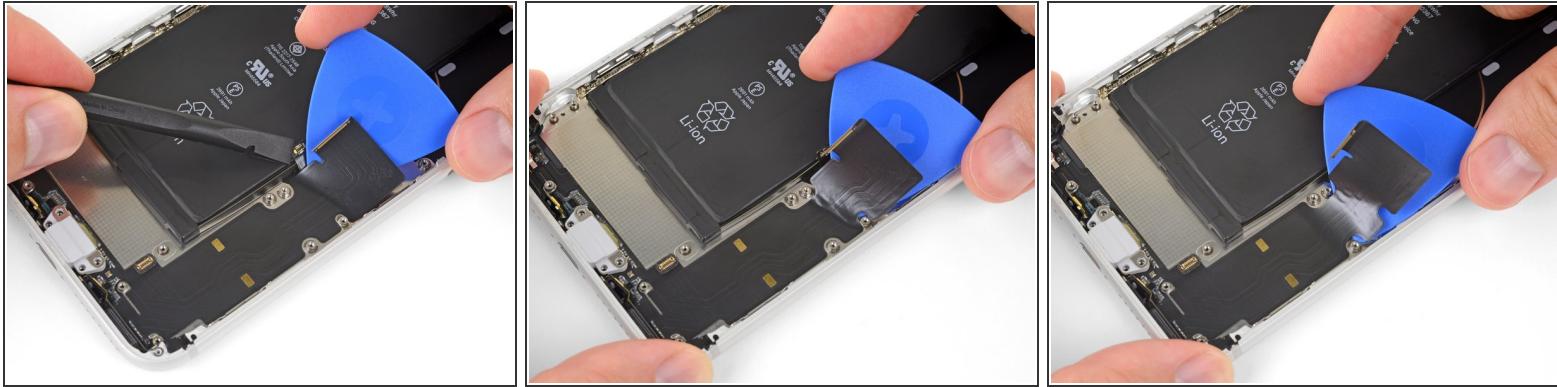

- Continue separating the upper portion of the Lightning connector flex cable, being careful not to damage any other components along the way.

 Keep the battery connector gently folded to the side so as not to damage it.


 Be very careful not to damage the battery itself. A punctured battery can leak dangerous chemicals and/or catch fire.

## Step 69




- Continue separating the Lightning connector assembly's flex cable until you pass the lower edge of the battery.

## Step 70

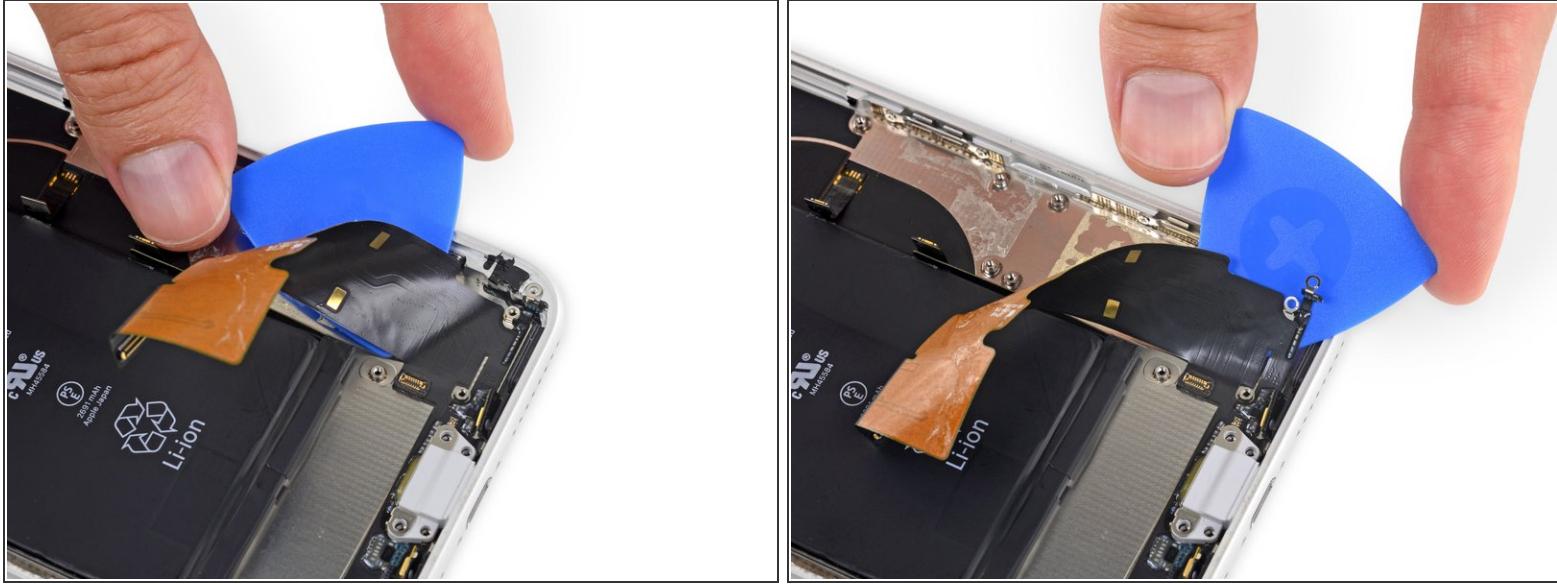

- Carefully slide your pick from the corner of the battery to the corner of the iPhone to separate the portion of the flex cable adhered to the outer frame.

## Step 71

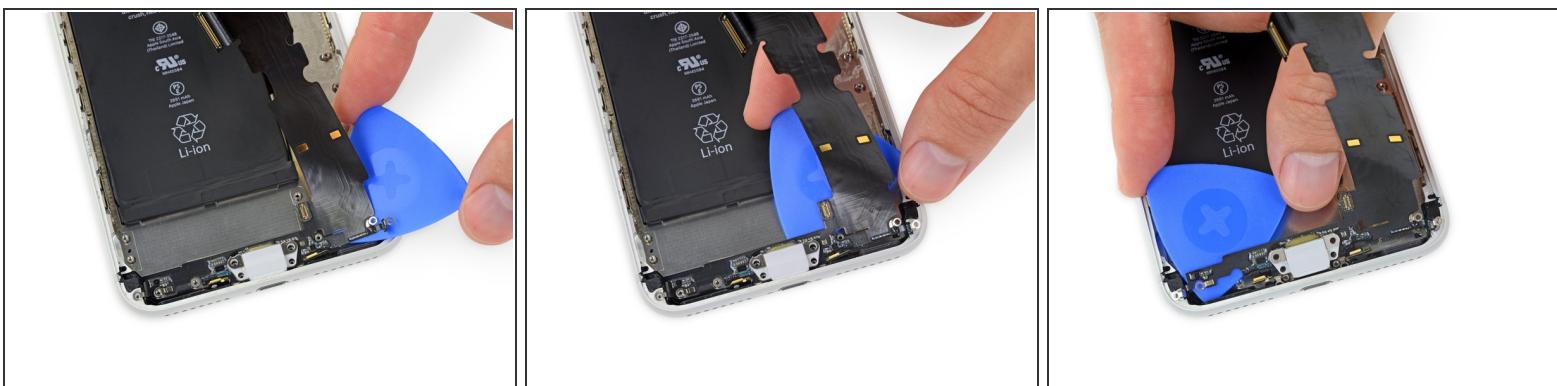

- Slide your pick across the width of the iPhone to separate all the remaining areas of the Lightning connector assembly from the rear case.

## Step 72



- Remove the Lightning connector assembly.
- ☒ Before installing or replacing the Lightning connector assembly:
  - Use a plastic tool to scour any bits of adhesive residue from the rear case.
  - Thoroughly clean any remaining residue from the surface with isopropyl alcohol (90% concentration or greater) and a lint-free cloth. Wipe in one direction only, not back and forth.

## Step 73



- ★ A rubber gasket on the bottom of the Lightning connector protects your iPhone from liquid and dust intrusion. If you are installing a new Lightning connector assembly, you may need to carefully remove and transfer the gasket to the new part.
- ★ The small adhesive patch on the bottom of each microphone also protects your iPhone from liquid and dust intrusion. For best results, replace the two adhesive patches before installing your Lightning connector assembly.
- ★ **Important:** During installation, correctly position your new Lightning connector assembly so that the cutouts in the cable are exactly centered around the four screw bosses in the rear case. Otherwise, the flex cable will be misaligned and you won't be able to [reconnect it to its socket](#) on the logic board.

Compare your new replacement part to the original part—you may need to transfer remaining components or remove adhesive backings from the new part before installing.

**To reassemble your device, follow the above steps in reverse order.**

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Check out our [Answers community](#) for troubleshooting help.