




# iPhone XR Earpiece and Front Sensor Assembly Replacement

Remove or replace the earpiece speaker assembly in an iPhone XR—including the flood illuminator, proximity sensor, ambient light sensor, and microphone.

Written By: Adam O'Camb

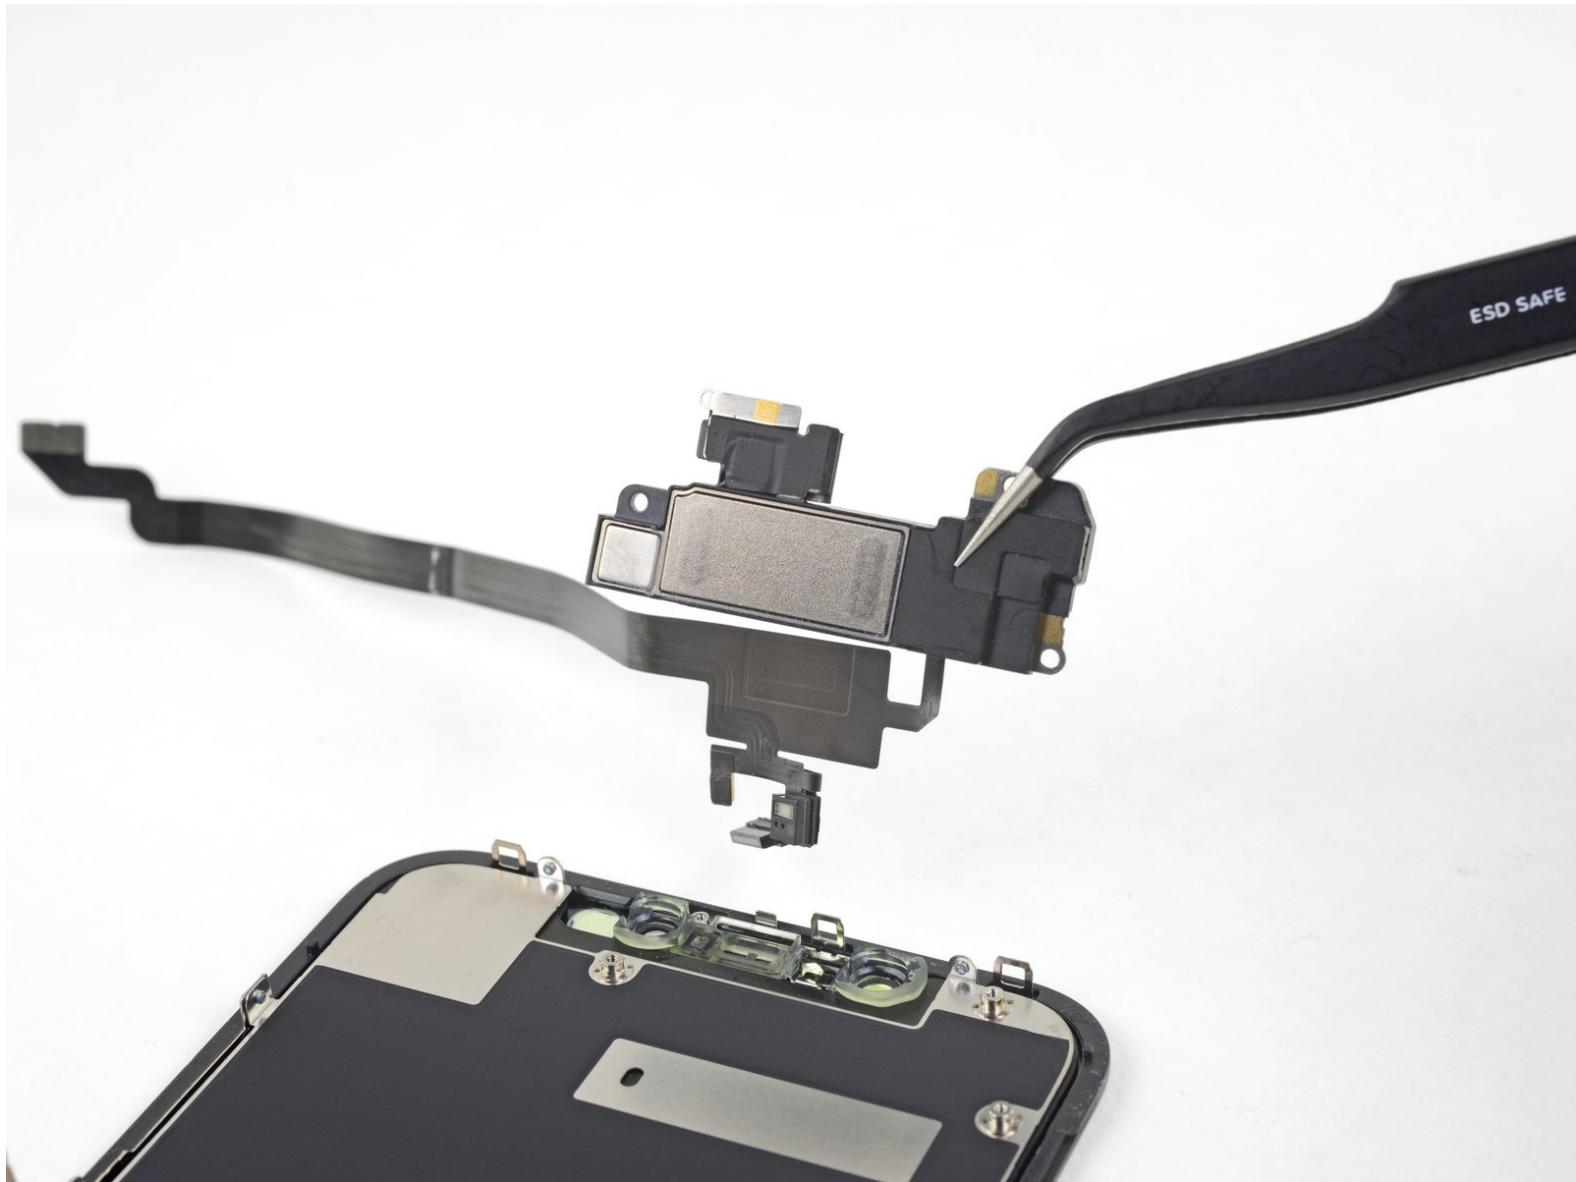

This document was generated on 2020-04-18 06:18:50 AM (MST).

## INTRODUCTION

Follow the steps in this guide to remove, transfer, and/or replace the earpiece speaker and front sensor assembly in your iPhone XR. This assembly includes the earpiece speaker, microphone, ambient light sensor, flood illuminator, and proximity sensor.

**This assembly is paired to your individual iPhone from the factory**, so you must transfer it from your old display to your new one during any display replacement.

The flood illuminator forms part of the biometric [Face ID](#) security feature, and Face ID functions will fail if the original component is damaged or incorrectly installed. Replacing it with a new part will also cause Face ID to fail, so take extra care not to damage any of these components during this procedure. If damaged, only Apple can restore Face ID function.

### TOOLS:


- [P2 Pentalobe Screwdriver iPhone](#) (1)
- [iOpener](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Suction Handle](#) (1)
- [iSclack](#) (1)
- [Tri-point Y000 Screwdriver Bit](#) (1)
- [Phillips PH000 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)

### PARTS:

- [iPhone XR Earpiece Speaker](#) (1)

*This is a pro-only part that requires microsoldering and a second component, procedures not covered in this guide.*

## Step 1 — Remove the pentalobe screws

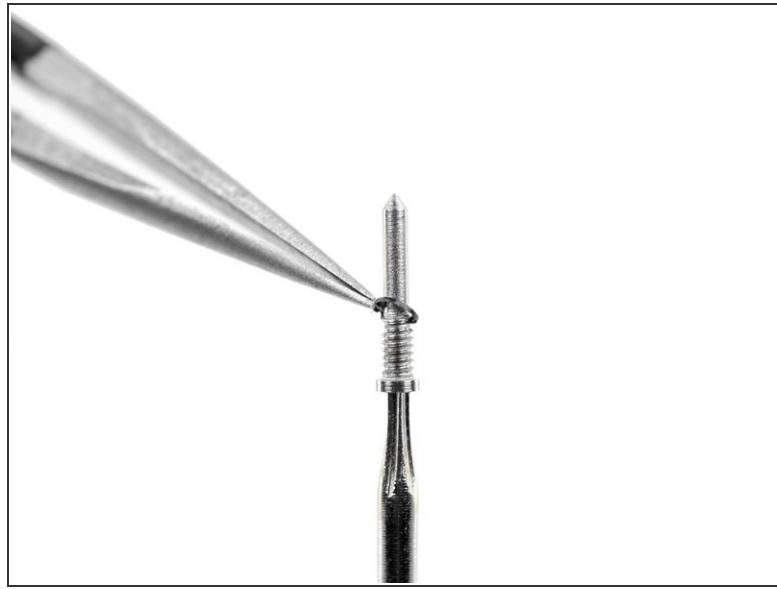

**⚠** Before you begin, discharge your iPhone battery below 25%. A charged lithium-ion battery can catch fire and/or explode if accidentally punctured.

- Power off your iPhone before beginning disassembly.
- Remove the two 6.7 mm-long pentalobe screws at the bottom edge of the iPhone.
- Opening the iPhone will compromise its waterproof seals. Have replacement seals ready before you proceed past this step, or take care to avoid liquid exposure if you reassemble your iPhone without replacing the seals.
- There's a black rubber gasket just beneath the head on each pentalobe screw. For maximum protection against dust and liquid, check the condition of the gaskets or replace the screws during reassembly.

## Step 2 — Heat up the screen



**i** Heating the lower edge of the iPhone helps soften the adhesive securing the display, making it easier to open.

- Use a hairdryer or heat gun, or [prepare an iOpener](#) and apply it to the lower edge of the iPhone for about a minute in order to soften up the adhesive underneath.

## Step 3 — Apply suction cup(s)



- (i)* The next two steps demonstrate the iSclack, a handy tool that we recommend for anyone doing frequent repairs. **If you aren't using the iSclack, skip down two steps for an alternate method.**
- If the plastic depth gauge is attached at the center of the iSclack, remove it now—it's not needed for larger phones like the iPhone XR.
  - Position the suction cups near the bottom edge of the iPhone—one on the front, and one on the back.
  - Press both suction cups firmly into place.
- (i)* If your display or back glass is badly cracked, [covering it with a layer of clear packing tape](#) may help the suction cups adhere. The iSclack also includes two pieces of tape for this purpose.

## Step 4



- Hold onto your iPhone securely and close the handle of the iSclack to slightly separate the screen from the rear case of the phone.  
**⚠** Don't try to completely separate the screen; a small opening along the bottom edge is all you need.
- Insert an opening pick into the gap under the display on the lower edge of the iPhone.
- **Skip the next two steps and continue to step 8.**

## Step 5



- If you're using a single suction handle, apply it to the bottom edge of the phone, while avoiding the curved portion of the glass.
  - ⓘ If your display is badly cracked, [covering it with a layer of clear packing tape](#) may allow the suction cup to adhere. Alternatively, very strong tape may be used *instead of* the suction cup. If all else fails, you can superglue the suction cup to the broken screen.

## Step 6 — Lift the display slightly



- Pull up on the suction cup with firm, constant pressure to create a slight gap between the front panel and rear case.
  - Insert an opening pick into the gap.
- (i)* The watertight adhesive holding the display in place is very strong; creating this initial gap takes a significant amount of force. If you're having a hard time opening a gap, apply more heat, and gently rock the screen up and down to weaken the adhesive until you create enough of a gap to insert your tool.

## Step 7 — Separate the screen adhesive



- Slide the opening pick around the lower left corner and up the left edge of the iPhone, slicing through the adhesive holding the display in place.
- ⚠** Don't insert the opening pick too far into the iPhone, or you may cause damage to internal components.


## Step 8



- Re-insert your pick at the bottom edge of the iPhone, and slide it up the right side to continue separating the adhesive.

! Don't insert the pick very far, or you may damage the display cables along this side of the iPhone. Insert it only a few millimeters, or about the width of the display bezel.

## Step 9

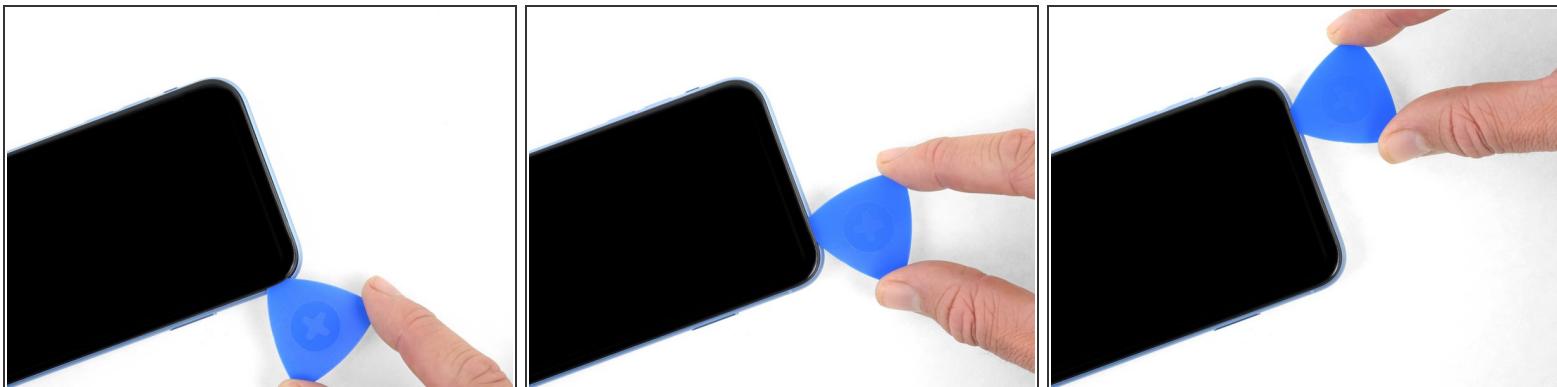

i The top edge of the display is secured with both glue and clips.

- Slide the opening pick around the top corner of the display, while gently pulling or wiggling the display **down** in the direction of the Lightning port.

! The clips will break if you use too much force. Work carefully and be patient.

! Again, don't insert the pick more than a few millimeters—about the width of the display bezel—or you may damage the front panel sensor array.

- Slide the pick to the opposite corner and cut any remaining adhesive securing the display.

## Step 10





- Pull on the small nub on the suction cup to remove it from the front panel.
- If you used an iSclack and it's still affixed to the iPhone, remove it now.

## Step 11 — Open the iPhone



- Open the iPhone by swinging the display up from the left side, like the back cover of a book.
- ⚠ Don't try to fully separate the display yet, as several fragile ribbon cables still connect it to the iPhone's logic board.
- Lean the display against something to keep it propped up while you're working on the phone.
- 📌 During reassembly, lay the display in position, align the clips along the top edge, and carefully press the top edge into place before snapping the rest of the display down. If it doesn't click easily into place, check the condition of the clips around the perimeter of the display and make sure they aren't bent.

## Step 12 — Unscrew the battery connector cover

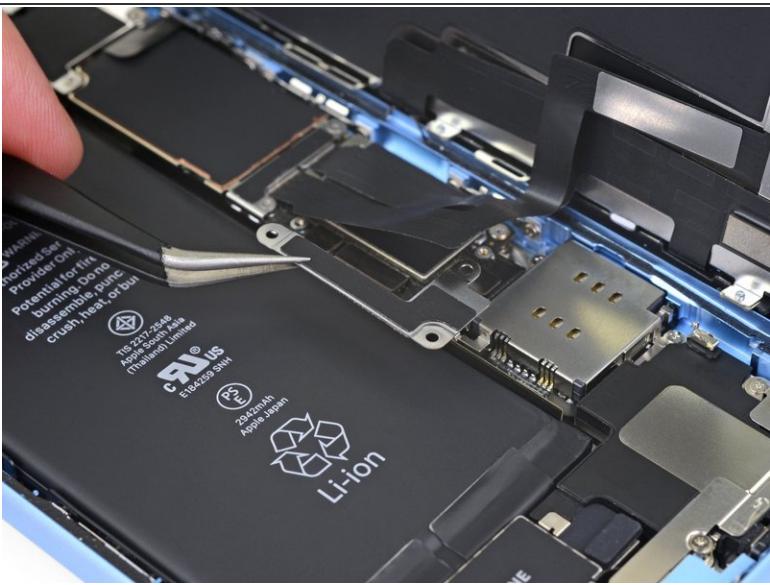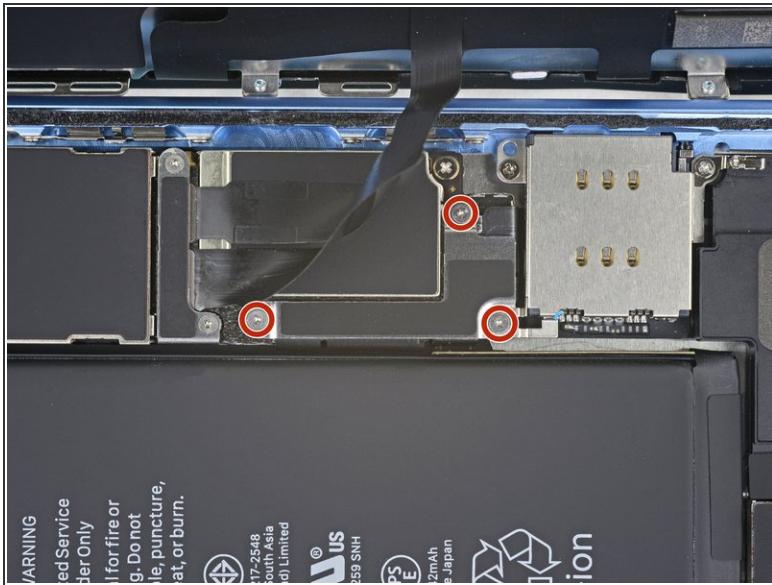


- Remove three 1.2 mm Y000 screws securing the battery connector cover bracket.
  - Remove the bracket.

***i*** Throughout this repair, [keep track of each screw](#) and make sure it goes back exactly where it came from to avoid damaging your iPhone.


** Tip** During reassembly, this is a good point to power on your iPhone and test all functions before you seal the display in place. Be sure to power your iPhone back down completely before you continue working.

## Step 13 — Disconnect the battery

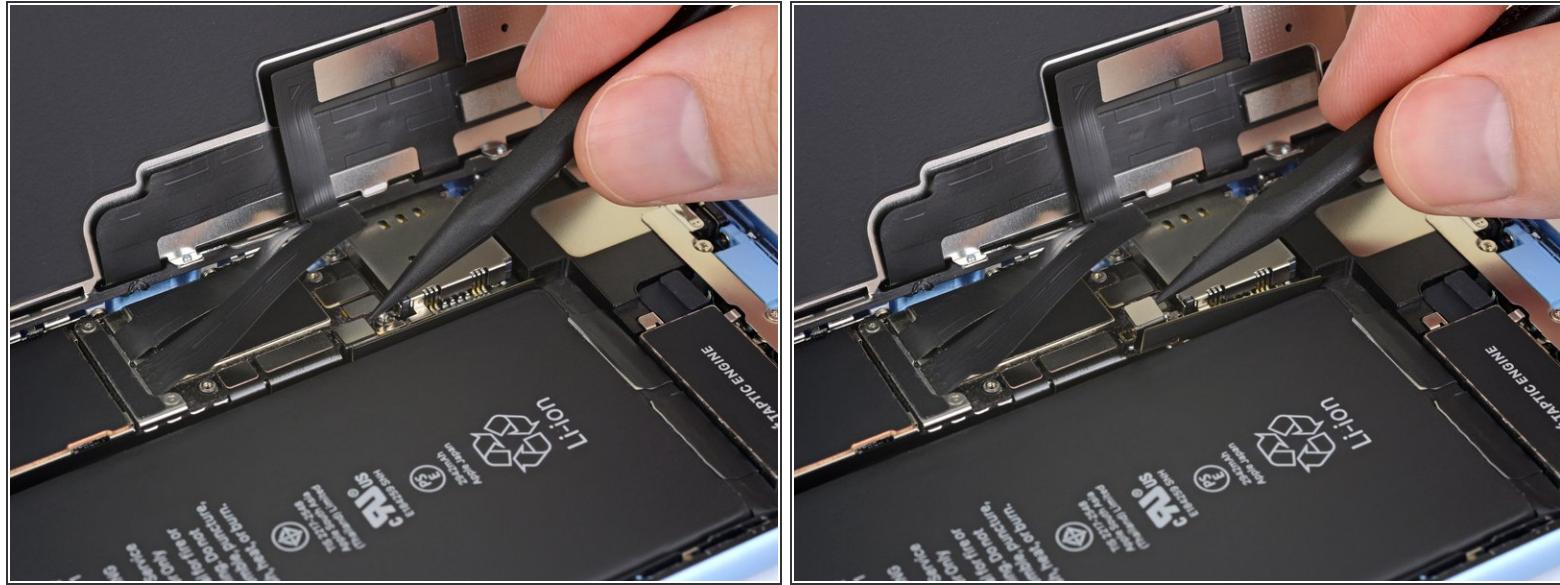



- Use the point of a spudger to pry the battery connector straight up out of its socket.
- *(i)* Try not to damage the black silicone seal surrounding this and other board connections. These seals provide extra protection against water and dust intrusion.
- Bend the connector slightly away from the logic board to prevent it from accidentally making contact with the socket and providing power to the phone during your repair.

## Step 14 — Unscrew the display connector cover

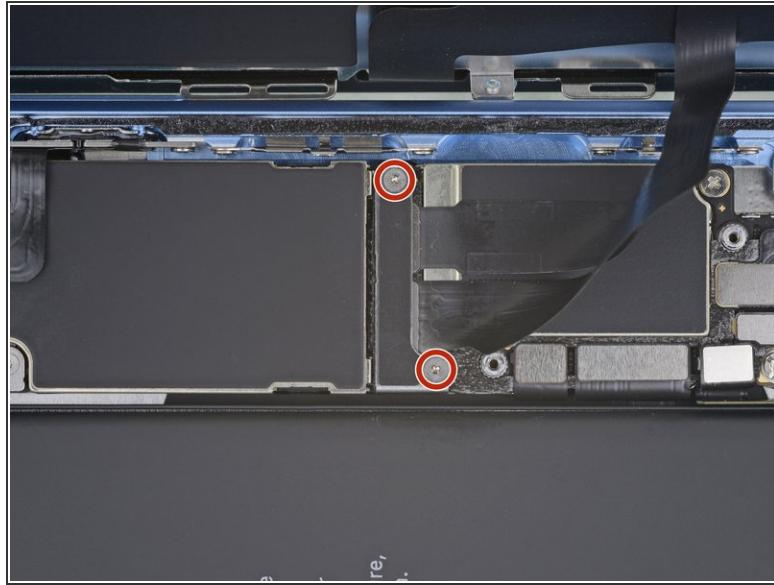



- Remove the two 1.2 mm Y000 screws securing the display connector bracket.
- Remove the bracket.

## Step 15 — Disconnect the digitizer

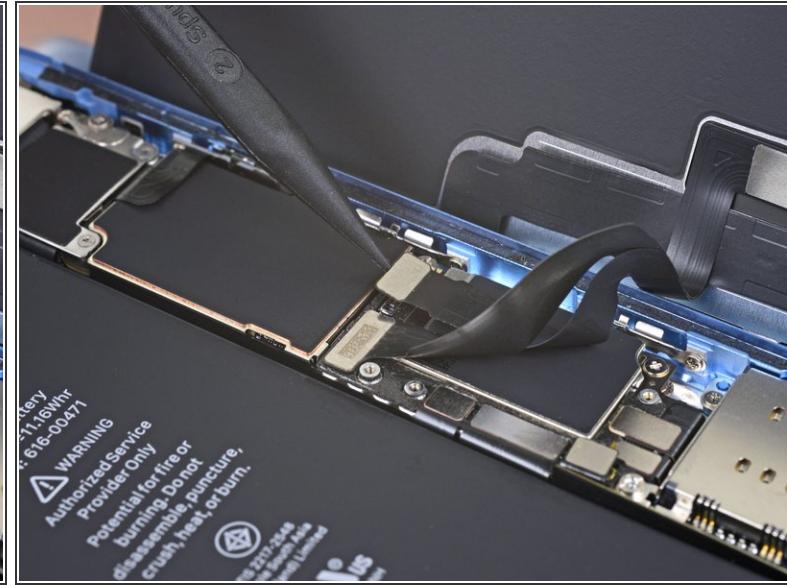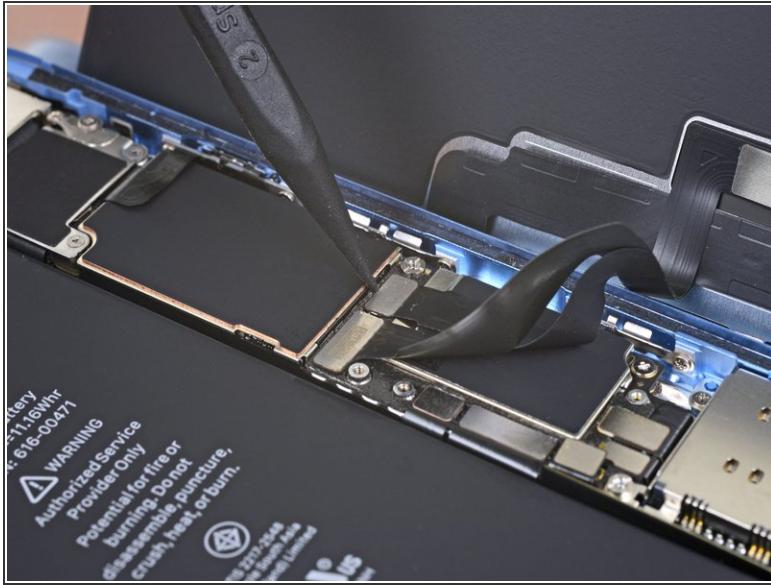



- Use the tip of a spudger to pry up and disconnect the digitizer cable.
- ☒ To re-attach [press connectors](#) like this one, carefully align and press down on one side until it clicks into place, then repeat on the other side. Do not press down on the middle. If the connector is misaligned, the pins can bend, causing permanent damage.
- ☒ If any part of your screen doesn't respond to touch after your repair, disconnect the battery and then re-seat this connector, making sure it clicks fully into place and that there's no dust or other obstruction in the socket.

## Step 16 — Disconnect the display

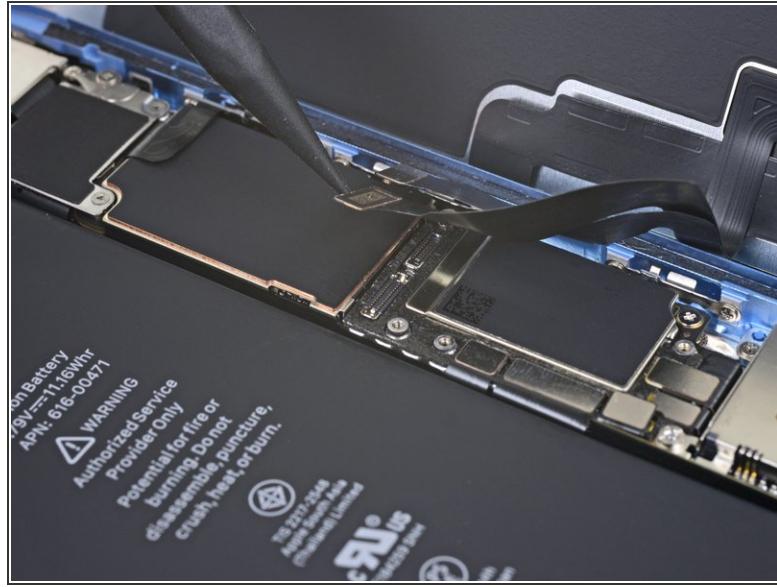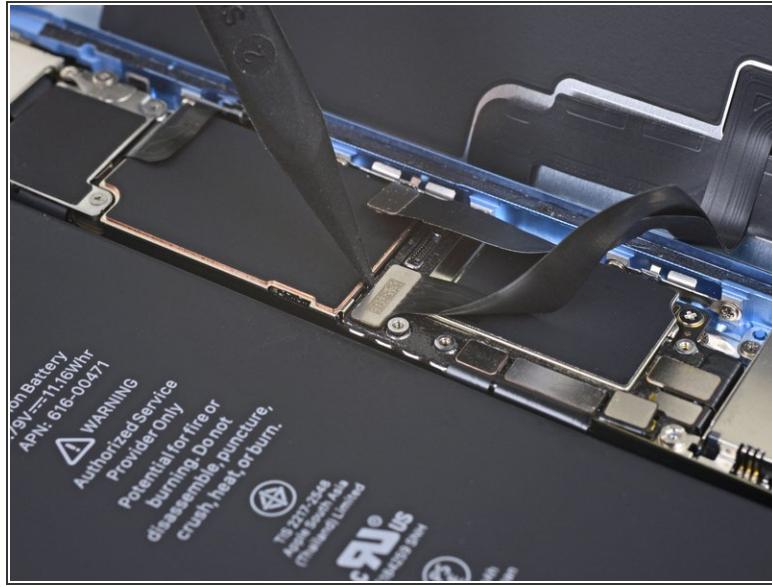


- Use the tip of a spudger to disconnect the display cable connector.

## Step 17 — Unscrew the logic board connector cover

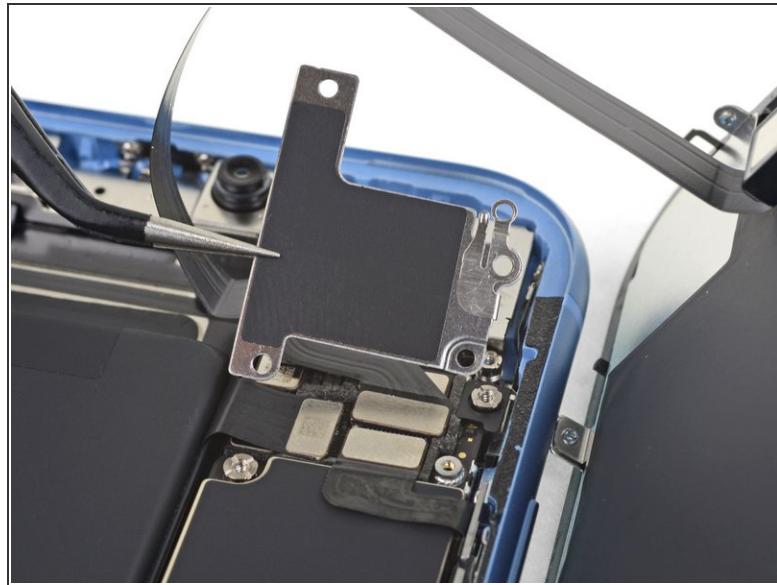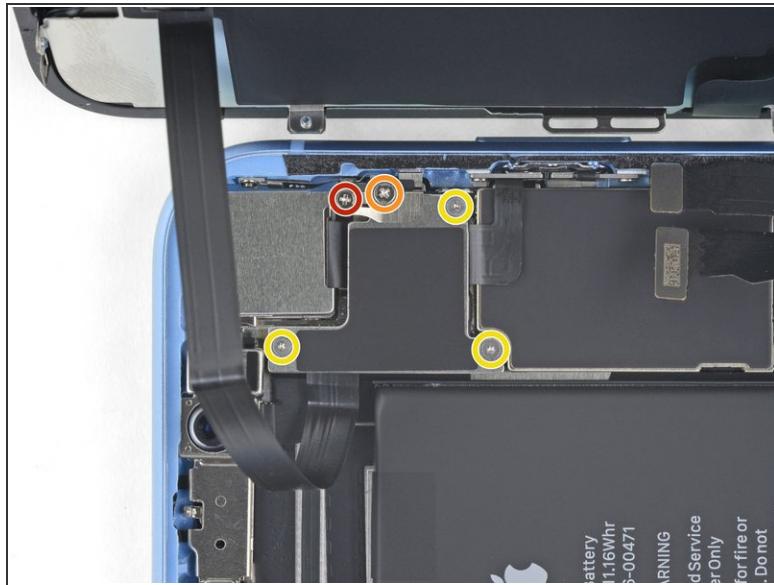


- Remove the five screws securing the logic board connector bracket to the rear case:
  - One 1.3 mm Phillips screw
  - One 1.5 mm Phillips screw
  - Three 1.2 mm Y000 screws
- Remove the bracket.
  - *(i)* Be careful not to lose the [smaller bracket](#) clipped onto the edge. It's secured with a [small clip](#) and is easy to accidentally knock off of the larger bracket.

## Step 18 — Disconnect the front sensors

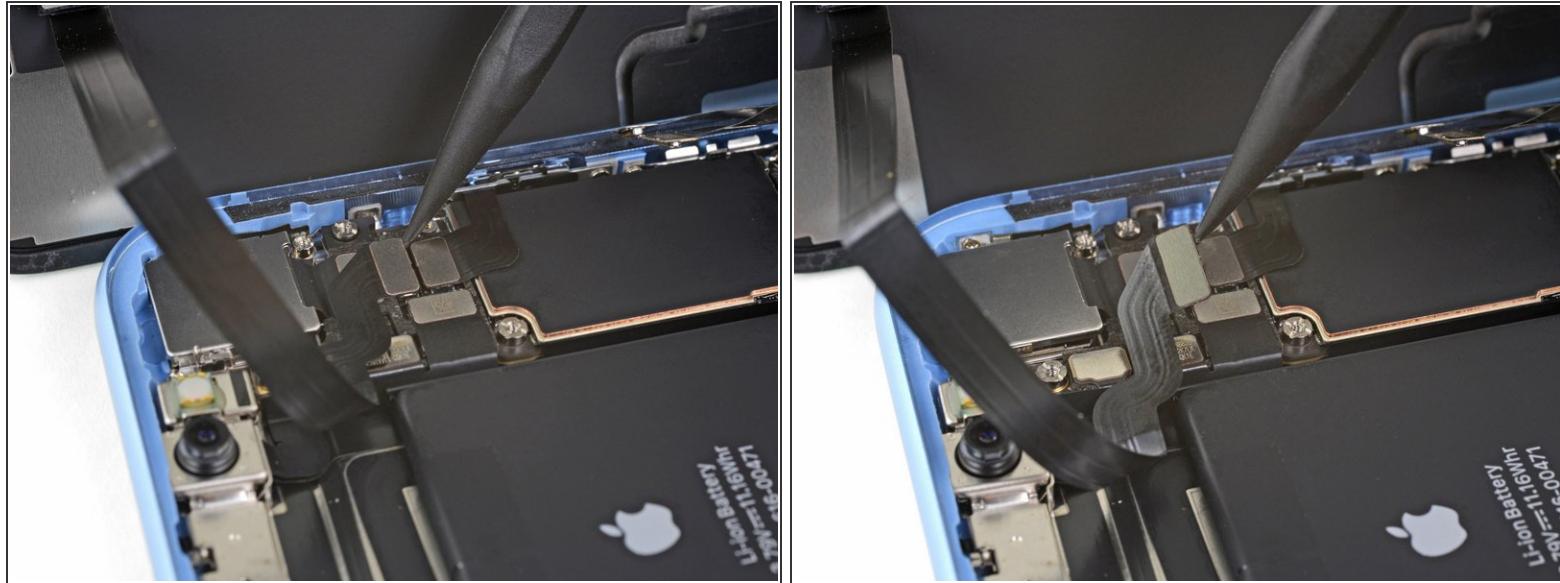

- Use the tip of a spudger to pry the front sensor assembly connector up from its socket.

## Step 19 — Remove the display assembly

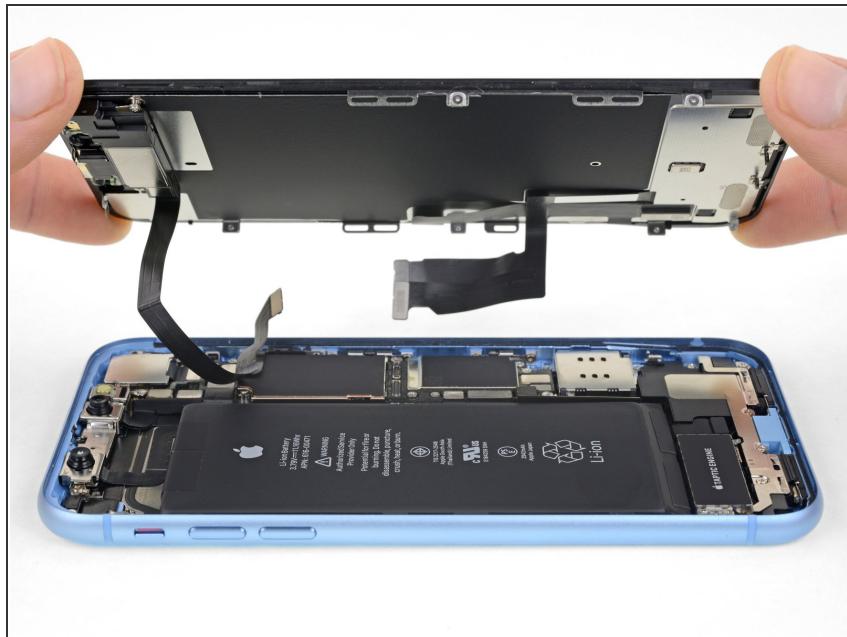

- Remove the display assembly.
- ➡ During reassembly, pause here if you wish to [replace the waterproof adhesive around the edges of the display.](#)

## Step 20 — Unscrew the earpiece speaker



- Remove the four screws securing the speaker/sensor assembly to the back of the display:
  - Two 1.6 mm Phillips screws
  - One 2.3 mm Phillips screw
  - One 1.2 mm Y000 screw


## Step 21 — Flip the speaker over



- Using tweezers, gently flip the speaker assembly over—down and away from the top edge of the display.


 The speaker remains attached via a very thin flex cable. Be careful not to strain or damage the cable.

## Step 22 — Heat the front sensor strip

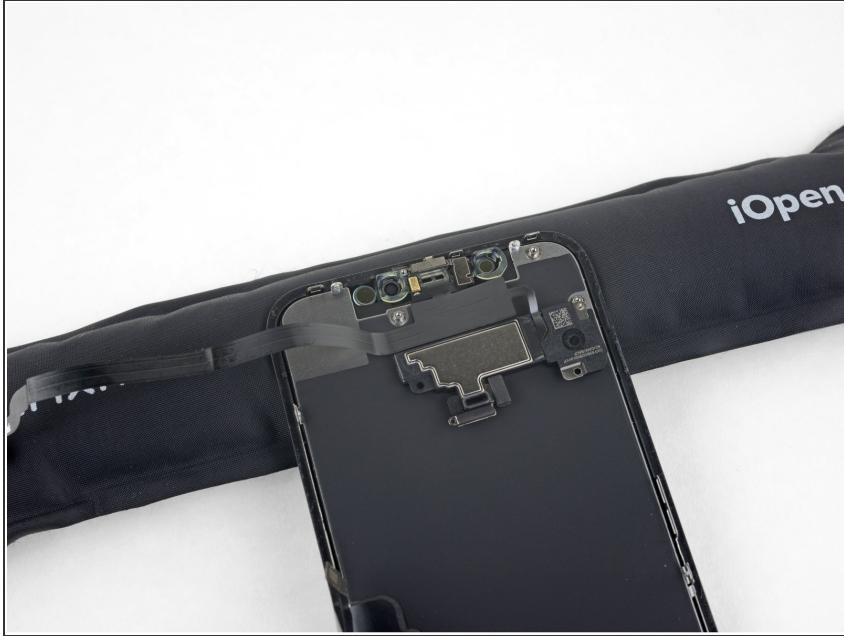


- Use a hairdryer, a heat gun, or a [heated iOpener](#) applied to the top front of the display for about a minute, in order to soften the adhesive securing the sensors.

## Step 23 — Pry up the microphone

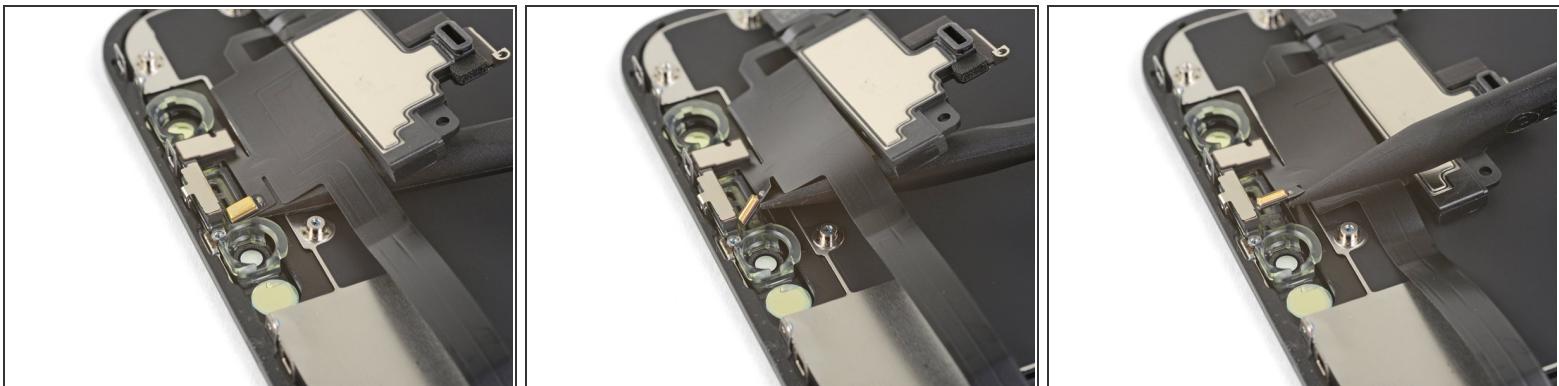


- Carefully slide the flat edge of a spudger underneath the flex cable below the microphone.
- Twist gently to separate the microphone, while being careful not to strain or damage the flex cable.
- If needed, use the point of the spudger to finish separating the microphone from its notch in the front panel. If the microphone remains difficult to separate, apply more heat.

## Step 24 — Pry up the proximity sensor

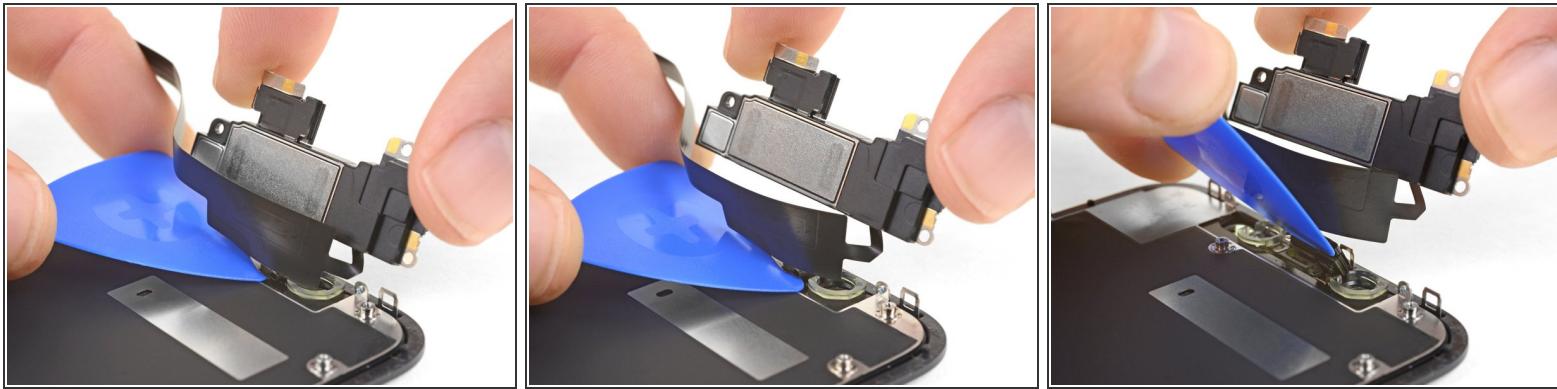

- Working left to right, slide an opening pick beneath the flex cable and underneath the proximity sensor + flood illuminator module.
  - Gently wiggle and lift to separate the module from its notch in the front panel.
- (i)* It's helpful to lift and hold the speaker out of the way for access. Just be careful not to pull on the thin flex cable while you work.

## Step 25 — Remove the ambient light sensor bracket

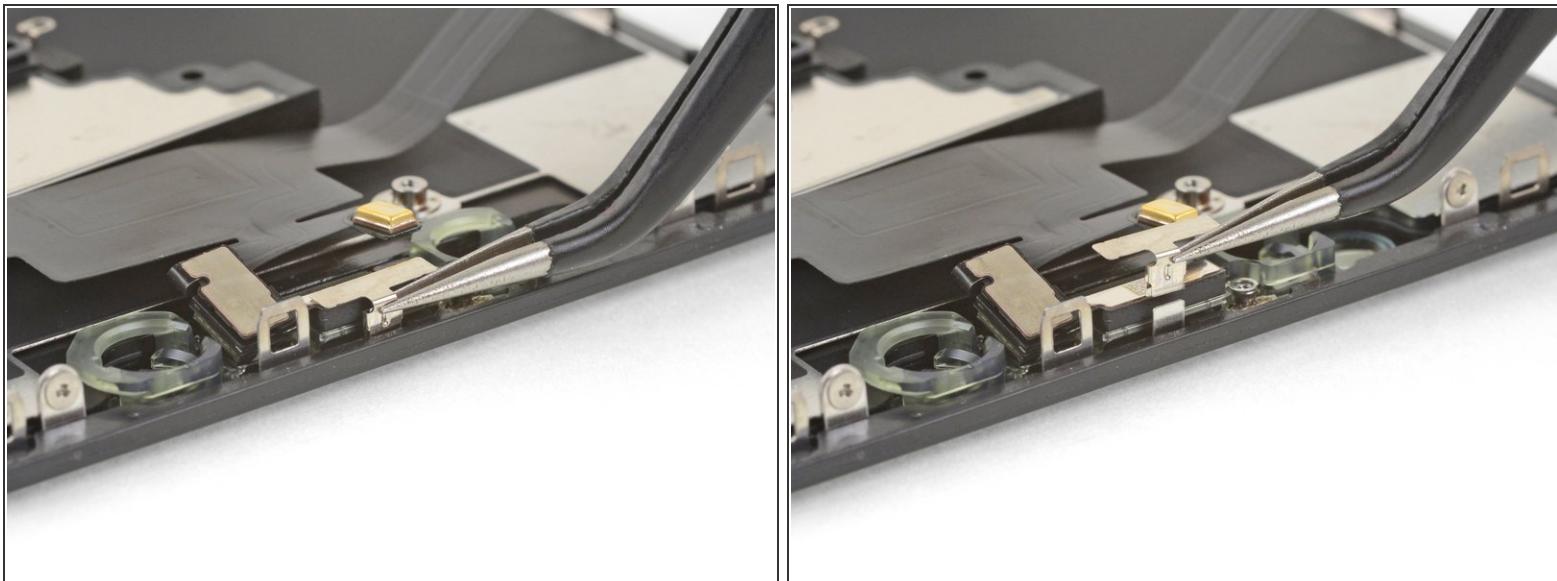

- Use tweezers to slide the small bracket straight up and off of the ambient light sensor.

## Step 26 — Lift the ambient light sensor




- Use tweezers to wiggle the ambient light sensor and lift it from its notch in the display.
  - *i* If the sensor does not wiggle free after a few seconds, apply more heat and try again.
- !** The sensor remains attached to the rest of the sensor assembly via a very thin flex cable. Be careful not to strain or damage the cable.

## Step 27



- If you successfully removed the entire ambient light sensor, as shown in the first photo, continue to the next step below.
  - If the white diffuser strip is detached and remains embedded in the display, as shown in the second photo, you will need to carefully lever it out along the top edge using a thin blade or pry tool. Re-applying heat first may make this task a bit easier.
- ☞ During reassembly, install the diffuser into the display first, making sure it faces the right direction (the front-facing side is shown in the first image, and the rear-facing side is shown in the third).
- ☞ Then, set the ambient light sensor on top of the diffuser. You will need to hold the sensor in position while installing the screws securing the earpiece/sensor assembly. Once the screws are tightened, the sensor will stay in place and work normally.

## Step 28 — Remove the speaker + front sensors

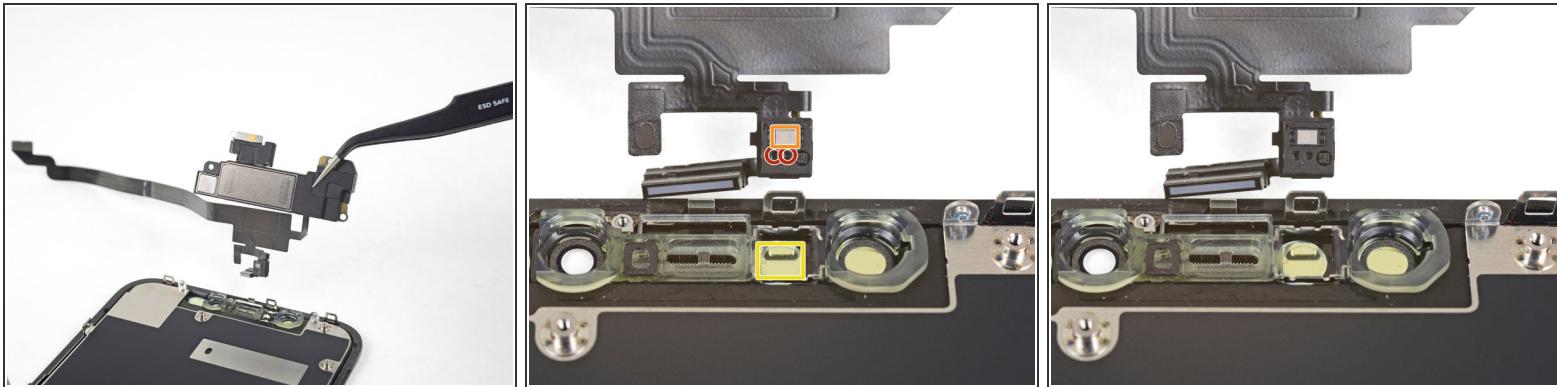

- Remove the earpiece speaker and front sensor assembly.
- ☒ During reassembly, check the position of the black plastic module containing these components:
  - Proximity sensor
  - Flood illuminator
- The module must be positioned so that these components are not obstructed by any adhesive.

Compare your new replacement part to the original part—you may need to transfer remaining components or remove adhesive backings from the new part before installing.

**To reassemble your device, follow the above steps in reverse order.**

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Check out our [Answers community](#) for troubleshooting help.