




iRobot Roomba 655 Pet Series Front Bumper Replacement

How to remove the front bumper on your Roomba.

Written By: Rhett

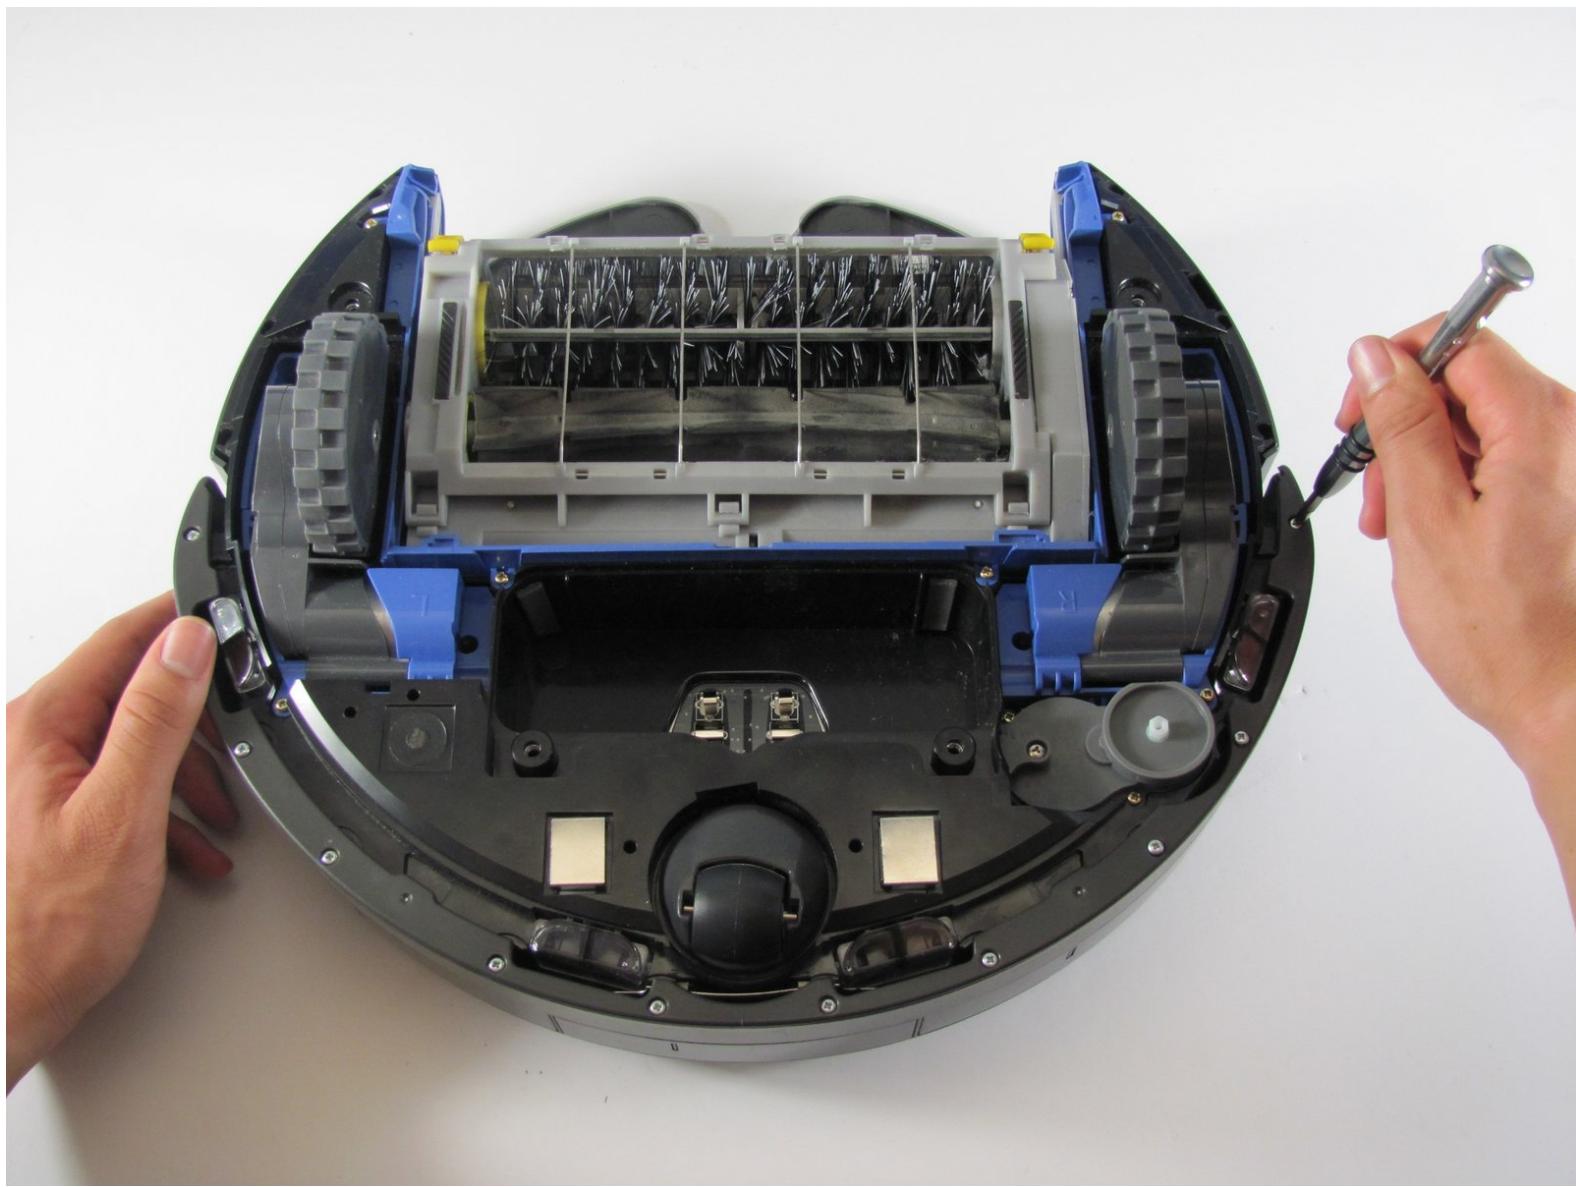


INTRODUCTION

You will be removing the front bumper (this runs into objects and walls) from the Roomba to gain access to the control center (display) and motherboard.

TOOLS:

- Phillips #1 Screwdriver (1)

Step 1 — Front Bumper

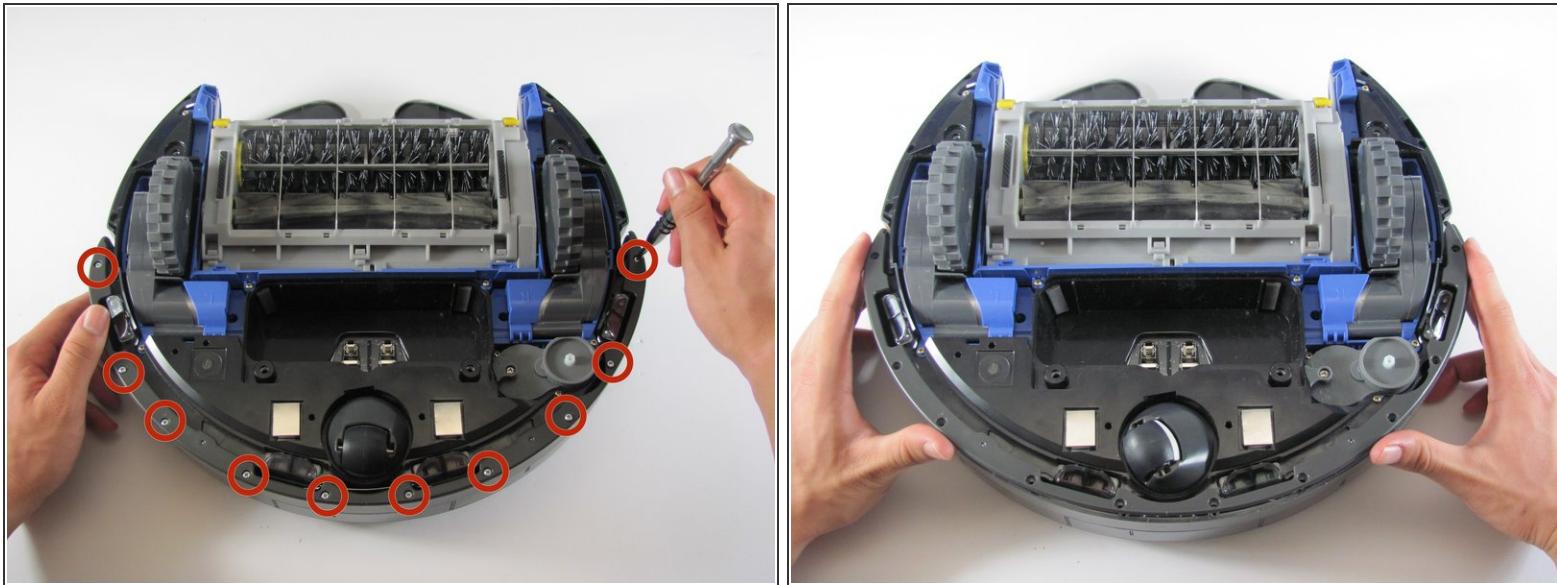

- Remove the ten 11mm screws that hold the front bumper to the plastic bumper protector with your Phillips #1 screwdriver.
- Pull the plastic bumper protector up and off of the bumper.

Step 2



- Flip the Roomba back over, so you are viewing the top.
- Pull up on the front bumper to remove it.

⚠ Be careful not to pull too hard because there is wiring attached to the bumper.

- Remove the two 7mm screws with your Phillips #1 screwdriver, holding the wire sensors in place to the front bumper.

This document was generated on 2019-09-24 03:16:55 PM (MST).

To reassemble your device, follow these instructions in reverse order.