



# why! W670SZQ1 Replacing the LCD screen

Written By: Felice Suglia





## PARTS:


- [New Item \(1\)](#)
- [New Item \(1\)](#)

## Step 1 — The Batteries



- Unlock the lock latch on the left.
- Unlock the lock latch on the right.
- Remove the battery while holding the lock latch unlocked.

## Step 2 — LCD screen

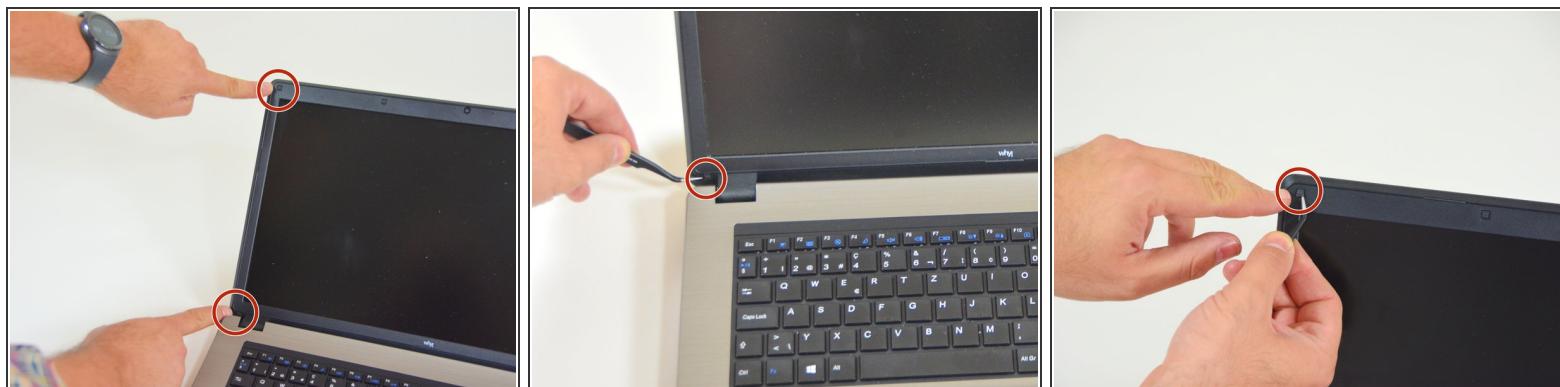


- Start by locating the two screw caps on the left side of the screen.
- Remove the lower screw cover.
- Then the top screw cover.

## Step 3



- Locate and then remove the first center screw on the top of the screen frame.
- Then the second central cap on the top of the screen frame.
- Then locate and remove the screw cap on the upper right side of the screen frame.

## Step 4

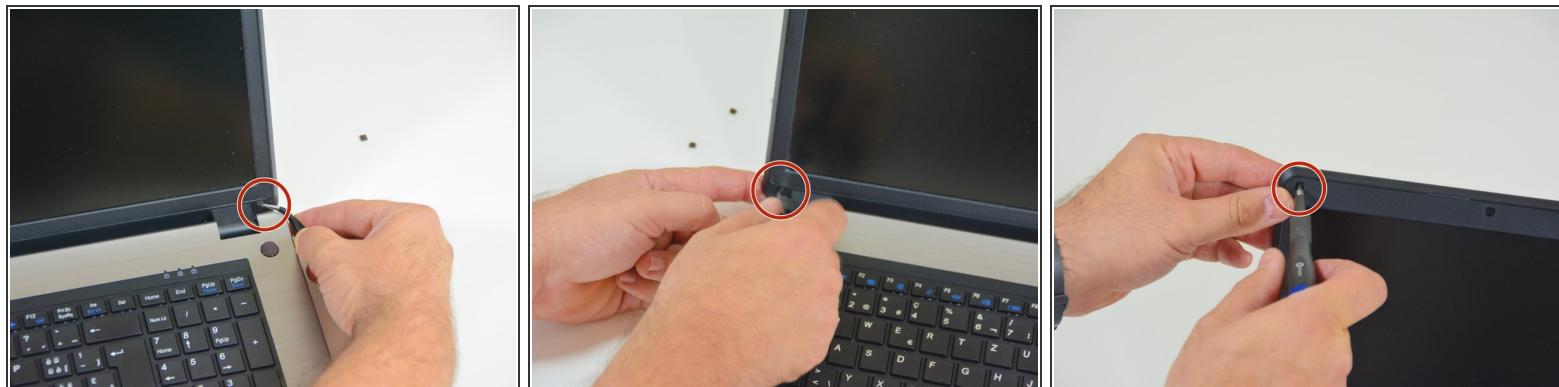


- Then finally the bottom right screw cap of the screen frame.
- Then unscrew the screws behind the screw caps, starting with the one at the bottom left of the frame.
- Then at the top left.

## Step 5



- Then the first central screw on the top edge of the frame.
- Then the second central screw on the top edge of the frame.
- Then the one in the upper right corner of the frame.

## Step 6

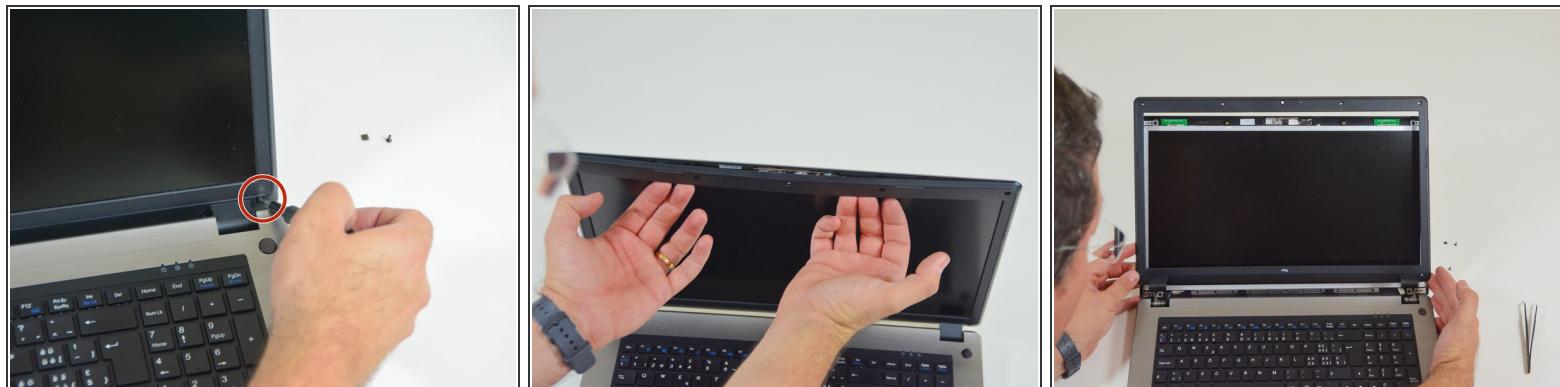

- And finally the one on the lower right side of the frame.
- Then gently use your nails.
- To remove the frame from the LCD screen.

## Step 7




- Unscrew the screws on the front of the LCD screen.
- Next, unscrew the screws on the right side of the LCD screen, starting with the first one.
- Then the second.

## Step 8




- Then the third.
- And finally the fourth.
- Repeat these operations then on the left side of the screen starting with the first screw.

## Step 9

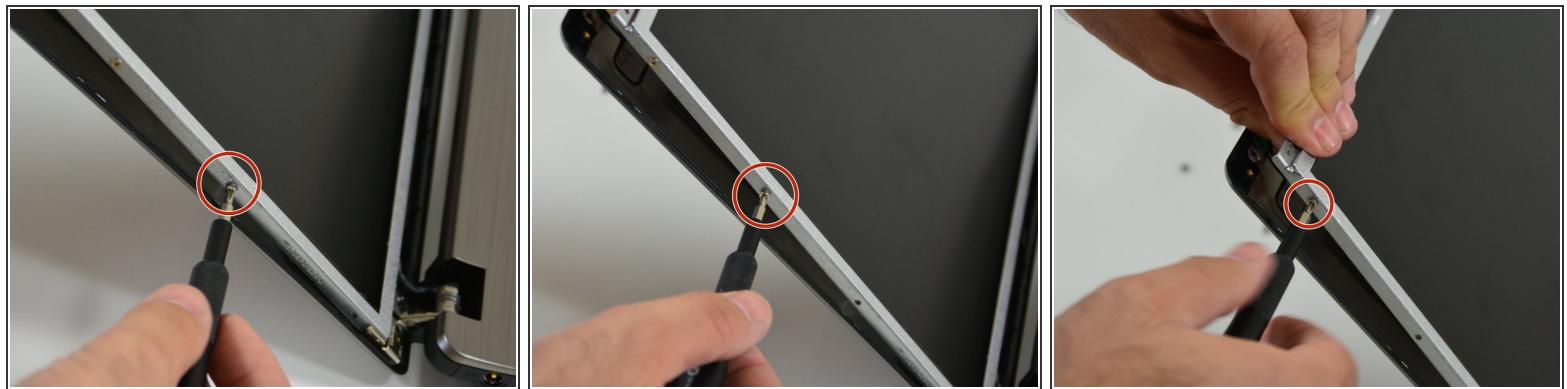

- Then the second.
- Then the third. .
- And finally the fourth

## Step 10

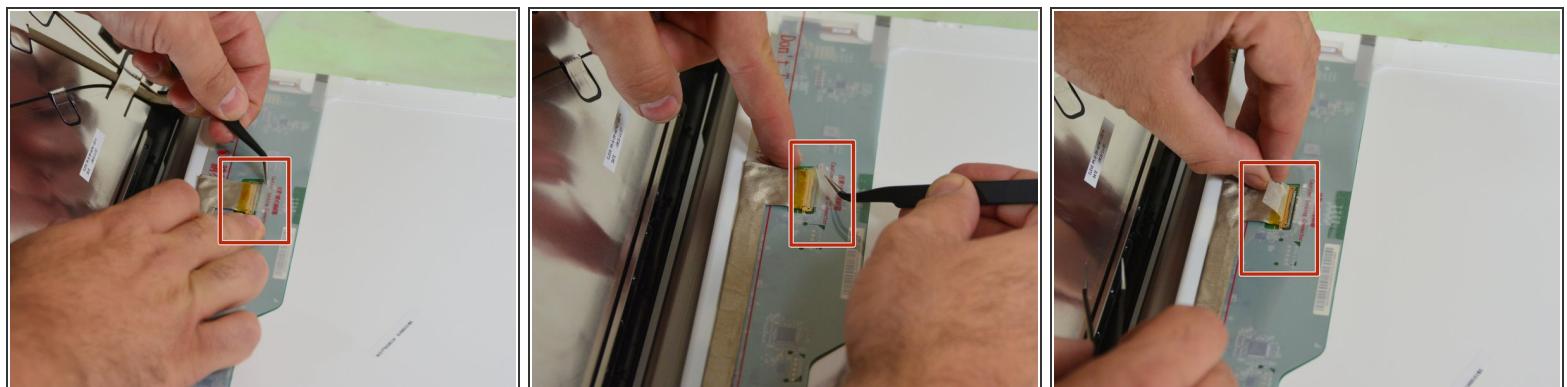

- Then flip the LCD screen.
- Then appears the connector to which is attached the connection cable of the LCD.
- Then peel off the tape covering the connector.

## Step 11



- then remove the cable from its connector.
- Once the cable is disconnected you can release the LCD screen.

to reassemble your device follow these instructions in reverse order.