



Hitachi Virtual Storage Platform G1000

Hardware Guide

© 2014-2015 Hitachi, Ltd. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or stored in a database or retrieval system for any purpose without the express written permission of Hitachi, Ltd.

Hitachi, Ltd., reserves the right to make changes to this document at any time without notice and assumes no responsibility for its use. This document contains the most current information available at the time of publication. When new or revised information becomes available, this entire document will be updated and distributed to all registered users.

Some of the features described in this document might not be currently available. Refer to the most recent product announcement for information about feature and product availability, or contact Hitachi Data Systems Corporation at https://support.hds.com/en_us/contact-us.html.

Notice: Hitachi, Ltd., products and services can be ordered only under the terms and conditions of the applicable Hitachi Data Systems Corporation agreements. The use of Hitachi, Ltd., products is governed by the terms of your agreements with Hitachi Data Systems Corporation.

By using this software, you agree that you are responsible for:

1. Acquiring the relevant consents as may be required under local privacy laws or otherwise from employees and other individuals to access relevant data; and
2. Verifying that data continues to be held, retrieved, deleted, or otherwise processed in accordance with relevant laws.

Hitachi is a registered trademark of Hitachi, Ltd., in the United States and other countries. Hitachi Data Systems is a registered trademark and service mark of Hitachi, Ltd., in the United States and other countries.

Archivas, Essential NAS Platform, HiCommand, Hi-Track, ShadowImage, Tagmaserve, Tagmasoft, Tagmasolve, Tagmastore, TrueCopy, Universal Star Network, and Universal Storage Platform are registered trademarks of Hitachi Data Systems.

AIX, AS/400, DB2, Domino, DS6000, DS8000, Enterprise Storage Server, ESCON, FICON, FlashCopy, IBM, Lotus, MVS, OS/390, RS/6000, S/390, System z9, System z10, Tivoli, VM/ESA, z/OS, z9, z10, zSeries, z/VM, and z/VSE are registered trademarks or trademarks of International Business Machines Corporation.

All other trademarks, service marks, and company names in this document or web site are properties of their respective owners.

Microsoft product screen shots are reprinted with permission from Microsoft Corporation.

Notice on Export Controls. The technical data and technology inherent in this Document may be subject to U.S. export control laws, including the U.S. Export Administration Act and its associated regulations, and may be subject to export or import regulations in other countries. Reader agrees to comply strictly with all such regulations and acknowledges that Reader has the responsibility to obtain licenses to export, re-export, or import the Document and any Compliant Products.



Contents

Preface.....	7
Safety and environmental information.....	8
Intended audience.....	8
Product version.....	8
Release notes.....	8
Changes in this revision.....	8
Related documents.....	9
Document conventions.....	9
Conventions for storage capacity values.....	10
Accessing product documentation.....	11
Getting help.....	11
Comments.....	11
1 Introduction.....	13
System overview.....	14
Features.....	14
High performance.....	15
Scalability.....	15
Flexible connectivity.....	17
High reliability.....	17
High flexibility.....	17
Nondisruptive service and upgrades.....	18
High temperature mode	19
Economical and quiet.....	21
Hardware overview.....	21
Controller chassis.....	24
Controller components.....	25
Front-end director.....	29
Supported connections and protocols.....	30
Flexible front-end director installation.....	32
Supported speeds and cable lengths.....	34
Drive chassis.....	35
Cache memory.....	39

Memory operation.....	40
Data protection.....	40
Cache capacity.....	40
Shared memory.....	41
Cache flash memory.....	43
CFM operation.....	44
Cache flash memory capacity.....	44
2 Hardware architecture.....	47
System architecture overview.....	48
Hardware architecture.....	48
VSP G1000 RAID implementation.....	49
Array groups and RAID levels.....	49
RAID1.....	50
RAID5.....	51
RAID6.....	54
LDEV striping across array groups.....	55
CU images, LVIs, and logical units.....	57
CU images.....	57
Logical volume images.....	58
Logical units.....	58
Mainframe operations.....	58
Mainframe compatibility and functionality.....	58
Mainframe operating system support.....	59
Mainframe configuration.....	59
Systems operations.....	60
Compatibility and functionality.....	60
Systems host platform support.....	60
System configuration.....	60
Host modes and host mode options.....	61
Device Manager - Storage Navigator.....	62
3 Safety requirements.....	65
General safety guidelines.....	66
Work safety guidelines.....	66
Warning about moving parts.....	67
Electrical safety guidelines.....	67
4 Site preparation.....	69
Safety requirements.....	70
Responsibilities.....	70
User responsibilities.....	70
Hitachi Data Systems responsibilities.....	70
Site preparation checklist.....	71
General site requirements.....	73
Equipment clearances.....	73
Equipment weight.....	74
System storage requirements.....	74
Data center requirements.....	74

Operational requirements.....	75
System specifications and requirements.....	76
Mechanical specifications.....	76
Electrical specifications.....	77
Grounding.....	78
Power connection.....	78
Environmental specifications.....	79
Component weight, heat, airflow, and power consumption.....	80
Airflow.....	84
Equipment noise.....	84
Power connection diagrams.....	84
UPS power connection.....	87
Data connection diagrams.....	88
Long cable connections.....	92
Port configurations.....	96
Service clearance, floor cutout, and floor load rating.....	97
Single-rack configuration.....	98
Two-rack, single-controller configuration.....	100
Two-rack, dual-controller configuration.....	102
Three-rack, single-controller configuration.....	104
Three-rack, dual-controller configuration.....	106
Four-rack configuration - two controllers (center).....	108
Four-rack configuration - two controllers (left).....	110
Five-rack configuration.....	112
Six-rack configuration.....	114
Seven-rack configuration.....	116
5 Power on/off procedures.....	119
Safety and environmental information.....	120
Power control panel.....	120
System idle mode.....	122
Normal power on/off procedures.....	123
Power on procedures.....	123
Power off procedures.....	124
Emergency power off/on procedures.....	125
Emergency power off procedure.....	125
Power on procedure after emergency power off.....	125
Battery backup operations.....	125
Cache backup batteries.....	126
Battery life.....	127
Storing the system.....	128
6 Troubleshooting.....	129
Getting help.....	130
Solving problems.....	130
Service information messages.....	130
A Specifications.....	133
System specifications.....	134

Mechanical specifications.....	138
Electrical specifications.....	139
Environmental specifications.....	141
PDU specifications.....	142
B System option modes.....	143
System option modes.....	144
SOM details.....	179
Details for SOM 15.....	180
Details for SOM 122.....	180
Details for SOM 269.....	182
Details for SOM 467.....	182
Details for SOM 729.....	182
Details for SOM 784.....	182
Details for SOM 803.....	183
Details for SOM 855.....	183
Details for SOM 897, SOM 898, and SOM 901.....	183
Details for SOM 901.....	184
C Regulatory compliance.....	185
Regulatory compliance.....	186
US FCC Notice.....	188
Electronic emissions testing.....	188
European Declaration of Conformity.....	189
Notice of export controls.....	189
China RoHS.....	189
Hazardous and toxic substances.....	190
Disposal.....	190
Recycling.....	190
Electronic emissions certificates.....	190
Glossary.....	195
Index.....	197



Preface

This manual provides instructions and information to use the Hitachi Virtual Storage Platform G1000 storage system hardware.

Read this document carefully to understand how to use these products and keep a copy for your reference.

- ☐ [Safety and environmental information](#)
- ☐ [Intended audience](#)
- ☐ [Product version](#)
- ☐ [Release notes](#)
- ☐ [Changes in this revision](#)
- ☐ [Related documents](#)
- ☐ [Document conventions](#)
- ☐ [Conventions for storage capacity values](#)
- ☐ [Accessing product documentation](#)
- ☐ [Getting help](#)
- ☐ [Comments](#)

Safety and environmental information



Note: Before operating or working on the Hitachi Virtual Storage Platform G1000 storage system, read the safety and environmental information in [Safety requirements on page 65](#) and [Regulatory Compliance on page 185](#).

Intended audience

This document is intended for system administrators, Hitachi Data Systems representatives, and authorized service providers who install, configure, and operate Hitachi Virtual Storage Platform G1000 storage systems.

Readers of this document should be familiar with the following:

- Data processing and RAID storage systems and their basic functions.
- The Hitachi Virtual Storage Platform G1000 storage system and the *Hitachi Virtual Storage Platform G1000 Product Overview*.
- The Hitachi Device Manager - Storage Navigator software and the *Hitachi Command Suite User Guide*.
- The concepts and functionality of storage provisioning operations.

Product version

This document revision applies to VSP G1000 microcode 80-03-1x or later.

Release notes

Read the release notes before installing and using this product. They may contain requirements or restrictions that are not fully described in this document or updates or corrections to this document.

Changes in this revision

- In [Component weight, heat, airflow, and power consumption on page 80](#), added product information for new 1.6TB, 3.2TB and 6.4TB Hitachi Accelerated Flash DC2 flash module drives
- In [System specifications on page 134](#), updated *Drive specifications* table to include new guidelines for installing drives and operating flash module drives in high temperature mode

Related documents

The documents below are referenced in this document or contain more information about the features described in this document.

Hitachi Virtual Storage Platform G1000 documents:

- *Hitachi Virtual Storage Platform G1000 Product Overview*, MK-92RD8051
- *Hitachi Command Suite Installation and Configuration Guide*, MK-90HC173
- *Hitachi Virtual Storage Platform G1000 System Administrator Guide*, MK-92RD8016
- *Hitachi Virtual Storage Platform G1000 Provisioning Guide for Mainframe Systems*, MK-92RD8013
- *Hitachi Virtual Storage Platform G1000 Provisioning Guide for Open Systems*, MK-92RD8014
- *Hitachi Universal V2 Rack Reference Guide*, MK-94HM8035
- *Hitachi Command Suite User Guide*, MK-90HC172
- *Hitachi Virtual Storage Platform G1000 Performance Guide*, MK-92RD8012
- *Mainframe Host Attachment and Operations Guide* MK-96RD645
- *Open-Systems Host Attachment Guide*, MK-90RD7037
- *Hitachi SNMP Agent User Guide*, MK-92RD8015
- *Hitachi Volume Shredder User Guide*, MK-92RD8025

For a list of all documents for the Hitachi Virtual Storage Platform G1000 storage system, see the *Hitachi Virtual Storage Platform G1000 Product Overview*.





Document conventions

This document uses the following typographic conventions:

Convention	Description
Bold	Indicates text on a window, other than the window title, including menus, menu options, buttons, fields, and labels. Example: Click OK .
<i>Italic</i>	Indicates a variable, which is a placeholder for actual text provided by the user or system. Example: <i>copy source-file target-file</i> Note: Angled brackets (< >) are also used to indicate variables.
Monospace	Indicates text that is displayed on screen or entered by the user. Example: <code>pairdisplay -g oradb</code>
< > angled brackets	Indicates a variable, which is a placeholder for actual text provided by the user or system. Example: <code>pairdisplay -g <group></code> Note: Italic font is also used to indicate variables.
[] square brackets	Indicates optional values. Example: [a b] indicates that you can choose a, b, or nothing.

Convention	Description
{ } braces	Indicates required or expected values. Example: { a b } indicates that you must choose either a or b.
vertical bar	Indicates that you have a choice between two or more options or arguments. Examples: [a b] indicates that you can choose a, b, or nothing. { a b } indicates that you must choose either a or b.

This document uses the following icons to draw attention to information:

Icon	Label	Description
	Note	Calls attention to important or additional information.
	Tip	Provides helpful information, guidelines, or suggestions for performing tasks more effectively.
	Caution	Warns the user of adverse conditions or consequences (for example, disruptive operations).
	WARNING	Warns the user of severe conditions or consequences (for example, destructive operations).

Conventions for storage capacity values

Physical storage capacity values (for example, disk drive capacity) are calculated based on the following values:

Physical capacity unit	Value
1 kilobyte (KB)	1,000 (10 ³) bytes
1 megabyte (MB)	1,000 KB or 1,000 ² bytes
1 gigabyte (GB)	1,000 MB or 1,000 ³ bytes
1 terabyte (TB)	1,000 GB or 1,000 ⁴ bytes
1 petabyte (PB)	1,000 TB or 1,000 ⁵ bytes
1 exabyte (EB)	1,000 PB or 1,000 ⁶ bytes

Logical storage capacity values (for example, logical device capacity) are calculated based on the following values:

Logical capacity unit	Value
1 block	512 bytes

Logical capacity unit	Value
1 cylinder	Mainframe: 870 KB Open-systems: <ul style="list-style-type: none"> • OPEN-V: 960 KB • Others: 720 KB
1 KB	1,024 (2^{10}) bytes
1 MB	1,024 KB or $1,024^2$ bytes
1 GB	1,024 MB or $1,024^3$ bytes
1 TB	1,024 GB or $1,024^4$ bytes
1 PB	1,024 TB or $1,024^5$ bytes
1 EB	1,024 PB or $1,024^6$ bytes

Accessing product documentation

Product documentation is available on Hitachi Data Systems Support Connect: https://support.hds.com/en_us/documents.html. Check this site for the most current documentation, including important updates that may have been made after the release of the product.

Getting help

[Hitachi Data Systems Support Connect](https://support.hds.com/en_us/documents.html) is the destination for technical support of products and solutions sold by Hitachi Data Systems. To contact technical support, log on to Hitachi Data Systems Support Connect for contact information: https://support.hds.com/en_us/contact-us.html.

[Hitachi Data Systems Community](https://community.hds.com) is a global online community for HDS customers, partners, independent software vendors, employees, and prospects. It is the destination to get answers, discover insights, and make connections. **Join the conversation today!** Go to community.hds.com, register, and complete your profile.

Comments

Please send us your comments on this document to doc.comments@hds.com. Include the document title and number, including the revision level (for example, -07), and refer to specific sections and paragraphs whenever possible. All comments become the property of Hitachi Data Systems Corporation.

Thank you!

Introduction

This chapter briefly describes the hardware components used in the Hitachi Virtual Storage Platform G1000 storage system.

- [System overview](#)
- [Hardware overview](#)

System overview

The Hitachi Virtual Storage Platform G1000 storage system (VSP G1000) is a high-capacity, high performance unified block and file enterprise storage system that offers a wide range of storage and data services, software, logical partitioning, and simplified and unified data replication across heterogeneous storage systems.

Features

The VSP G1000 storage system includes several state-of-the art advances in hardware technology that improve reliability, serviceability and access to drives and other components when maintenance is needed. These include:

- Hitachi Accelerated Flash storage offers a patented data-center-class design and rack-optimized form factor that delivers more than 2 PB per system. It supports a sustained performance of 100,000 8K I/O per second, per device, with low and consistent response time
- The latest 2.5-inch and 3.5-inch 6 Gb/sec SAS drives support lower power consumption and higher density per rack with up to 2,304 drives in six 19-inch standard racks. See [Table 33 Drive specifications on page 136](#). For information about Hitachi racks, refer to the *Hitachi Universal V2 Rack Reference Guide*, MK-94HM8035.
- Hitachi NAS Platform hardware accelerated network protocols support up to 2 GB/sec throughput for sequential workloads and up to 1.2 million NFS operations per second.
- Efficient caching makes up to 2 TB global cache dynamically accessible by all connected hosts and Hitachi NAS Platform nodes.
- The HNAS file module provides primary data deduplication using hardware-based SHA-256 calculation engines. This module enables up to 90% capacity savings while maintaining high performance.
- In a two-controller system, the two controller racks can be placed up to 100 meters apart. In addition, the drive racks attached to a controller rack may be placed up to 100 meters from the controller rack. This enables maximum flexibility to optimize data center space usage and provides ease of access for operation and maintenance. See the detailed description of this feature and the cable diagrams in [Long cable connections on page 92](#).
- High-speed 8-core CPUs in the virtual storage directors, expanded cache memory (up to 2 TB per 2-controller system), flexible installation, and increased drive types and capacities.
- Nondisruptive migration is available as a service from Hitachi Data Systems authorized services representatives as well as through the purchase of an optional software license for implementation by the customer. Because good planning is essential to smooth migration, we strongly recommend the nondisruptive migration planning service offered

by Hitachi Data Systems Global Solution Services (GSS). See

[Nondisruptive service and upgrades on page 18](#)

- high temperature mode is a licensed feature that allows the storage system to be run at either standard temperature (60.8°F to 89.6°F / 16°C to 32°C) or at higher temperatures (60.8°F to 104°F / 16°C to 40°C) in a data center, saving energy and cooling costs. See [high temperature mode on page 19](#).

High performance

The VSP G1000 offers the highest performance of the enterprise-class systems offered by Hitachi, up to three times the performance of the previous generation Virtual Storage Platform. It offers high performance that enables consolidation and real-time applications, a wide range of storage and data services, software, logical partitioning, along with simplified and unified data replication across heterogeneous storage systems. Its large-scale, enterprise class virtualization layer, combined with Hitachi Dynamic Tiering and thin provisioning software, allows you to consolidate internal and external storage into one pool.

The VSP G1000 includes several features that improve system performance:

- Integrated data and storage management using Hitachi Command Suite and Device Manager - Storage Navigator. These provide integrated management across all Hitachi storage systems and data types.
- Disk drives operating at 7,200, 10,000, or 15,000 RPM
- Solid state drives with super high speed response.
- Hitachi Accelerated Flash module drives with ultra high speed response
- High-speed data transfer between the back-end directors and the drives at a rate of 6 GB/sec using the SAS interface
- Scalable and upgradable system performance, described in the following section.

Scalability

The VSP G1000 storage system offers an entirely new type of scalable and adaptable integrated active-active architecture that supports integrated management. Hitachi Data Systems storage systems can be configured in numerous ways as needed to meet performance and storage requirements.

Scalable system performance

System performance can be optimized according to the user's needs, and can be easily upgraded (in small or large increments) as storage needs increase. The following table shows the supported configurations.

Table 1 System performance configurations

Number of controllers	Number of VSD pairs / CPU cores ¹	Cache size ²
1	min= 1 (16 cores) max=4 (64 cores)	min = 64 GB ³ max=1 TB
2	min= 2 (32 cores) max=8 (128 cores)	min = 64 GB per system (32 GB per controller) ³ max=2 TB
Notes: 1. A VSD pair consists of two VSD blades. Each VSD contains one 8-core processor. See Table 4 Supported minimum VSP G1000 configuration options on page 23 for details. 2. Cache memory modules can be either 16 GB or 32 GB, but only one memory module size can be used in a system. 3. HDS minimum cache per system is 64 GB whether the system contains one controller or two.		

Scalable storage capacity

- The minimum configuration is a single rack with one controller chassis in a diskless configuration.
- A small VSP G1000 system can be a single rack with one controller chassis and one or two drive chassis or flash drive chassis.
- A mid-sized VSP G1000 system can be three racks with one controller chassis and a maximum of eight combined LFF or SFF drive chassis and up to two FMD chassis.
- For block systems, the maximum configuration is a six-rack twin version of the mid-sized system with two controller chassis and twelve 16U LFF/SFF drive chassis, and (depending on how many SFF or LFF chassis are installed) up to two 8U FMD chassis.
- For combined block and file storage systems, the maximum configuration varies, depending on how many HNAS servers and switches are installed. Consult your authorized representative for examples of available configurations.
- **Maximum storage capacity:** The VSP G1000 can control up to 65,280 logical volumes. It can also control up to 2,304 SFF disk drives with a maximum physical disk capacity of approximately of 3.9 PB per storage system, or up to 1,152 LFF disk drives with a maximum physical disk capacity of approximately 6.8 PB per storage system. In a drive intermix configuration, it can control up to 576 flash module drives with a maximum physical capacity of 2.0 PB per storage system.

Flexible connectivity

OS support

The VSP G1000 storage system supports most major IBM® mainframe operating systems and open operating systems, including Microsoft Windows®, Oracle Solaris®, IBM AIX®, UNIX®, Linux®, HP-UX™, OpenVMS™, and VMware®. For more information on supported operating systems, see <http://www.hds.com/products/interoperability/index.html>.

Host connectivity

VSP G1000 supports mainframe (Fibre Channel (FICON)), open (Fibre Channel) host interfaces, or a combination of the two.

High reliability

The VSP G1000 storage system includes the following features that enhance reliability:

- **Multiple RAID configurations:** The system supports RAID6 (6D+2P and 14D+2P), RAID5 (3D+1P and 7D+1P), and RAID1 (2D+2D and 4D+4D).
- **Duplicate hardware:** The main modules in the controller chassis and drive chassis are configured in redundant pairs so that if any module fails, the duplicate module takes over until the failed component is replaced. These include power supplies, VSD pairs, cache path controllers, front-end directors, back-end directors, and drives. During that time, the storage system continues normal operation with zero data loss.
- **Protection from power failures:** In the event of a partial power loss (one phase) the system operates normally on the other phase until full power is restored. In the event of a full power loss, the cache backup modules keep the cache alive for 32 minutes while the system copies the system configuration information and all data in the cache to a cache flash drive (SSD).

High flexibility

The VSP G1000 storage system is available in many configurations, from a small, one rack, diskless system, to a large, six-rack system that includes two controller chassis, up to 2,304 SFF drives, up to 1,152 LFF drives, up to 384 SSD drives, up to 576 flash module drives, and a total of 2 TB cache, according to your storage needs. It can be easily reconfigured as storage needs change.

The system supports both block-only and unified (block and file) configurations in open and mainframe environments. The unified systems contain Hitachi Network Attached Storage servers and switches in addition to the block controller and storage drives.

Typical system configurations

The VSP G1000 system can be configured to meet a variety of storage needs. Typical configurations based on customer use-cases are described here.

- **Tiered storage:** A VSP G1000 system that is configured for tiered storage would include multiple drive types, including: high performance flash modules to fast data access, medium performance and capacity for most storage needs, and maximum capacity for data warehousing, all in one system. A tiered storage system could be configured with FMD (flash module) drives, SSD (solid state disk) drives, SAS drives (either SFF or LFF) and High capacity LFF drives. Software applications such as Dynamic Tiering allocate data to the appropriate drives based on frequency of access.
- **Maximum performance:** A VSP G1000 that delivers maximum performance could be configured with only flash module drives as shown in [Figure 9 FMD drive tray on page 38](#). This two-controller system would contain 12 FMD chassis with a total of 576 6.4TB flash module drives. This system could be typical for an on-line retail site where customers expect fast access to multiple images, or a hospital medical imaging system, where physicians need immediate access to 3D CAT or MRI images.
- **Maximum storage capacity:** The VSP G1000 is configured with only 6 TB LFF disk drives, as shown in [Figure 7 LFF 2U drive tray diagram and front view on page 36](#). This system would contain 12 LFF chassis with a total of 1152 6TB 7.2k LFF drives. A typical use for this system could be a data warehouse for medical or insurance records, where high speed access is not a high priority.

Software applications

The VSP G1000 storage system provides the foundation for matching application requirements to different classes of storage and delivering critical services, including:

- Business continuity services
- Content management services (search, indexing)
- Thin provisioning
- Dynamic Tiering
- High availability
- Security services
- I/O load balancing
- Data classification
- File management services

Nondisruptive service and upgrades

The VSP G1000 storage system is designed so that service and upgrades can be performed without interrupting normal operations.

- Main components can be “hot swapped” (added, removed, or replaced without disruption) during normal operation. These include every module in the controller chassis and the drive chassis, such as power supplies, virtual storage directors, front-end directors, and back-end directors, cache and cache backup modules, SVPs, and drives.
- A service processor (SVP) mounted in the controller chassis monitors the running condition of the storage system. Connecting the SVP with a service center allows authorized service personnel to maintain the system remotely.
- Online non-disruptive upgrade of the storage system microcode (firmware) can be performed without shutting down or rebooting the storage system during normal operation. The firmware is stored in shared memory (part of the cache memory module) and transferred in a batch, reducing the number of transfers from the SVP to the controller chassis over the LAN. Replacing the firmware online is fast because the storage system uses two or more processors at the same time.
- New optional Hitachi Command Suite Migration Enablement Service (includes pilot migration) is available to jump-start self-service migration. For complex, large-scale, heterogeneous and remote replication data center environments, nondisruptive migration service from Hitachi Global Solution Services (GSS) is required. Contact your HDS authorized sales or service representative for more information.

High temperature mode

High temperature mode is a licensed feature that allows the storage system to be run at either standard temperature (60.8°F to 89.6°F / 16°C to 32°C) or at higher temperatures (60.8°F to 104°F / 16°C to 40°C) in a data center, saving energy and cooling costs. Temperature sensors at the air inlets in the primary microprocessor blades measure the ambient air temperature.

High temperature mode window

High temperature mode is set via the **Edit High Temperature Mode** window in the Device Manager - Storage Navigator GUI. The window also displays alerts when the ambient air temperature exceeds the preset limits.

- In standard temperature mode, a temperature alert (SIM) displays when the temperature in the storage system exceeds 89.6°F / 32°C.
- In high temperature mode, the temperature alert (SIM) displays when the temperature in the storage system exceeds 104°F / 40°C.

System life

The lifetime of the system is five years when operating in the standard temperature mode. This lifetime is reduced when operating the system in high temperature mode, even if you revert the system to standard temperature mode later. Once the high temperature mode is selected, the

lifetime of the system remains at five years, even if the system is set back to the standard temperature mode.

Cache Flash Memory battery life

When high temperature mode is enabled, the cache flash memory battery life will be reduced to two-thirds of the battery life that remains at the time when high temperature mode is enabled.

Example 1: A new cache flash memory battery has three years of usable life when operated in a standard temperature environment. If you enable high temperature mode when the battery is new, the battery life will be reduced to two years.

Example 2: The storage system is used for two years at normal temperature mode. The cache battery has one year of usable life remaining at that time. If you enable high temperature mode, the life of the battery will be reduced to eight months.

Cache Flash Memory battery date.

When high temperature mode is enabled, the battery replacement notice displays one year earlier than when high temperature mode is disabled.

After high temperature mode is enabled, the date of the battery replacement notice cannot be changed back to normal, even if high temperature mode is disabled. When high temperature mode is enabled, a confirmation message is displayed.



Caution: Important information about using high temperature mode.

See the *Hitachi Virtual Storage Platform G1000 System Administrator Guide* for additional information.


- **Notify Technical Support:** Before enabling high temperature mode, contact Hitachi Data Systems Support at https://support.hds.com/en_us/contact-us.html for updates or additional information besides the following notes.
- **Guidelines for operating with flash module drives in high temperature mode:**
 - Do not enable high temperature mode if the system contains flash module drives (FMD) from an earlier generation (prior to Hitachi Accelerated Flash DC2 FMDs). The early generation FMDs are not designed to operate in high temperature mode. Only enable high temperature mode with Hitachi Accelerated Flash DC2 FMDs.
 - Do not enable high temperature mode if the system contains a mixture of early and current generation FMDs.
- **Operating altitude:** Because thinner air will not provide sufficient cooling, do not enable high temperature mode if the system is located above 4920

ft / 1,500 m. A storage system can be operated up to 9842 ft / 3,000 m above sea level in standard temperature mode.

- **System noise:** When the storage system is used in a high temperature environment near 104°F / 40°C, the fans operate at high speed, increasing system noise. See [Table 39 VSP G1000 system noise levels on page 142](#) for detailed information.
-

Temperature measurement

Ambient air temperature is measured by a sensor in the cooling air inlet on each of the modules in the primary VSD pair on each controller.

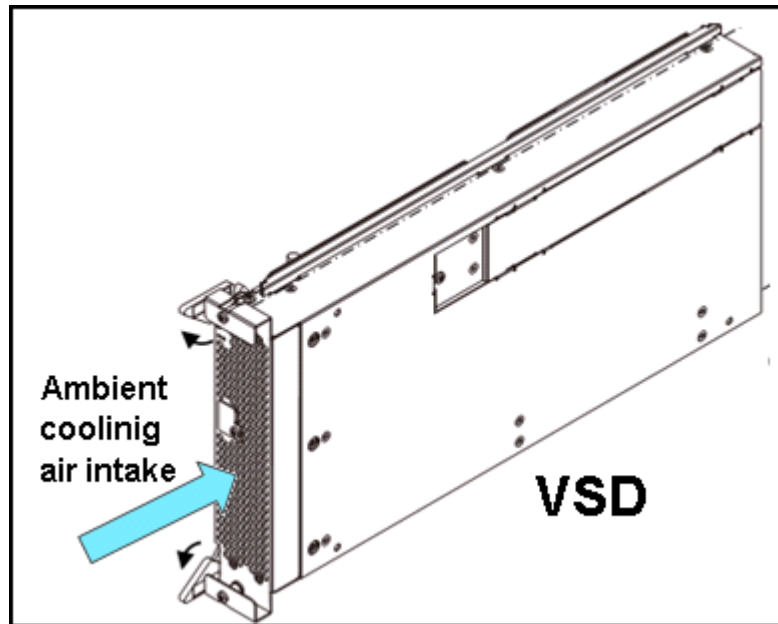

Economical and quiet

The speed of the fans in the controller and drive chassis are controlled by sensors in the units that measure the temperature of the exhaust air and set the fans to the speed necessary to maintain the unit temperature within a preset range. The speed of the fans in the controller and drive chassis are controlled by sensors in the units that measure the temperature of the exhaust air and set the fans to the speed necessary to maintain the unit temperature within a preset range. When the system is less busy, it generates less heat and fan speed is reduced, saving energy and reducing the noise level.

Hardware overview

The following section describes the VSP G1000 storage system components.

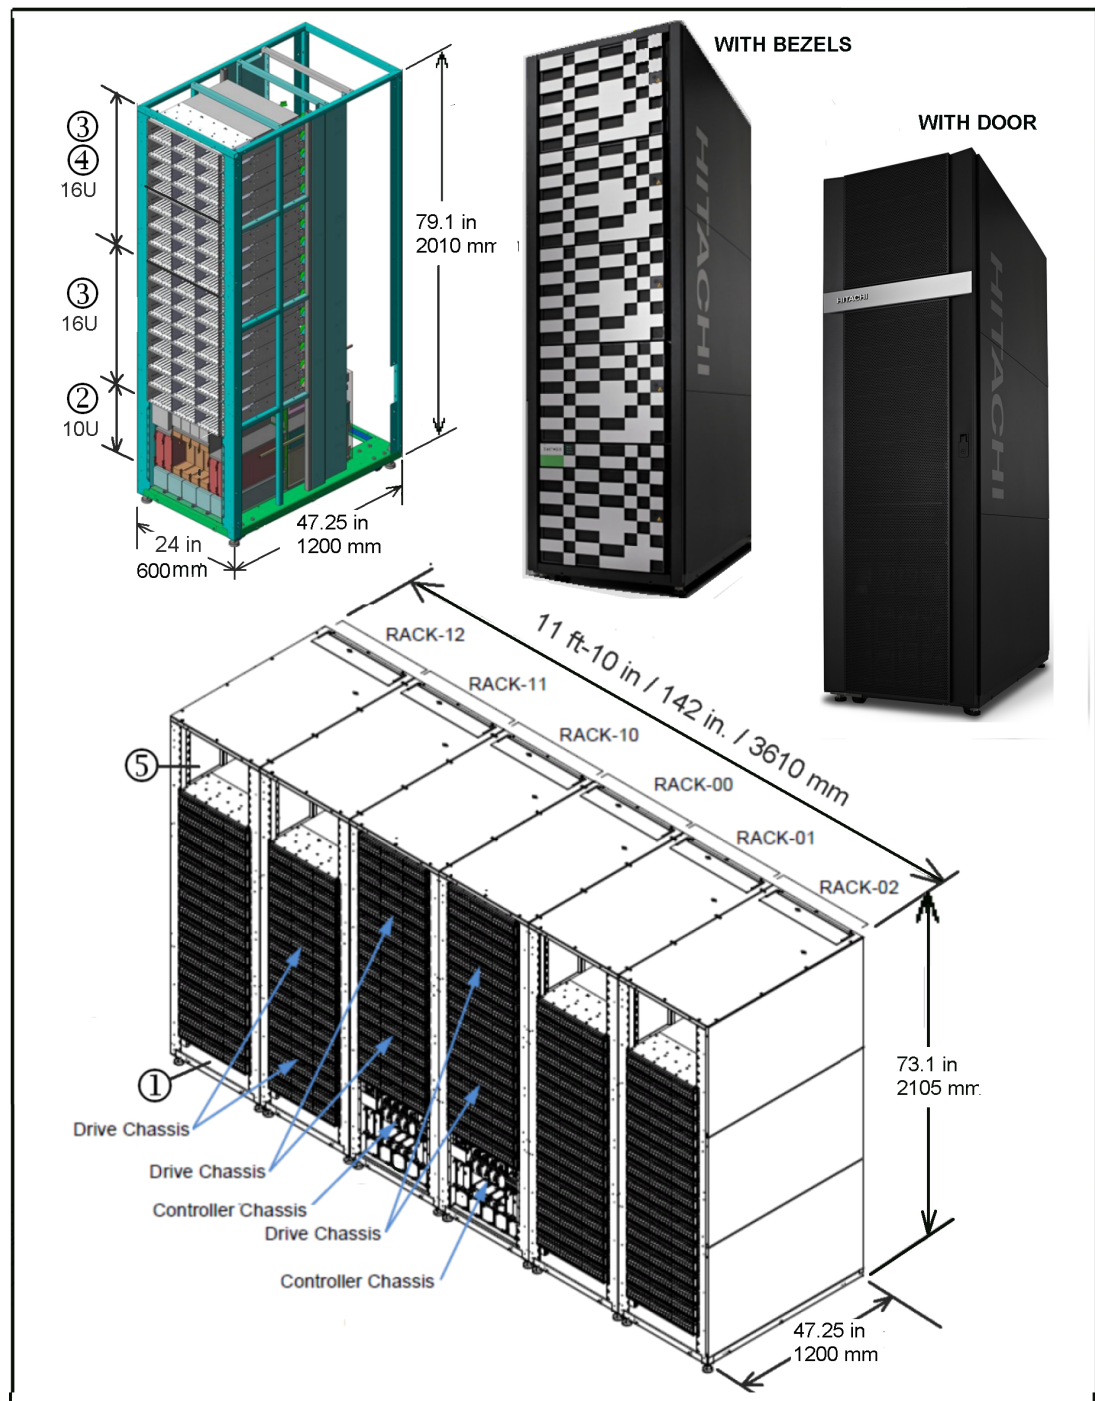


Figure 1 System overview

Table 2 VSP G1000 main components

Item	Description
1	2U space for cabling

Item	Description
2	10U controller chassis
3	16U SFF or LFF drive chassis
4	(optional) 1 or 2 8U FMD drive chassis
5	8U space

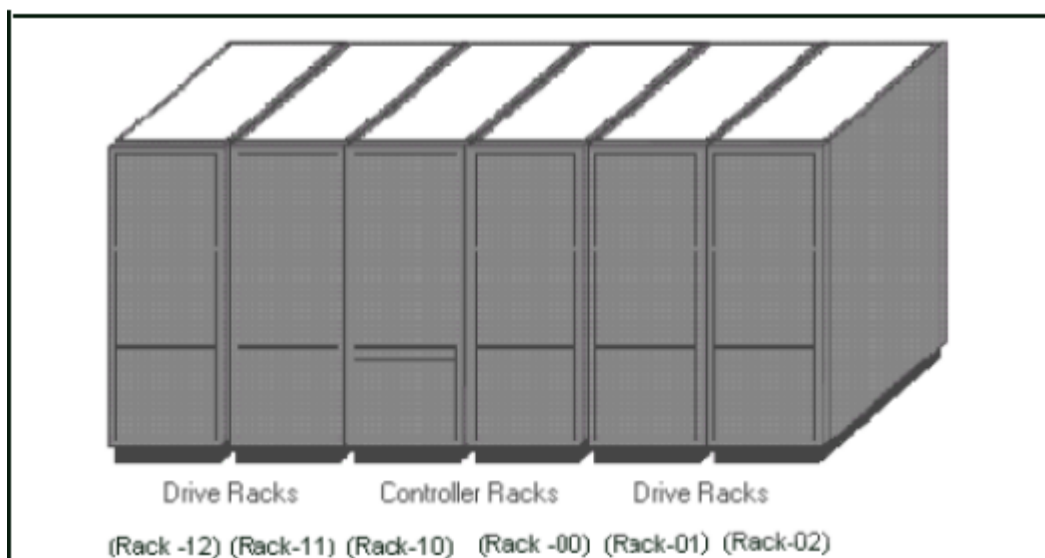


Figure 2 Rack numbers

Table 3 Supported VSP G1000 block module components

Chassis	Description	Maximum chassis / drives per system	
		One controller system	Two controller system
controller	10U x 1 controller	1	2
SFF	16U x 192 2.5- inch HDD drives	6 / 1,152	12 / 2,304
LFF	16U x 96 3.5-inch HDD drives	6 / 576	12 / 1152
FMD	4U x 48 FMD drives	6 / 288	12 / 576
SFF / LFF	SSD drives	192 max	384 max

Table 4 Supported minimum VSP G1000 configuration options

Number of VSD pairs	1	2 or 3	4	5	6 or 7	8
No. of controller chassis	1	1	1	2	2	2
Min cache memory (GB)	64	64	64	64	128	128
Cache Backup kit	1	1	1	1	2	2

Number of VSD pairs	1	2 or 3	4	5	6 or 7	8
front-end directors	1	1	1	1	1	1
back-end directors	0	0	0	0	0	0
Number of racks	1	1	1	2	2	2
Drive chassis(SFF/LFF/FMD)	Optional	Optional	Optional	Optional	Optional	Optional

Controller chassis


The controller provides system logic and control, memory, and monitoring, as well as the interfaces and connections to drives and host servers.

The 10U high VSP G1000 controller chassis consists of virtual storage directors (microprocessors), cache path control adapters, cache backup module kits, front-end directors (host I/O modules), service processors (SVP), ten cooling fans, and up to four power supplies. In a system with drives, the controller also contains at least two back-end director pair. All components are installed in redundant pairs so that if any component fails, the mirror component will handle the load and the system will continue to run. Any component, including the microcode (firmware) running on the SVP, can be replaced or upgraded while the system is in operation.

Clusters

The controller is logically divided in the center. Each side of the controller is a cluster that works in parallel with the other cluster. The virtual storage directors, front-end directors and back-end directors, cache, and cache backup kits, are installed symmetrically across the two clusters and work as one system.

The following illustration shows the clusters in front and rear views of a fully-configured controller chassis.

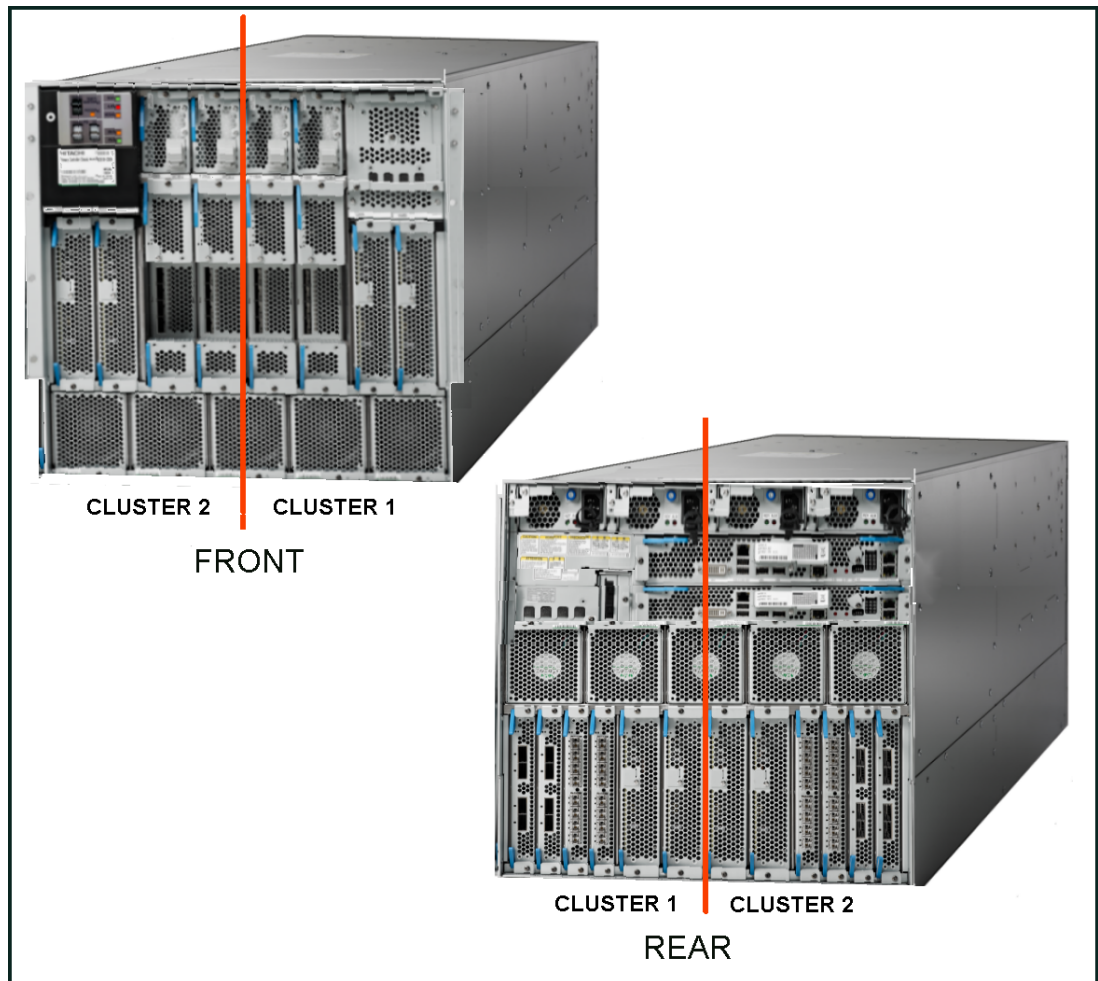

Controller components

The following illustrations show the front and rear views of a controller chassis. The tables following each illustration describe the components.

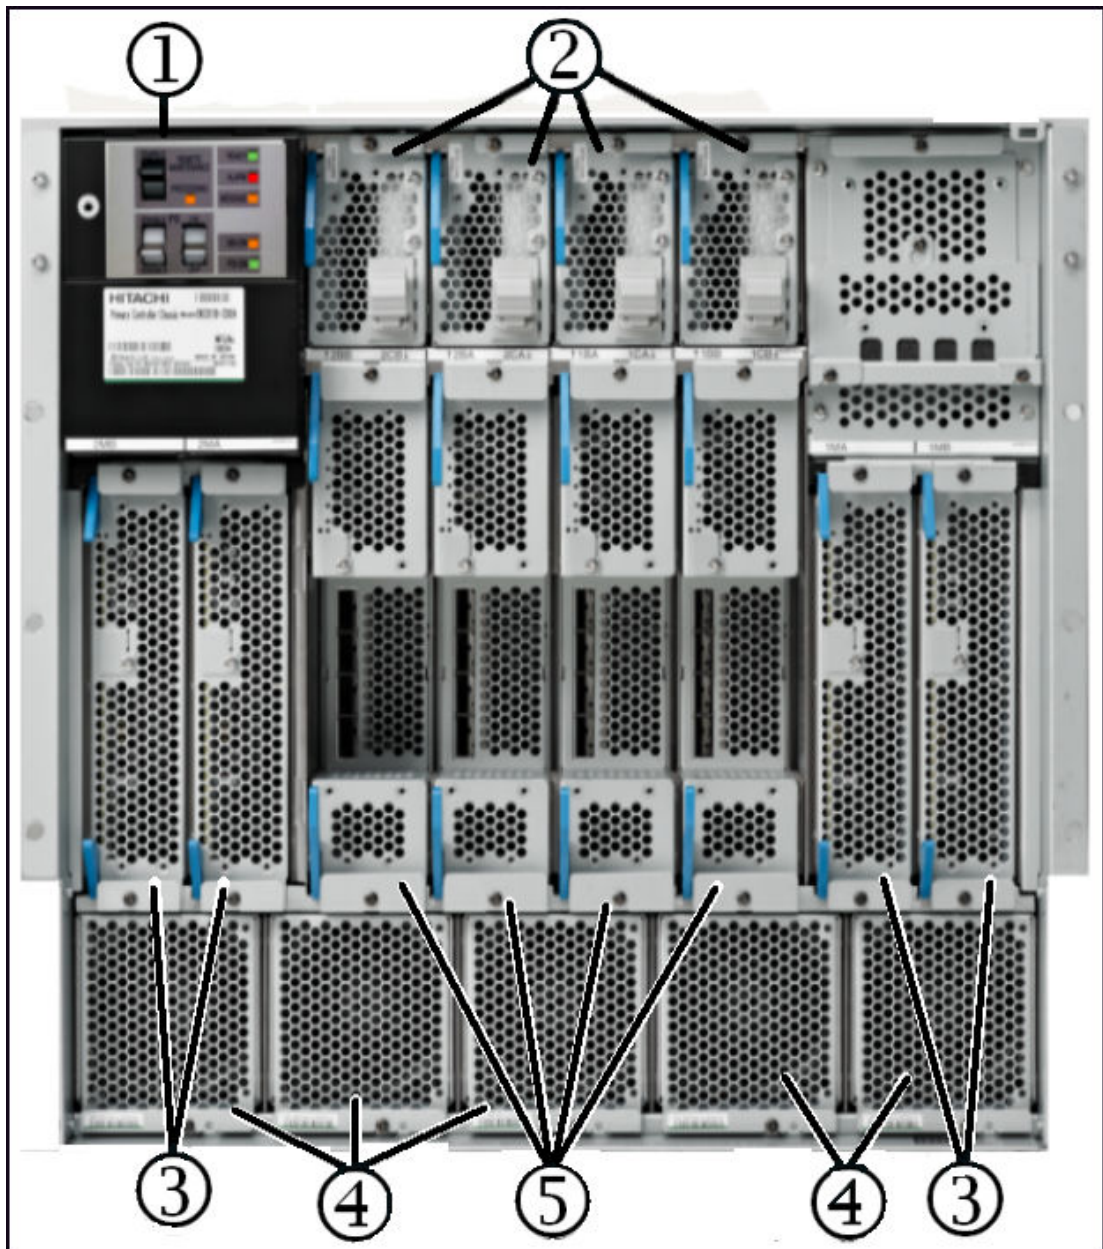


Figure 3 Controller, front view

Table 5 Controller components - front

Item	Name	Min	Max	Description
1	Control Panel	1	1	See Power control panel on page 120 .
2	Cache Backup Module (BKM)	2	4	Backup memory modules are installed in pairs, called a backup memory kits. Each module contains two batteries and either a 128 GB SSD flash drive (small kit) or a 256 GB SSD flash drive (large kit).

Item	Name	Min	Max	Description
				If the power fails, the cache is protected from data loss by the backup batteries and the cache flash memory (SSD). The batteries keep the cache alive for up to 32 minutes while the data is copied to the SSD.
3	Virtual Storage Director (MP blade)	2 (1 pair)	8 (4 pairs)	A VSD (MP blade) contains an Intel Xeon 2.1GHz 8-core microprocessor. VSDs must be installed in pairs. VSDs control the front-end directors, back-end directors, PCI-Express interface, and the local memory, and communication to the SVP. The VSDs are independent of the front-end directors and back-end directors, and can be shared across them.
4	Cooling fan (intake)	5	5	The five intake fans on the front of the controller pull air into the controller and distribute it across the controller components.
5	Cache Path Control Adapter (CPA)	1	4	The CPA uses the built in switch to connect the front-end directors, back-end directors, and the cache backup memory to the VSDs. It distributes data (data routing function), and sends hot-line signals to the VSD. The shared memory is located on the first CPA cache board in each cluster in the primary controller

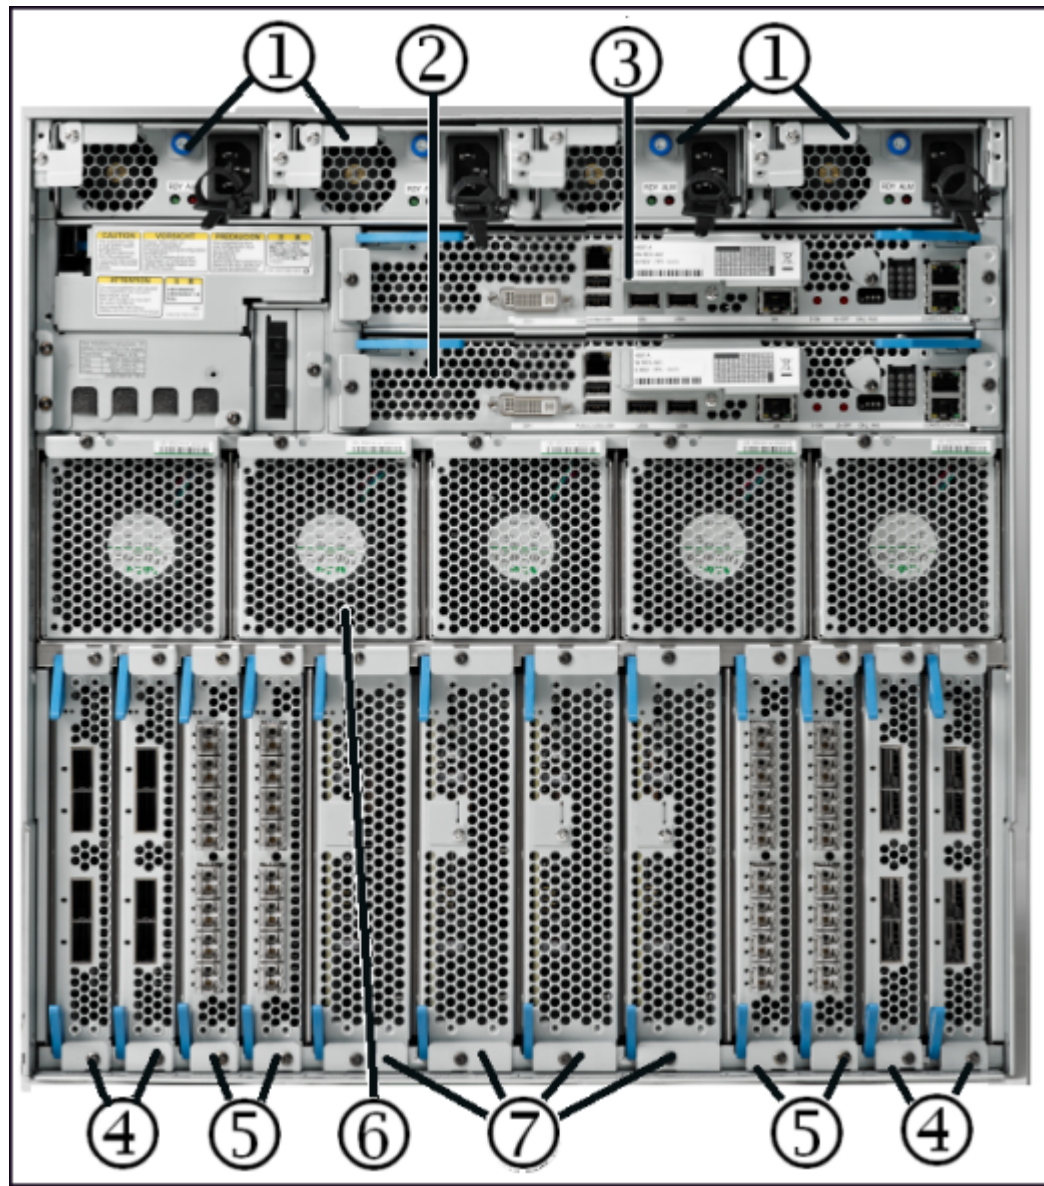


Figure 4 Controller, rear view

Table 6 Controller components - rear

Item	Name	Min	Max	Description
1	Power supply	2	4	200-240 VAC input. Provides power to the controller chassis in a redundant configuration. Each power supply contains two cooling fans to ensure adequate cooling if one fan fails.
2	Service Processor (SVP)	1	2	A custom PC that is used to monitor and control the storage system. It contains the Device Manager - Storage Navigator software that is used to configure and monitor the system. Connecting the SVP to a service center enables the storage system to be remotely monitored and maintained by the support team.

Item	Name	Min	Max	Description
3	Service Processor (SVP) or Hub	0	1	This space can be empty or can contain either a second SVP or a hub. When a second SVP is installed, the primary SVP is the active SVP, and the secondary SVP is the hot idle SVP with active Windows. A hub facilitates the transfer of information from the VSD pairs to the primary SVP.
4	back-end director or (optional) front-end director	0 if diskless 2 with drives	4	A back-end director (BED) provides connection to the HDD, SSD, and FMD drives. It controls functions for data transfer between the drives and the cache Important! Each back-end director and front-end director consists of a set of two of blades. See Flexible front-end director installation on page 32 for details.
5	front-end director (host I/O module)	1	2 to 5 with drives 6 if diskless system	A front-end director (FED) provide ports that support connectivity to the customer's open and mainframe systems. In addition, some of the FEDs support virtualization of externally attached storage, remote replication between the VSP G1000 and other storage systems as well as communication between two VSP G1000 storage systems in a Global Active Device cluster. See Front-end director on page 29 for details.
6	Cooling fan (exhaust)	5	5	The five exhaust fans on the rear of the controller pull hot air away from the components and push it out the back of the rack.
7	FED or VSD slot	0	4	These four slots on the controller support both front-end directors and VSDs. Note that both FEDs and VSDs must be installed in pairs.

Front-end director

A front-end director (FED) is a pair of blades that are installed in the controller. It connects the storage system to the host servers, processes channel commands from hosts, manages host access to the cache, and controls the transfer of data between the hosts and the VSP G1000 cache.

Hitachi offers the following front-end directors:

- Fibre Channel
- FICON (shortwave and longwave)
- Fibre Channel over Ethernet (FCoE)

The Fibre Channel FED may be configured with either shortwave or longwave host connectors. The FICON FEDs are configured with either longwave or shortwave connectors that match the wavelength of the mainframe ports.

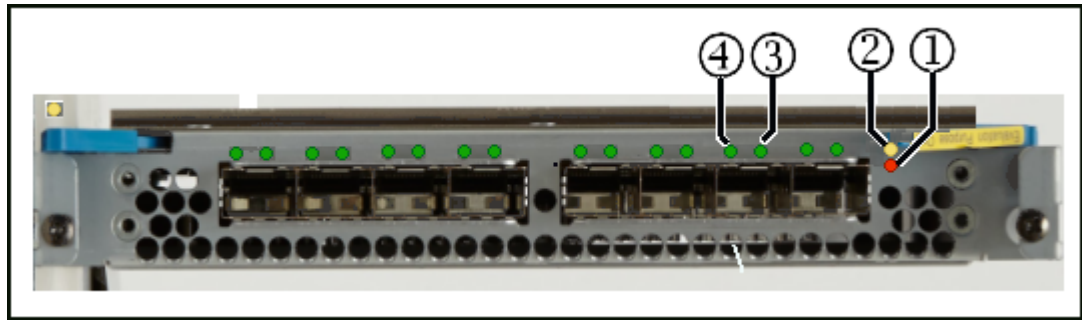


Figure 5 front-end director blade, Fibre Channel

Item	Name	Color	Description
1	Blade Status	Dark (off)	OFF - Power is not supplied to the system; system is not operational.
		Red (on)	ON - Board failure. Blade can be replaced while system is running.
2	Power supply Status	Dark (off)	OFF - Power is not supplied to the system, or, if power is supplied to the system, power supply in this blade is operational.
		Amber (on)	ON - Power supply failure, abnormal voltage in power supply.
3	Port Status (Fibre Channel)	Dark (off)	OFF - If system power is off, not ready.
		Green (on)	OFF - If system power is on, ready.
			ON - Link is active.
4	Link Activity (Fibre Channel)	Dark (off)	OFF - No link activity; three possible reasons: power is off, initialization not completed, and if system is operational, the port is not being accessed.
		Green (on)	ON (steady) Link is available & initialization complete, but connection to the host has not been established.
			Blinking - when port is being accessed and data is being transferred between the host and the cache.
3	Port Status (FICON)	Dark (off)	OFF - If system power is off, not ready.
		Green (on)	ON - Link is available & initialization has completed, but connection to the host has not been established.
			ON - Link is active.
4	Link Activity (FICON)	Dark (off)	OFF - No link activity; three possible reasons: power is off, initialization not completed, and if system is operational, the port is not being accessed.
		Amber (on)	ON (fast blink) - when port is being accessed and data is being transferred between the host and the cache.

Supported connections and protocols

Ports

Hitachi Data Systems offers a variety of FED blades. Some blades contain four ports while others have eight ports. Each port contains a host connector that sets the wavelength (short or long) and connects the adapter board to the fibre-optic cables. A two-controller system supports the following maximum number of connections via the FEDs:


- 192 Fibre Channel ports (16 Gbps, 16-port)

- 192 Fibre Channel ports (8 Gbps, 16-port)
- 96 Fibre Channel ports (16 Gbps, 8-port)
- 176 FICON ports (16 Gbps, 16-port) available in longwave and shortwave versions
- 176 FICON ports (800 Mbps, 16-port) available in longwave and shortwave versions
- 192 FCoE ports (10 Gbps, 16-port)

See [Site preparation on page 69](#), for information on port configurations.

Host connectors

A host connector is an LC type optical transceiver that converts electrical signals from the FED to light pulses that are supported by the fibre optic cables. Host connectors are either shortwave or longwave. Fibre channel FEDs are configured with shortwave host connectors by default. Longwave host connectors are available and may be substituted as needed.

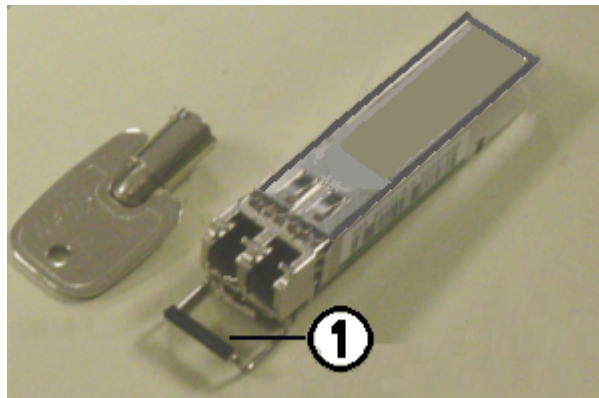

Item	Description
1 - Host connector lock lever	Black lever = shortwave (shown) Blue lever = longwave

Protocols

As shown in the following table, a FED supports Fibre Channel for open systems and FICON for mainframe systems.

FED	System	Ports	Mode	Description
16-port, 8 Gbps Fibre Channel, shortwave and longwave adapter. Supports remote replication, including TC, UR, and GAD.	Open	16 (8 per blade)	Target and Initiator ¹	<ul style="list-style-type: none"> • Contains two 8-port channel boards. Each port contains an LC type short wavelength, multi mode host connector. These are installed by default. • A long wavelength host connector (-1PL8) for single mode may be used instead of the short wavelength host connector

FED	System	Ports	Mode	Description
16-port, 16 Gbps Fibre Channel, shortwave and longwave adapter. Supports remote replication, including TC, UR, UVM, and GAD.	Open	16 (8 per blade)	Target and Initiator ¹	<ul style="list-style-type: none"> Contains two 8-port channel boards. Each port contains an LC type short wavelength, multi mode host connector. These are installed by default. A long wavelength host connector (-1PL8) for single mode may be used instead of the short wavelength host connector
8-port, 16 Gbps Fibre Channel, shortwave and longwave adapter.	Open	8 (4 per blade)	Target and Initiator ¹	<ul style="list-style-type: none"> Contains two 4-port channel boards. Each port contains an LC type short wavelength, multi mode host connector. These are installed by default. A long wavelength host connector (-1PL16) for single mode may be used instead of the short wavelength host connector
16-port, 8Gbps FICON shortwave adapter. Supports target mode for connectivity to mainframe hosts.	Mainframe	16 (8 per blade)	Target	<ul style="list-style-type: none"> Contains two 8-port channel boards. Each port contains a short wavelength (multi mode) host connector
16-port, 8Gbps FICON longwave adapter. Supports target mode for connectivity to mainframe hosts.	Mainframe	16 (8 per blade)	Target	<ul style="list-style-type: none"> Contains two 8-port channel boards. Each port contains an LC type long wavelength (multi mode) host connector
16-port, 16 Gbps FICON shortwave adapter. Supports target mode for connectivity to mainframe hosts.	Mainframe	16 (8 per blade)	Target	<ul style="list-style-type: none"> Contains two 8-port channel boards. Each port contains a short wavelength (multi mode) host connector
16-port, 16 Gbps FICON longwave adapter. Supports target mode for connectivity to mainframe hosts.	Mainframe	16 (8 per blade)	Target	<ul style="list-style-type: none"> Contains two 8-port channel boards. Each port contains an LC type long wavelength (multi mode) host connector
16 port, 10 Gbps Fibre Channel over Ethernet (FCoE).	Open	16 (8 per blade)	Target and Initiator ¹	<ul style="list-style-type: none"> Contains two 4-port channel boards. Each port contains an RJ-45 ethernet connector.
Notes: 1. Supports remote replication, including TC, UR, UVM, and GAD				

Flexible front-end director installation


The maximum number of FEDs that can be installed in the controller depends on the number of VSD pairs and back-end directors (BEDs) that are installed.

As shown in the figure below, the controller is built with 12 I/O slots, eight of which are dual-purpose. This provides a wide range of configuration flexibility.



Note: Each front-end director and back-end director consists of a set of two blades, as indicated by the numbers in the figure. A VSD, however, uses one slot, but is sold and installed in pairs.

- 8 of 12 I/O slots support different types of devices.
- Slots 1C/2C and 1D/2D are reserved for the first two front-end directors
- Slots 1E/2E and 1F/2F support the installation of both front-end directors and back-end directors
- Slots 1A/2A and 1B/2B support the installation of both front-end directors and virtual storage directors

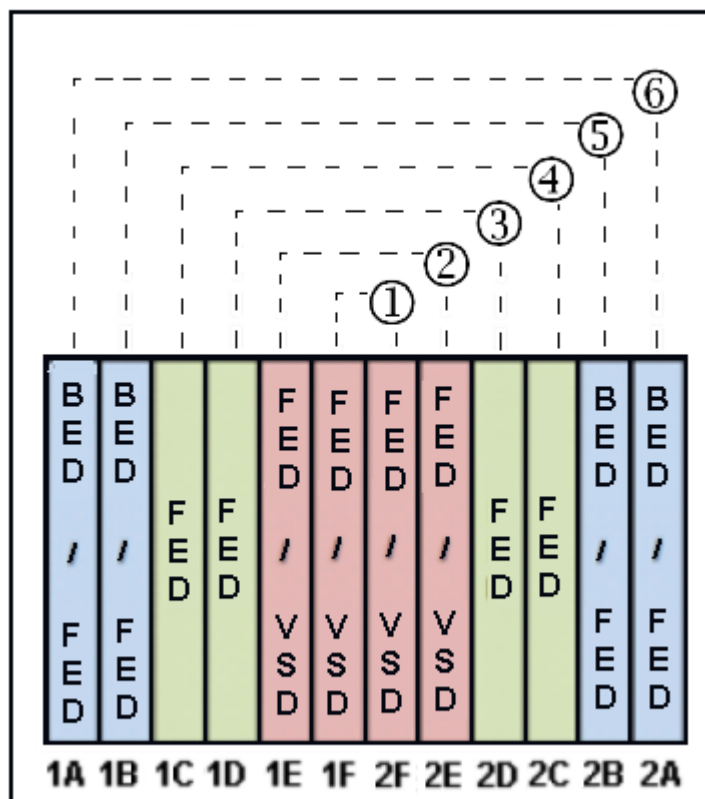

The following table shows the order of front-end director installation. If the VSP G1000 will include any internal drives, the controller requires a minimum of one Back-end Director pair and can be configured to support up to two Back-end Directors. The term "standard" describes a VSP G1000 controller configured with one Back-end Director, while "high performance" describes a VSP G1000 controller configured with two Back-end Directors. A VSP G1000 system that does not include any internal drives is referred to as a "diskless" configuration.

Installation order (see above figure)	Installation Slot Location					
	Diskless model		Standard model		High-performance model	
	DKC810I-CBXA/CBXAC	DKC-F810I-CBXB	DKC810I-CBXA/CBXAC	DKC-F810I-CBXB	DKC810I-CBXA/CBXAC	DKC-F810I-CBXB
1	1PC/2P C (CHA0)	1PJ/2PJ (CHA6)	1PC/2PC (CHA0)	1PJ/2PJ (CHA6)	1PC/2PC (CHA0)	1PJ/2PJ (CHA6)
2	1PD/2P D (CHA1)	1PK/2PK (CHA7)	1PD/2PD (CHA1)	1PK/2PK (CHA7)	1PD/2PD (CHA1)	1PK/2PK (CHA7)
3	1PE/2P E (CHA2/MPB3)	1PL/2PL (CHA8/MPB7)	1PE/2PE (CHA2/MPB3)	1PL/2PL (CHA8/MPB7)	1PE/2PE (CHA2/MPB3)	1PL/2PL (CHA8/MPB7)
4	1PF/2PF (CHA3/MPB2)	1PM/2PM (CHA9/MPB6)	1PF/2PF (CHA3/MPB2)	1PM/2PM (CHA9/MPB6)	1PF/2PF (CHA3/MPB2)	1PM/2PM (CHA9/MPB6)
5	1PB/2P B (DKA1/CHA4)	1PH/2PH (DKA3/CHA10)	1PB/2PB (DKA1/CHA4)	1PH/2PH (DKA3/CHA10)	—	—
6	1PA/2P A (DKA0/CHA5)	1PG/2PG (DKA2/CHA11)	—	1PG/2PG (DKA2/CHA11)	—	—

Supported speeds and cable lengths

The FEDs can be configured with either shortwave or longwave host connectors that match the cables connecting it to the host systems.

The following table lists the Fibre Channel cable length requirements for the front-end directors in the VSP G1000 storage system.

Table 7 Maximum cable length (short wave)

DataTransferRate	OM2 cable(50/125 um multi-mode fiber)	OM3 cable(50/125 um laser optimizedmulti-mode fiber)	OM4 cable(50/125 um laser optimizedmulti-mode fiber)
MB/s	feet / meters	feet / meters	feet / meters
200	984.3 / 300	1640.4 / 500	-
400	492.1 / 150	1246.7 / 380	1312.4 / 400
800	164 / 50	492.1 / 150	623.4 / 190

Data Transfer Rate	OM2 cable(50/125 um multi-mode fiber)	OM3 cable(50/125 um laser optimized multi-mode fiber)	OM4 cable(50/125 um laser optimized multi-mode fiber)
MB/s	feet / meters	feet / meters	feet / meters
1600	118 / 35	328 / 100	410.1 / 125

Table 8 Maximum cable length (long wave)

Data Transfer Rate(MB/s)	Cable length (km) OM3 cable
200, 400, 800, 1600	10

Drive chassis

The VSP G1000 supports three different drive chassis as described below. All components in the drive chassis are configured in redundant pairs to prevent system failure. All components in the drive chassis can be added or replaced while the storage system is in operation. See [Table 33 Drive specifications on page 136](#) for detailed information about the drives in each chassis.

- SFF - a 16U group of eight 2U drive trays, each containing up to 24 vertically positioned 2.5-inch HDD and/or SSD drives, for a total of 192 drives per chassis. Each drive tray also contains two redundant power supplies, and two ENC adapters that connect the drives to the controller. The connection to the controller may be direct, or it can be connected through other SFF drive trays. See [Figure 19 SAS Connection Diagram of Rack-00 \(SFF/LFF Standard Model\) on page 89](#).
- LFF - a 16U group of eight 2U drive trays, each containing up to 12 horizontally positioned 3.5-inch drives, for a total of 96 drives per chassis. Each drive tray also contains two redundant power supplies, and two adapters that are used to connect the drives to the controller. The connection to the controller may be direct, or it can be connected through other LFF drive trays. See [Figure 19 SAS Connection Diagram of Rack-00 \(SFF/LFF Standard Model\) on page 89](#).
- FMD - an 8U group comprising four 2U drive trays, each containing up to 12 horizontally mounted 5.25-inch Hitachi flash module drives, with a total of 48 drives per chassis. Each drive tray also contains two redundant power supplies and two adapters that connect the drives to the controller. The connection to the controller may be direct, or it can be connected through other FMD drive trays. See [Figure 21 SAS Connection Diagram of Rack-00 \(FBX Standard Model\) on page 91](#).

The following illustrations show the front and rear panels of the three types of 2U drive trays, and the following tables describe the connectors and LEDs.

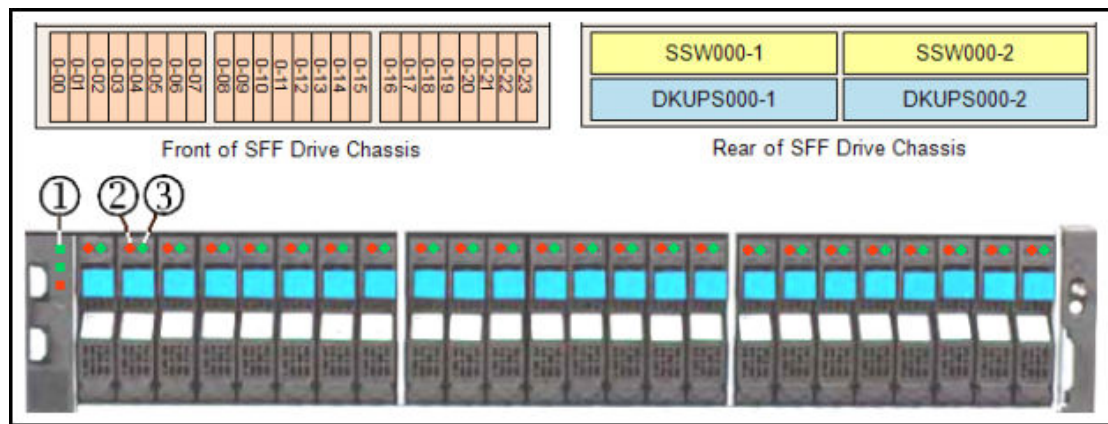


Figure 6 SFF 2U drive tray diagram and front view

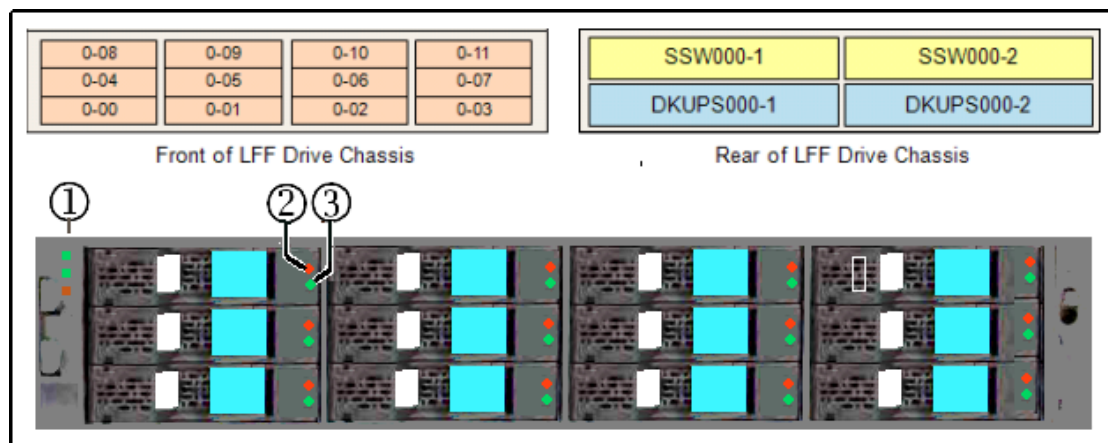


Figure 7 LFF 2U drive tray diagram and front view

Item	Name	Color	Description
1	POWER LED	Green	OFF - Power is not supplied to the system ON - Power is supplied to the system
	READY LED	Green	OFF - system is not operational ON - normal operation. Storage system is operational.Fast blink - internal processing. Storage system is operational.Slow blink - offline download processing completed (maintenance).
	LOCATE LED	Orange	OFF - normal operation ON - nonfatal error. Storage system can remain operating. Contact technical support. See <i>Getting Help</i> in the preface of this manual.
2	ALM LED (alarm)	Red	OFF - normal operation ON - fatal error. Contact technical support. See <i>Getting Help</i> in the preface of this manual.
3	ACT LED (Active)	Green	OFF - drive is not being accessed

Item	Name	Color	Description
			Blinking - when drive is being accessed.

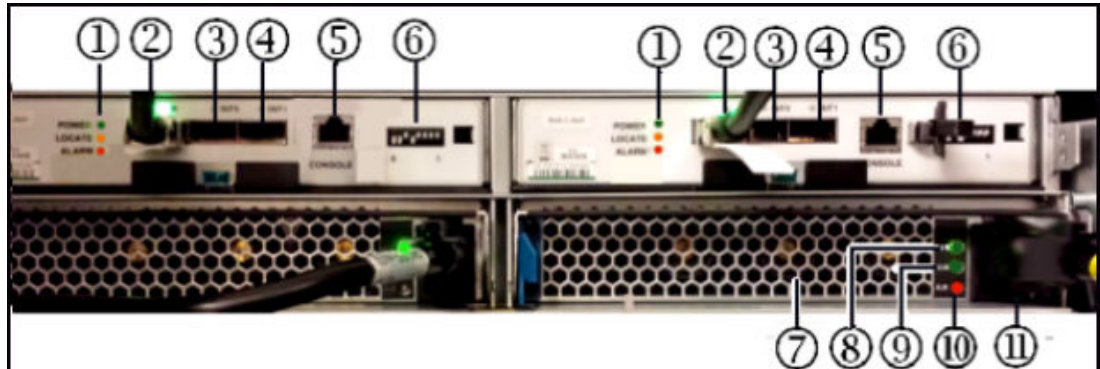


Figure 8 2U SFF and LFF drive tray, rear view

Item	Name	Color	Description
1	POWER LED	Green	OFF - no power is supplied to the system ON - Power is supplied to the system
	READY LED	Green	ON - normal operation. Storage system is operational. Fast blink - internal processing. Storage system is operational. Slow blink - offline download processing completed (maintenance).
	LOCATE LED	Orange	ON - nonfatal error. Storage system can continue operating. Contact technical support. See <i>Getting Help</i> in the preface of this manual.
2	ENC IN LED	Green	ON - Indicates that the port is connected to an OUT port in the controller. This can be directly or via another drive box with daisy chained cables
3	ENC IN connector	-	Connects the drives to the ENC OUT port in the control chassis either directly, or via another drive box with daisy chained cables.
4	ENC OUT connector	-	Connects the drives to the ENC IN port in the control chassis either directly, or via another drive box with daisy chained cables.
5	ENC OUT LED	Green	ON - Indicates that the port is connected to an IN port in the controller. This can be directly or indirectly, as described above.
6	Console port	-	RJ-45 connector (not used)
7	Power Supply	-	Converts 200 VAC to the DC voltages used by the drives and the ENC adapters.
8	RDY (Ready) LED	Green	OFF - no power is supplied to the system or the power supply has failed. ON - The power supply is operating normally.
9	AC IN LED	Green	ON - AC input is normal.
10	ALM (Alarm) LED	Red	Power supply has failed. Contact technical support. See <i>Getting Help</i> in the preface of this manual.
11	AC Socket	-	For IEC60320-C14 plug, 200 - 240 VAC +8% - 6% 50/60 Hz


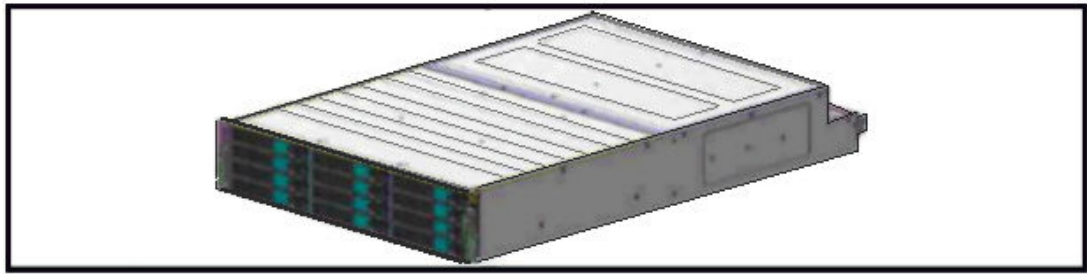


Figure 9 FMD drive tray

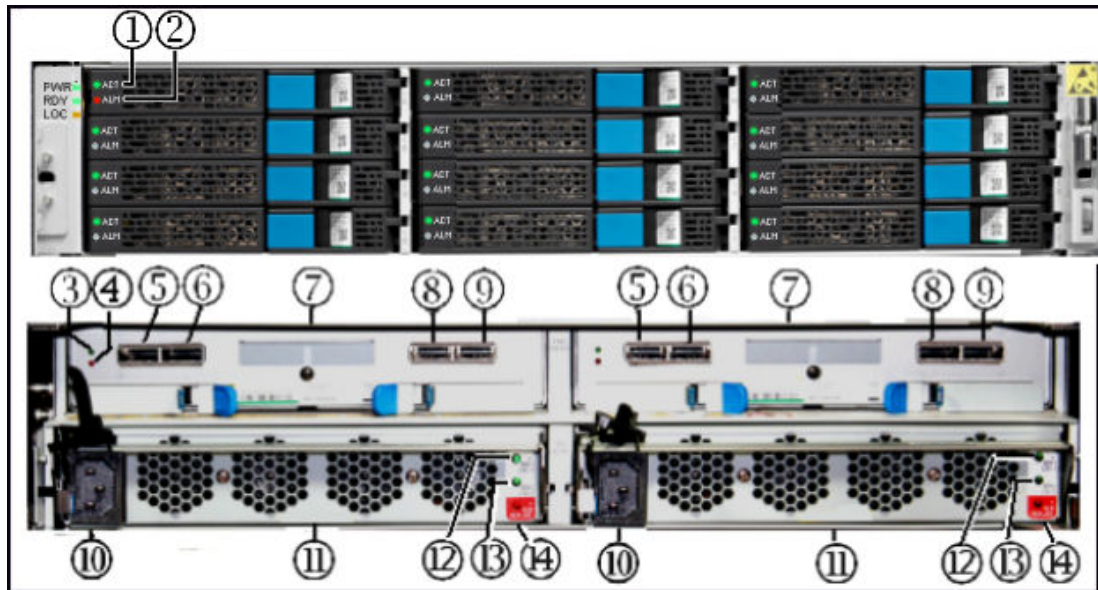

Item	Description	Item	Description	Item	Description
1	Flash module Active LED - lights when the flash module is activated- Blinks at drive access	2	Flash module Alarm LED - lights when the flash module has an error and should be replaced	3	SAS / ENC Module Power LED
4	SAS / ENC Module Alarm LED - indicates fatal error condition	5	SAS / ENC standard IN connector	6	SAS / ENC high performance IN connector
7	ENC adapter - connects the flash modules to the BEDs in the controller via ENC cables.	8	SAS / ENC standard OUT connector	9	SAS / ENC high performance OUT connector
10	Power cord receptacle	11	Power Supply - 220 VAC input, draws approximately 265 watts	12	Power Supply Ready 1 LED - lights when 12 VDC power #1 is ready.
13	Power Supply Ready 2 LED - lights when 12 VDC power #2 is ready.	14	Power Supply alarm LED - lights when power supply has an error.		

Cache memory


The VSP G1000 can be configured with 64 GB to 1 TB of cache memory per controller. The cache memory is installed in one or two cache path control adapters (CPA). A CPA feature consists of a pair of redundant blades that are installed and work together to provide cache and shared memory for the system. The following figure shows two CPAs (2-3, and 1-4).

Cache memory modules (DIMMs) are available in either 16 GB or 32 GB sizes. Since the minimum memory required per controller is 64 GB, either two 16 GB DIMMs or one 32 GB DIMM must be installed in each CPA blade. The memory modules in a system must all be the same size.

The following table shows minimum and maximum cache capacities per controller. Double these figures for a two-controller system.

Table 9 Cache capacities per controller

Number of CPAs	Memory module size	Cache size ¹
1	16 GB	min = 64 GB; max = 256 GB
	32 GB	min = 64 GB; max = 512 GB
2	16 GB	min = 128 GB; max = 512 GB
	32 GB	min = 128 GB; max = 1 TB
Notes:		
1. One DIMM minimum, eight DIMMs maximum per board. Two blades/boards per CPA. One or 2 CPAs installed per controller.		
2. HDS minimum cache per system is 64 GB whether configured with one or two controllers.		

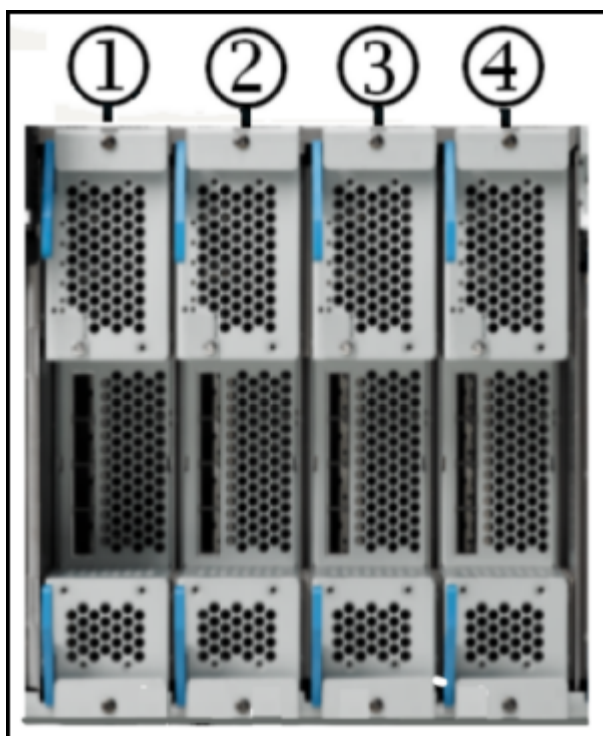

Item	Description	Item	Description
2 & 3	Main (required) cache path control adapters	1 & 4	Optional cache path control adapters
1 & 2	Cluster 1	3 & 4	Cluster 0

Memory operation

The VSP G1000 places all read and write data in the cache. The amount of fast-write data in cache is dynamically managed by the cache control algorithms to provide the optimum amount of read and write cache, depending on the workload read and write I/O characteristics.

Data protection

The VSP G1000 is designed so that it cannot lose data or configuration information from the cache if the power fails. The cache is kept alive for up to 32 minutes by the cache backup batteries while the system configuration and data are copied to the cache flash memory (SSD) in the cache backup modules. This is explained in detail in [Cache flash memory on page 43](#), and in [Battery backup operations on page 125](#).

Cache capacity

The recommended amount of cache to install is determined by the RAID level, the number of drives installed in the system, and whether Hitachi Dynamic Provisioning (HDP), Hitachi Dynamic Tiering (HDT), Dynamic Cache

Residency (DCR), and Universal Volume Manager (UVM) are applied or not. The recommended data cache capacity per Cache Logical Partition (CLPR) = (CLPR capacity) - (DCR Extent setting capacity per CLPR). When CLPR is not applied to DP/DT/DCR, install the recommended data cache capacity shown in the following table. To configure a system for maximum performance, please contact your authorized Hitachi Data Systems representative. See *Getting Help* in the preface of this manual.

Table 10 Recommended data cache capacity when DP, DT, DCR, and UVM are not being used

Total logical capacity of external volumes + internal volumes per CLPR	Recommended data cache capacity per CLPR
Less than 2,900 GB	15 GB or more
less than 2,900 GB	15 GB or more
2,900 GB or more	16 GB or more
11,500 GB or more	22 GB or more
14,400 GB or more	24 GB or more
100,000 GB or more	30 GB or more
128,000 GB or more	32 GB or more
182,000 GB or more	40 GB or more
218,000 GB or more	48 GB or more
254,000 GB or more	56 GB or more
290,000 GB or more	64 GB or more
326,000 GB or more	72 GB or more

Shared memory

Shared memory, which holds storage system configuration information, resides in the cache. The capacity of the shared memory + the capacity of the cache memory = the total capacity of the cache memory needed by the storage system.

The following table shows the shared memory capacity needed depending on the kind of software applications installed in the system.


Number of CU	Judgment factor of SM capacity									SM capacity
	Software ¹					SI/VM/N DM extensio n	DP/HDT/TI extension			
	SI/VM / NDM	HDP/TI/F C	TPF	TC/UR / GAD	HDT		1	2	3	
1-64 (16k LDEV)	Apply	Apply	—	—	—	—	—	—	—	16 GB
1-64 (16k LDEV)	Apply	Apply	—	Apply	—	—	—	—	—	24 GB

Number of CU	Judgment factor of SM capacity									SM capacity
	Software ¹					SI/VM/N DM extension	DP/HDT/TI extension			
	SI/VM / NDM	HDP/TI/FC	TPF	TC/UR / GAD	HDT		1	2	3	
1-64 (16k LDEV)	Apply	Apply	—	—	Apply	—	—	—	—	24 GB
1-64 (16k LDEV)	Apply	Apply	—	—	—	—	Apply	—	—	24 GB
1-255 (64k LDEV)	Apply	Apply	Apply	—	—	Apply	—	—	—	24 GB
1-64 (16k LDEV)	Apply	Apply	—	Apply	Apply	—	—	—	—	32 GB
1-64 (16k LDEV)	Apply	Apply	—	Apply	—	—	Apply	—	—	32 GB
1-64 (16k LDEV)	Apply	Apply	—	—	Apply	—	Apply	—	—	32 GB
1-255 (64k LDEV)	Apply	Apply	Apply	Apply	—	Apply	—	—	—	32 GB
1-255 (64k LDEV)	Apply	Apply	Apply	—	Apply	Apply	—	—	—	32 GB
1-255 (64k LDEV)	Apply	Apply	Apply		—	Apply	Apply	—	—	32 GB
1-64 (16k LDEV)	Apply	Apply	—	Apply	Apply	—	Apply	—	—	40 GB
1-64 (16k LDEV)	Apply	Apply	—	—	—	—	Apply	Apply	—	40 GB
1-255 (64k LDEV)	Apply	Apply	Apply	Apply	Apply	Apply	—	—	—	40 GB
1-255 (64k LDEV)	Apply	Apply	Apply	—	Apply	Apply	Apply	—	—	40 GB
1-255 (64k LDEV)	Apply	Apply	Apply	Apply	—	Apply	Apply	—	—	40 GB
1-64 (16k LDEV)	Apply	Apply	—	Apply	—	—	—	Apply	Apply	48 GB
1-64 (16k LDEV)	Apply	Apply	—	—	Apply	—	Apply	Apply	—	48 GB
1-255 (64k LDEV)	Apply	Apply	Apply	Apply	Apply	Apply	Apply	—	—	48 GB
1-255 (64k LDEV)	Apply	Apply	Apply	—	—	Apply	Apply	Apply	—	48 GB
1-64 (16k LDEV)	Apply	Apply	—	Apply	Apply	—	Apply	Apply	—	56 GB
1-64 (16k LDEV)	Apply	Apply	—	—	—	—	Apply	Apply	Apply	56 GB
1-255 (64k LDEV)	Apply	Apply	Apply	Apply	—	Apply	Apply	Apply	—	56 GB
1-255 (64k LDEV)	Apply	Apply	Apply	—	Apply	Apply	Apply	Apply	—	56 GB
1-64 (16k LDEV)	Apply	Apply	—	Apply	—	—	Apply	Apply	Apply	64 GB
1-64 (16k LDEV)	Apply	Apply	—	—	Apply	—	Apply	Apply	Apply	64 GB

Number of CU	Judgment factor of SM capacity									SM capacity
	Software ¹					SI/VM/N DM extension	DP/HDT/TI extension			
	SI/VM / NDM	HDP/TI/FC	TPF	TC/UR / GAD	HDT		1	2	3	
1-255 (64k LDEV)	Apply	Apply	Apply	—	—	Apply	Apply	Apply	Apply	64 GB
1-255 (64k LDEV)	Apply	Apply	Apply	Apply	Apply	Apply	Apply	Apply	—	64 GB
1-64 (16k LDEV)	Apply	Apply	—	Apply	Apply	—	Apply	Apply	Apply	72 GB
1-255 (64k LDEV)	Apply	Apply	Apply	Apply	—	Apply	Apply	Apply	Apply	72 GB
1-255 (64k LDEV)	Apply	Apply	Apply	—	Apply	Apply	Apply	Apply	Apply	72 GB
1-255 (64k LDEV)	Apply	Apply	Apply	Apply	Apply	Apply	Apply	Apply	Apply	80 GB
<div><div>1. Software includes the following applications:</div><div><div>• SI = ShadowImage</div><div>• HDP = Hitachi Dynamic Provisioning</div><div>• FC = Compatible FlashCopy® V2</div><div>• TC = TrueCopy</div><div>• HDT = Hitachi Dynamic Tiering</div><div>• NDM = nondisruptive migration</div><div>• VM = Volume Migration V2</div><div>• TI = Thin ImageVolume Migration V2</div><div>• TPF = Transaction Processing Facility</div><div>• UR = Universal Replicator</div><div>• GAD = global-active device</div></div></div> <div><div>2. The required cache memory capacity is determined by the storage capacity and the number of Processor Blades.</div></div>										

Cache flash memory

The cache flash memory (CFM) is contained in the cache backup modules (boxes) in the controller, along with the cache backup batteries. Like the cache memory, a CFM feature consists of a pair of redundant boxes that are installed and work together. They provide backup for the cache in case of power or component failure. The following figure shows two CPAs (2-3, and 1-4).

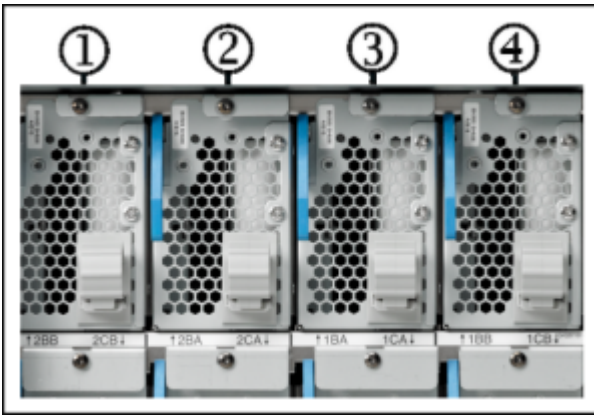

CFM operation

Each CFM blade is connected directly to its corresponding CPA blade and backs up the data in that CPA blade if power fails. When data that is not already stored on disk is written to the cache, it is written to one blade of the CPA and mirrored to the other. If one CFM box fails, or one phase of the power fails, the other CFM box backs up the mirrored data from its corresponding CPA blade, and no data is lost. In the unlikely event where a CFM box has failed and a full power failure occurs, the other CFM box backs up the mirrored data from the CPA and no data is lost.

Cache flash memory capacity

The recommended size of the installed cache flash memory depends on the size of the cache memory, and is automatically selected when defining the configuration for the system.

The following table shows CFM capacities per controller with both small and large cache memory backup assemblies.

Number of controllers	Number of CFM features (pairs of boxes)	Memory module size	CFM size ¹
1	1 CFM	128 GB	256 GB
	2 boxes /SSDs	256 GB	512 GB
	2 CFMs	128 GB	512 GB
	4 boxes /SSDs	256 GB	1 TB
2	1 CFM	128 GB	512 GB
	2 boxes /SSDs	256 GB	1 TB
	2 CFMs	128 GB	1 TB
	4 boxes /SSDs	256 GB	2 TB
Notes:			

Number of controllers	Number of CFM features (pairs of boxes)	Memory module size	CFM size ¹
1. SDD sizes must be the same in all CFM. Cache must be distributed evenly across CFMs and controllers.			



Note: The small CFM SSDs (128 GB) can be installed in the large cache backup boxes, allowing for easier and less expensive upgrades.

Hardware architecture

This chapter describes the Hitachi Virtual Storage Platform G1000 system architecture, including some of the functional and operational characteristics.


- ☐ [System architecture overview](#)
- ☐ [Hardware architecture](#)
- ☐ [VSP G1000 RAID implementation](#)
- ☐ [CU images, LVIs, and logical units](#)
- ☐ [Mainframe operations](#)
- ☐ [Systems operations](#)
- ☐ [Host modes and host mode options](#)
- ☐ [Device Manager - Storage Navigator](#)

System architecture overview

This section describes the architecture of the Hitachi Virtual Storage Platform G1000 storage system.

Hardware architecture

The basic system architecture of a single controller is shown in the following diagram.

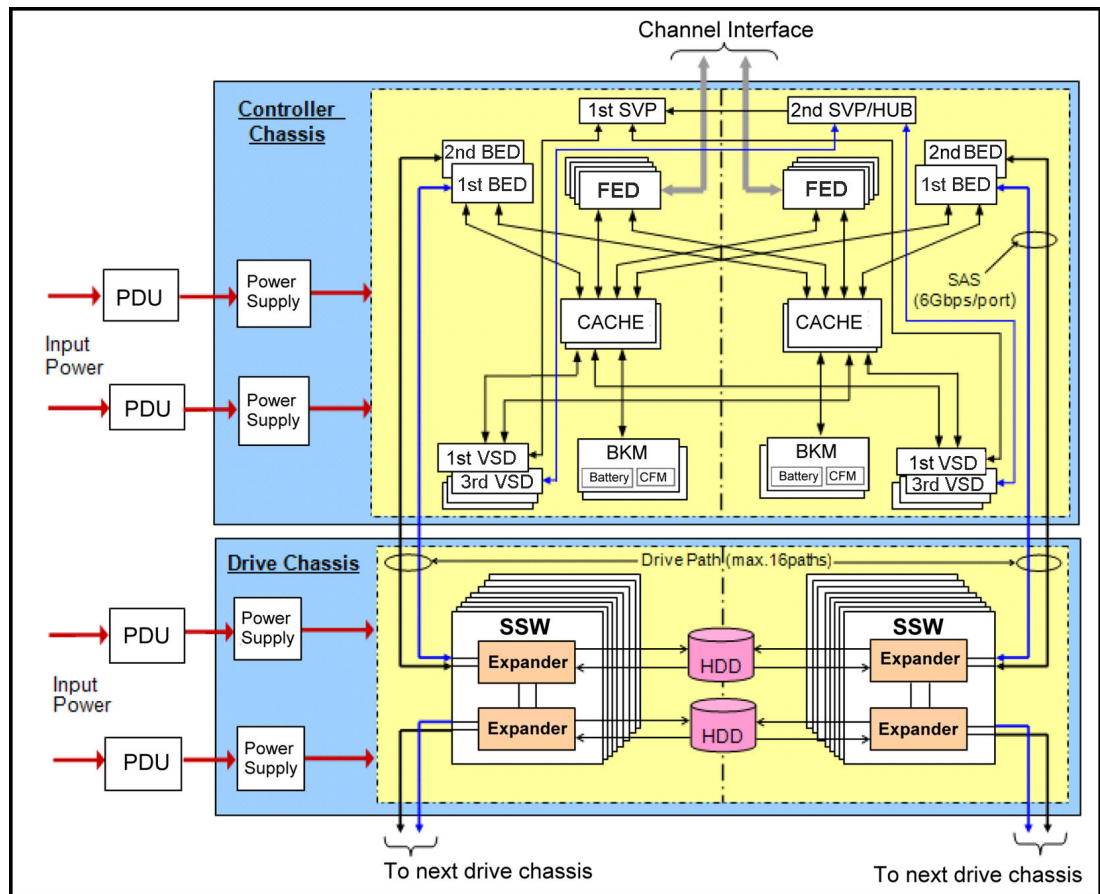

In this architecture, the virtual storage directors (microprocessors) are shared across the cache, front-end directors (host adapters), and back-end directors (disk adapters), providing processing power where and when it is needed, without wait time or interruption. This significantly increases the I/O throughput, up to three times the speed of the VSP system. The system provides a highly granular upgrade path, allowing the addition of drives to the drive chassis, and components such as virtual storage directors to the controller chassis as storage needs increase.

VSP G1000 RAID implementation

This section provides an overview of the implementation of RAID technology used on the Hitachi Virtual Storage Platform G1000 storage system.

The objectives of RAID technology are low cost, high reliability, and high I/O performance of data storage devices. To achieve these objectives, this storage system supports RAID levels 1, 5 and 6. RAID level 3 is partly explained to make the outline of RAID5 more understandable, although RAID3 is not supported by the VSP G1000. The features of the levels of RAID technologies are described below.

Array groups and RAID levels

The array group (also called parity group) is the basic unit of storage capacity for the VSP G1000 storage system. In RAID1, an array group is a set of four physical drives where one drive is installed in the same location in each of four contiguous disk trays in the same drive chassis. The following illustration shows part of a SFF drive chassis where two RAID1 array groups are set up. RAID group 1 consists of the drives highlighted by yellow rectangles. RAID group 2 is shown by the red rectangles.




Figure 10 RAID group example

In the above illustration, the drives with the red rectangles are not formatted (and are just physical drives) so they are called an array group. The drives with the yellow rectangles have been formatted as a RAID level and have initial parity data on them, so they are called a parity group. But in the field, this technical distinction is often lost, and the terms parity group and array group are often used interchangeably.


The VSP G1000 supports the following RAID levels: RAID1, RAID5, and RAID6. RAID0 is not supported on the VSP G1000. When configured in four-drive RAID5 parity groups (3D+1P), three-fourths of the raw capacity is available to store user data, and one fourth of the raw capacity is used for parity data.

RAID1

The following two figures illustrate the RAID1 configurations. The tables following the figures describes each configuration.

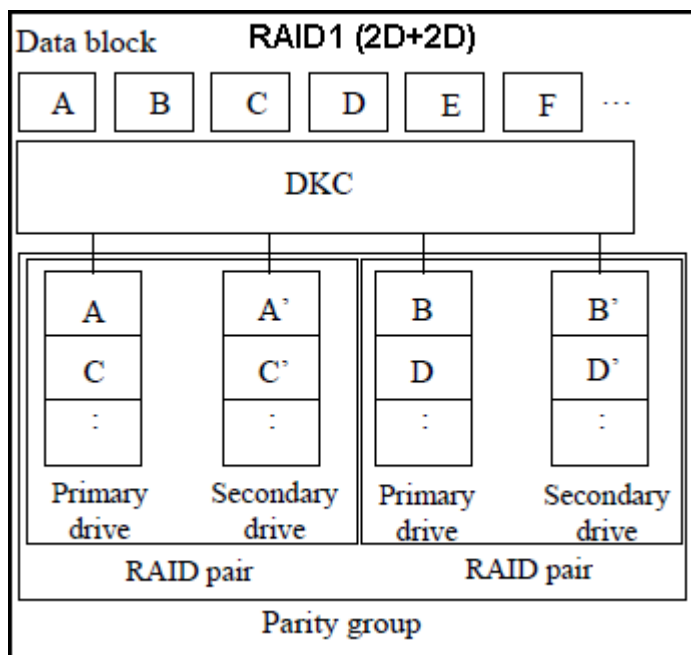

Item	Description
Description	Mirror disks (duplicated writing) Two disk drives, primary and secondary disk drives, compose a RAID pair (mirroring pair) and the identical data is written to the primary and secondary disk drives. Further, data is scattered on the two RAID pairs.
Advantage	RAID1 is highly usable and reliable because of the duplicated data. It has higher performance than ordinary RAID1 (when it consists of two disk drives) because it consists of the two RAID pairs.
Disadvantage	Requires disk capacity twice as large as the user data.

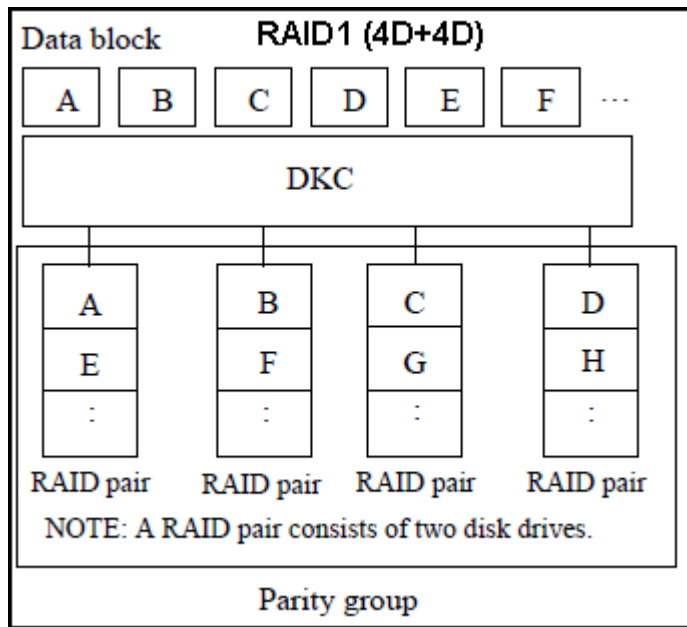

Item	Description
Description	Mirror disks (duplicated writing) The two parity groups of RAID1(2D+2D) are concatenated and data is scattered on them. In the each RAID pair, data is written in duplicate.
Advantage	This configuration is highly usable and reliable because of the duplicated data. It has higher performance than the 2D+2D configuration because it consists of the four RAID pairs.
Disadvantage	Requires disk capacity twice as large as the user data.


RAID5

A RAID 5 array group consists of four or eight drives, (3D+1P) or (7D+1P). The data is written across the four (or eight) drives in a stripe that has three (or seven) data chunks and one parity chunk. Each chunk contains either eight logical tracks (mainframe) or 768 logical blocks (open). This RAID 5 implementation minimizes the write penalty incurred by standard RAID 5 implementations by keeping write data in cache until the entire stripe can be built, and then writing the entire data stripe to the drives. The 7D+1P RAID 5 increases usable capacity and improves performance.


The following two figures illustrate the RAID5 configurations. The tables following the figures describes each configuration.



Note: There are two configurations of RAID5: 3D+1P configuration (four disk drives) and 7D+1P configuration (eight disk drives). The following diagram shows the 3D+1P configuration. In the 7D+1P configuration, data is arranged in the same way.

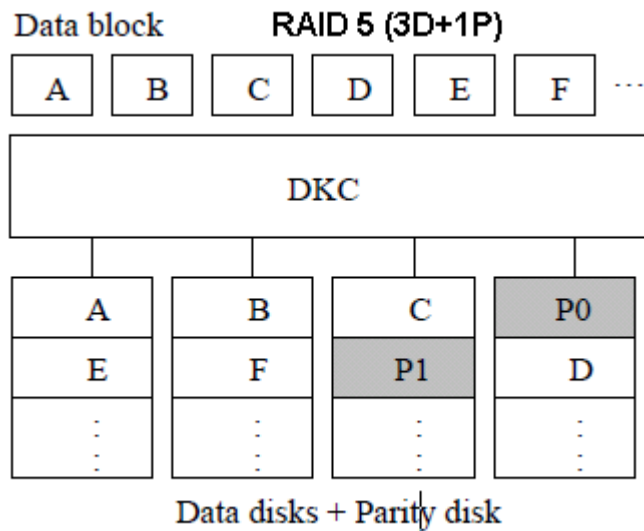

Item	Description
Description	Data is written to multiple disks successively in units of block (or blocks). Parity data is generated from data of multiple blocks and written to disk.
Advantage	RAID5 is well suited to support transaction operations that mainly use small size random access because each disk can receive I/O instructions independently. It can provide high reliability and usability at a comparatively low cost by virtue of the parity data.
Disadvantage	Write penalty of RAID5 is larger than that of RAID1 because pre-update data and pre-update parity data must be read internally as the parity data is updated when data is updated.

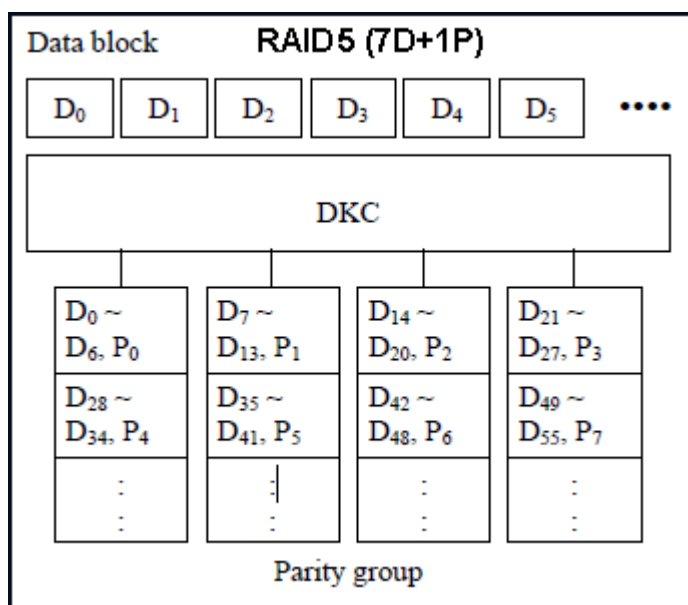

Item	Description
Description	In the case of RAID5 (7D+1P), two or four parity groups (eight drives) are concatenated, and the data is distributed and arranged in 16 drives or 32 drives.
Advantage	If a RAID5 (3D+1P) parity group becomes a performance bottleneck, you might achieve performance improvement through the added drives in a RAID5 (7D+1P) configuration.
Disadvantage	The impact when two drives are blocked is significant because twice/four times the number of LDEVs are arranged in the parity group when compared with RAID5 (3D+1P). However, the chance that the read of the single block in the parity group cannot be performed due to failure is the same as that of RAID5 (3D+1P).

[Figure 11 Sample RAID5 3D + 1P Layout \(Data Plus Parity Stripe\) on page 54](#) illustrates RAID5 data stripes mapped across four physical drives. Data and parity are striped across each of the drives in the array group (hence the term “parity group”). The logical devices (LDEVs) are evenly dispersed in the array group, so that the performance of each LDEV within the array group is the same. This figure also shows the parity chunks that are the Exclusive OR (XOR) of the data chunks. The parity and data chunks rotate after each stripe. The total data in each stripe is 2304 blocks (768 blocks per chunk) for open-systems data. Each of these array groups can be configured as either 3390-x or OPEN-x logical devices. All LDEVs in the array group must be the same format (3390-x or OPEN-x). For open systems, each LDEV is mapped to a SCSI address, so that it has a track identifier (TID) and logical unit number (LUN).

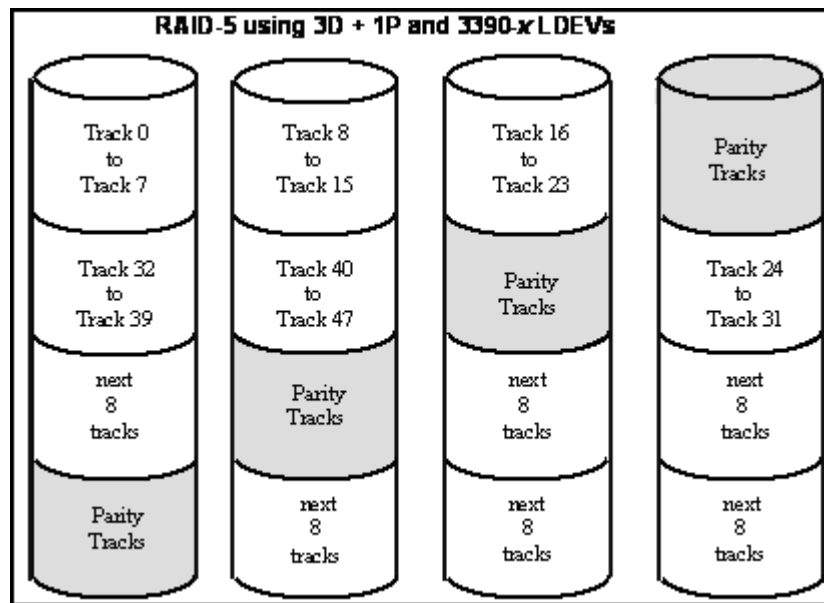


Figure 11 Sample RAID5 3D + 1P Layout (Data Plus Parity Stripe)

RAID6


A RAID6 array group consists of eight drives (6D+2P). The data is written across the eight drives in a stripe that has six data chunks and two parity chunks. Each chunk contains 768 logical blocks.

In RAID6, data can be assured when up to two drives in an array group fail. Therefore, RAID6 is the most reliable of the RAID levels.

The following figure illustrates the RAID6 configuration. The table following the figure describes it.



Note: There are two configurations of RAID6: 6D+2P configuration (eight disk drives) and 14D+2P configuration (sixteen disk drives). The following diagram shows the 6D+2P configuration.

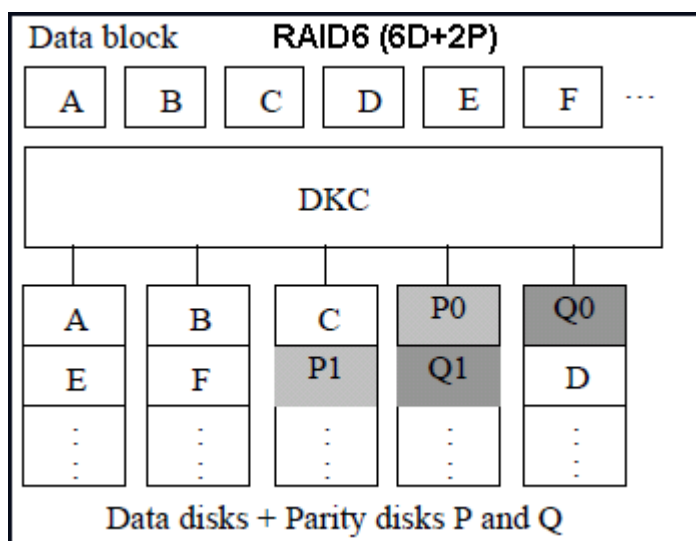

Item	Description
Description	Data blocks are scattered to multiple disks in the same way as RAID5 and two parity disks, P and Q, are set in each row. Therefore, data can be assured even when failures occur in up to two disk drives in a parity group.
Advantage	RAID6 is far more reliable than RAID1 and RAID5 because it can restore data even when failures occur in up to two disks in a parity group.
Disadvantage	Because the parity data P and Q must be updated when data is updated, RAID6 imposes a write heavier than that on RAID5, performance of the random writing is lower than that of RAID5 in the case where the number of drives makes a bottleneck.

LDEV striping across array groups

In addition to the conventional concatenation of RAID1 array groups (4D +4D), the VSP G1000 supports LDEV striping across multiple RAID5 array groups for improved logical unit performance in open-system environments. The advantages of LDEV striping are:

- Improved performance, especially of an individual logical unit, due to an increase in the number of drives that constitute an array group.
- Better workload distribution: in the case where the workload of one array group is higher than another array group, you can distribute the workload by combining the array groups, thereby reducing the total workload concentrated on each specific array group.

The supported LDEV striping configurations are:

- LDEV striping across two RAID5 (7D+1P) array groups. The maximum number of LDEVs in this configuration is 1000. See the following figure.
- LDEV striping across four RAID5 (7D+1P) array groups. The maximum number of LDEVs in this configuration is 2000. See [Figure 13 LDEV Striping Across 4 RAID5 \(7D+1P\) Array Groups on page 57](#).

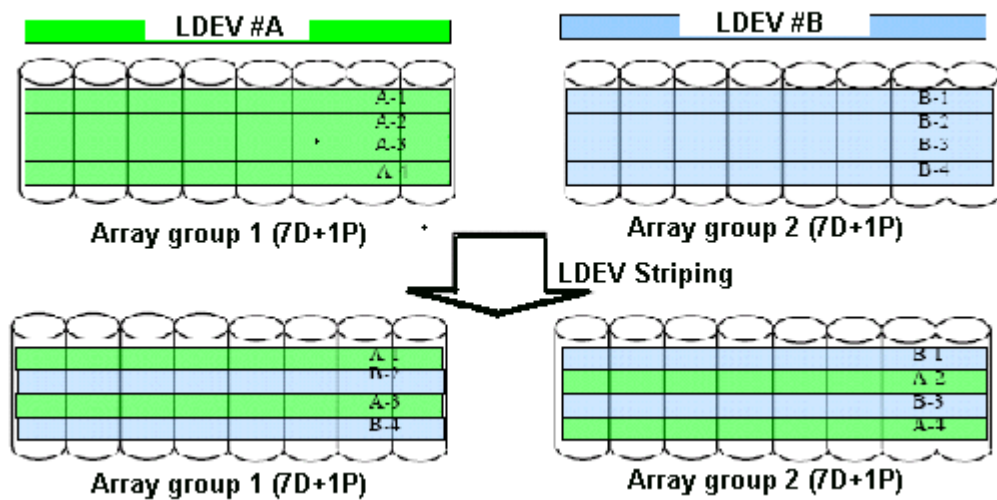


Figure 12 LDEV Striping Across 2 RAID5 (7D+1P) Array Groups

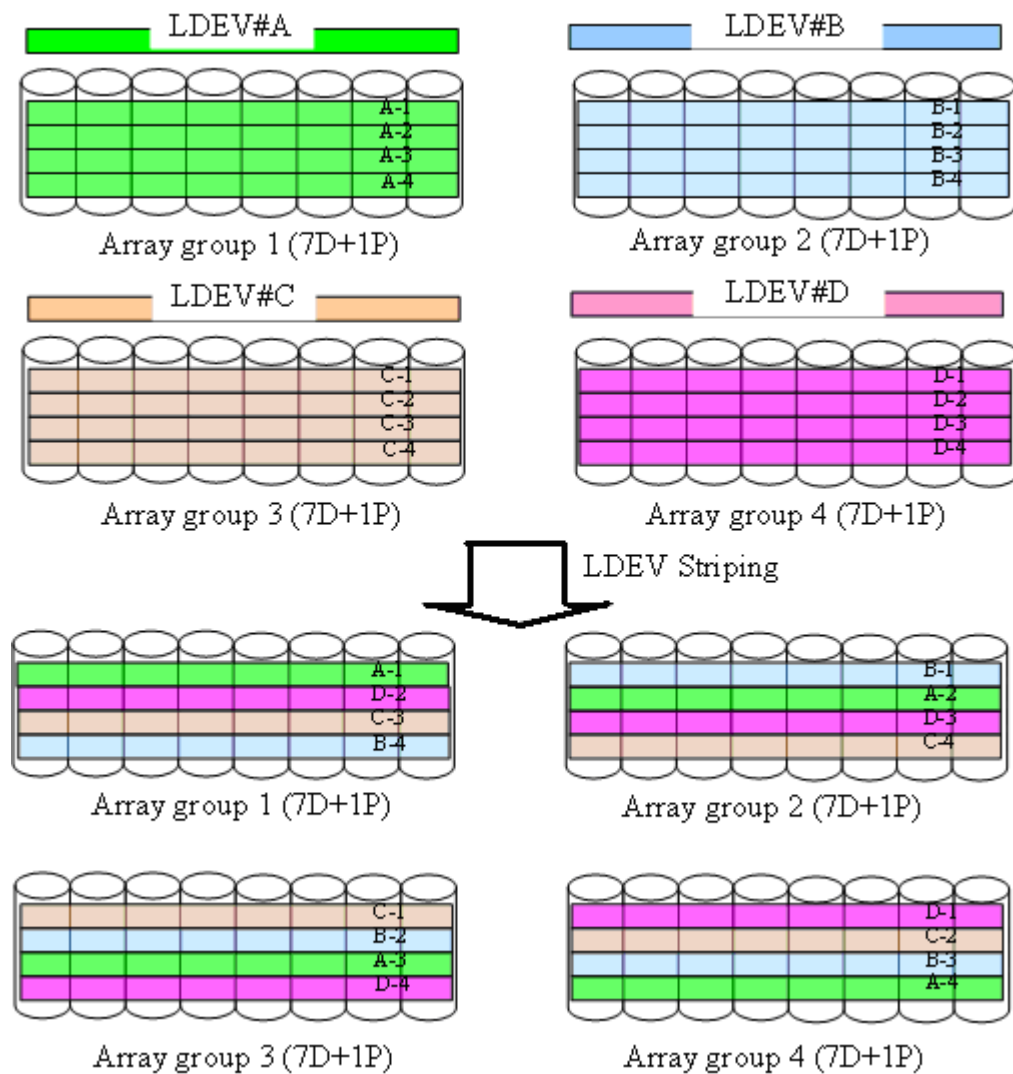


Figure 13 LDEV Striping Across 4 RAID5 (7D+1P) Array Groups

All drives and device emulation types are supported for LDEV striping. LDEV striping can be used in combination with all VSP G1000 data management functions.

CU images, LVIs, and logical units

This section provides information about control unit images, logical volume images, and logical units.

CU images

The VSP G1000 is configured with one control unit image for each 256 devices (one SSID for each 64 or 256 LDEVs) and supports a maximum of 255 CU images in the primary logical disk controller (LDKC).

The VSP G1000 supports the following control unit (CU) emulation types:

- 3990-6, 3990 6E
- 2107

The mainframe data management features of the VSP G1000 may have restrictions on CU image compatibility.

For further information on CU image support, refer to the *Mainframe Host Attachment and Operations Guide*, or contact your Hitachi Data Systems account team.

Logical volume images

The VSP G1000 supports the following mainframe LVI types:

- 3390-3, -3R, -9, L, and -M. The 3390-3 and 3390-3R LVIs cannot be intermixed in the same storage system.

The LVI configuration of the VSP G1000 storage system depends on the RAID implementation and physical data drive capacities. The LDEVs are accessed using a combination of logical disk controller number (00-01), CU number (00-FE), and device number (00-FF). All control unit images can support an installed LVI range of 00 to FF.

Logical units

The VSP G1000 storage system is configured with OPEN-V logical unit types. The OPEN-V logical unit can vary in size from 48.1 MB to 4 TB. For information on other logical unit types (e.g., OPEN-9), contact Hitachi Data Systems support.

For maximum flexibility in logical unit configuration, the VSP G1000 provides the VLL features. Using VLL, users can configure multiple logical units under a single LDEV. Using Virtual LVI, users can concatenate multiple logical units into large volumes. For further information on VLL and Virtual LVI, see the *Hitachi Virtual Storage Platform G1000 Performance Guide* and the *Hitachi Virtual Storage Platform G1000 Provisioning Guide for Open Systems*.

Mainframe operations

This section provides high-level descriptions of mainframe compatibility, support, and configuration.

Mainframe compatibility and functionality

In addition to full System-Managed Storage (SMS) compatibility, the VSP G1000 storage system provides the following functions and support in the mainframe environment:

- Sequential data striping

- Cache fast write (CFW) and DASD fast write (DFW)
- Enhanced dynamic cache management
- Extended count key data (ECKD) commands
- Multiple Allegiance
- Concurrent Copy (CC)
- Peer-to-Peer Remote Copy (PPRC)
- Compatible FlashCopy® V2
- Parallel Access Volume (PAV)
- Enhanced CCW
- Priority I/O queuing
- Red Hat Linux for IBM S/390 and zSeries

Mainframe operating system support

The VSP G1000 storage system supports most major IBM Mainframe operating systems. For more information about supported operating systems, go to the mainframe support matrix on <http://www.hds.com/products/interoperability/index.html>

Mainframe configuration

After a VSP G1000 storage system has been installed, users can configure the storage system for mainframe operations.

See the following user documents for information and instructions on configuring your VSP G1000 storage system for mainframe operations:

- The *Mainframe Host Attachment and Operations Guide*, describes and provides instructions for configuring the VSP G1000 for mainframe operations, including FICON attachment, hardware definition, cache operations, and device operations.
For detailed information on FICON connectivity, FICON/Open intermix configurations, and supported HBAs, switches, and directors for VSP G1000, please contact Hitachi Data Systems support.
- The *Hitachi Command Suite Installation and Configuration Guide* or *Hitachi Virtual Storage Platform G1000 System Administrator Guide* provides instructions for installing, configuring, and using Device Manager - Storage Navigator to perform resource and data management operations on the VSP G1000 storage systems.
- The *Hitachi Virtual Storage Platform G1000 Provisioning Guide for Mainframe Systems* and *Hitachi Volume Shredder User Guide*, provide instructions for converting single volumes (LVIs) into multiple smaller volumes to improve data access performance.

Systems operations

This section provides high-level descriptions of VSP G1000 systems compatibility, support, and configuration.

Compatibility and functionality

The VSP G1000 storage system supports and offers many features and functions for the open-systems environment, including:

- Multi-initiator I/O configurations in which multiple host systems are attached to the same Fibre Channel interface
- Fibre Channel Arbitrated Loop (FC-AL) and fabric topologies, supported on ports up to 16 Gbps
- Command tag queuing
- Industry-standard failover and logical volume management software
- SNMP remote storage system management

The global cache feature in VSP G1000 enables any Fibre Channel port to have access to any logical unit in the storage system. In the VSP G1000, each logical unit can be assigned to multiple Fibre Channel ports to provide I/O path failover and/or load balancing (with the appropriate middleware support, such as HGLM) without sacrificing cache coherency.

Users should plan for path failover (alternate pathing) to ensure the highest data availability. The logical units can be mapped for access from multiple ports and/or multiple target IDs. The number of connected hosts is limited only by the number of FC ports installed and the requirement for alternate pathing within each host. If possible, the primary path and alternate paths should be attached to different channel cards.

Systems host platform support

The VSP G1000 supports most major open-system operating systems, such as Microsoft Windows, Oracle Solaris, IBM AIX, Linux, HP-UX, and VMware. For more complete information on the supported operating systems, go to: <http://www.hds.com/products/interoperability/index.html>. The supported platforms are documented in the *Open-Systems Host Attachment Guide*.

For a complete list of VSP G1000 user guides, including the host configuration guides, see the *Hitachi Virtual Storage Platform G1000 Product Overview*.

System configuration

After physical installation of the VSP G1000 has been completed, users can configure the storage system for open-systems operations with assistance as needed from a Hitachi Data Systems representative.

Please refer to the following documents for information and instructions on configuring your VSP G1000 storage system for open-systems operations:

- The host attachment guide provides information and instructions to configure the VSP G1000 storage system and data storage devices for attachment to the open-systems hosts.



Note: Queue depth and other parameters may need to be adjusted for the storage system. See the host attachment guide for queue depth and other requirements.

- The *Hitachi Command Suite Installation and Configuration Guide* or the *Hitachi Virtual Storage Platform G1000 System Administrator Guide* provides instructions for installing, configuring, and using Device Manager - Storage Navigator to perform resource and data management operations on the VSP G1000.
- The *Hitachi Virtual Storage Platform G1000 Provisioning Guide for Open Systems* describes and provides instructions for configuring the VSP G1000 for host operations, including FC port configuration, LUN mapping, host groups, host modes and host mode options, and LUN security. Each Fibre Channel port on the VSP G1000 provides addressing capabilities for up to 2,048 LUNs across as many as 255 host groups, each with its own LUN 0, host mode, and host mode options. Multiple host groups are supported using LUN security.
- The *Hitachi SNMP Agent User Guide* describes the SNMP API interface for the VSP G1000 storage systems and provides instructions for configuring and performing SNMP operations.
- The *Hitachi Virtual Storage Platform G1000 Provisioning Guide for Open Systems* and *Hitachi Volume Shredder User Guide* provide instructions for configuring multiple custom volumes (logical units) under single LDEVs on the VSP G1000. The *Hitachi Virtual Storage Platform G1000 Provisioning Guide for Open Systems* also provides instructions for configuring size-expanded logical units by concatenating multiple logical units to form individual large logical units.

Host modes and host mode options

VSP G1000 supports connection of multiple server hosts of different platforms to each of its ports. When your system is configured, the hosts connected to each port are grouped by host group or by target. For example, if Solaris and Windows hosts are connected to separate Fibre Channel ports, or through a switch to a single Fibre Channel port, a host group is created for the Solaris hosts and another host group is created for the Windows hosts. The appropriate host mode and host mode options are assigned to each host group. The host modes and host mode options provide enhanced compatibility with supported platforms and environments.

The host groups, host modes, and host mode options are configured using the LUN Manager software on Device Manager - Storage Navigator. For further information on host groups, host modes, and host mode options, refer to the *Hitachi Virtual Storage Platform G1000 Provisioning Guide for Open Systems*.

Device Manager - Storage Navigator

Device Manager - Storage Navigator is the GUI that accesses the features in the firmware and is used to set up and monitor the storage system. It can be installed on a PC, laptop, or workstation. It communicates via a LAN to the SVP in the VSP G1000 storage system. The SVP obtains storage system configuration and status information and sends user-initiated commands to the storage system. The Device Manager - Storage Navigator displays detailed storage system information and allows users to configure and perform storage operations on the system.

Device Manager - Storage Navigator is provided as a Java[®] applet program that can be executed on any machine that supports a Java Virtual Machine (JVM). A PC hosting the Device Manager - Storage Navigator software is called a remote console. Each time a remote console accesses and logs into the SVP of the desired storage system, the Device Manager - Storage Navigator applet is downloaded from the SVP to the remote console. The following figure illustrates remote console and SVP configuration for Device Manager - Storage Navigator.

For further information about Device Manager - Storage Navigator, see the *Hitachi Command Suite Installation and Configuration Guide* or the *Hitachi Virtual Storage Platform G1000 System Administrator Guide*.

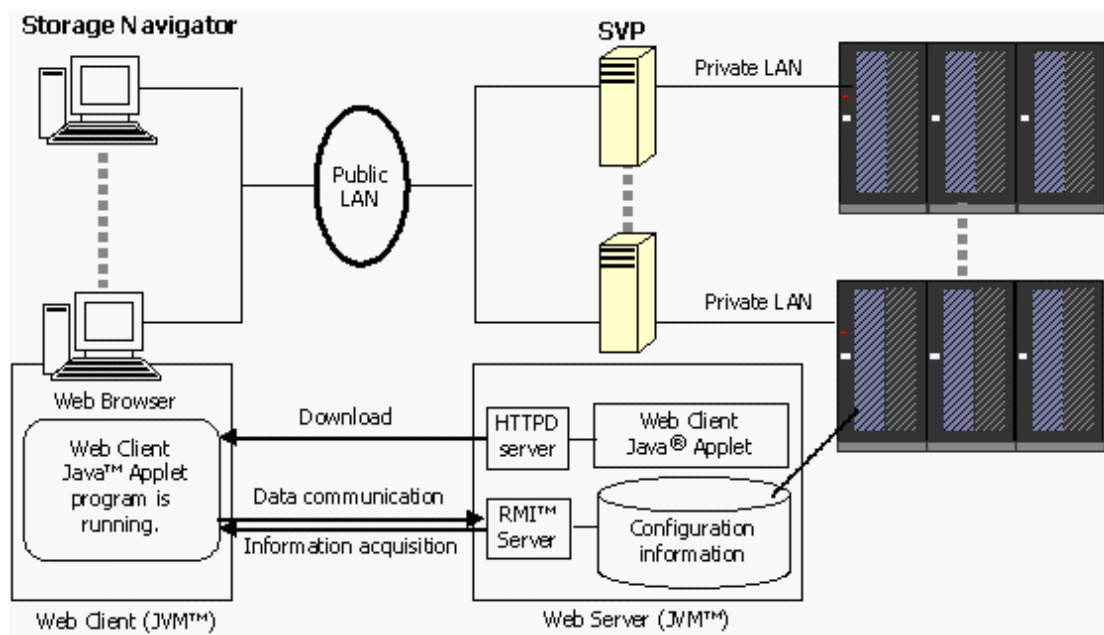


Figure 14 Device Manager - Storage Navigator and SVP Configuration

Safety requirements

Install Hitachi equipment in accordance with the local safety codes and regulations that apply to the facility. This chapter contains additional safety information that may apply to your facility. Read and follow the safety guidelines in this chapter before installing the equipment. The key sections in this chapter are:

- ☐ [General safety guidelines](#)
- ☐ [Work safety guidelines](#)

General safety guidelines

Observe the following general site guidelines:

- **General requirements:** The data center must comply with all applicable safety regulations, standards, and requirements for installing and operating industrial computer equipment similar to a VSP G1000 storage system.
- **Fire protection:** The data center must have an operational fire protection system appropriate for use with computer and electrical equipment.
- **Hazards:** The data center must be free of hazards (for example, cables on the floor that block access or that can cause people to trip).
- **Equipment modifications:** Do not make mechanical or electrical modifications to the equipment. Hitachi Data Systems is not responsible for regulatory compliance of a modified Hitachi Data Systems product.
- **Earthquake Safety:** To minimize personal injury in the event of an earthquake, securely fasten the control and drive chassis to a rigid structure extending from the floor to the ceiling or from the walls of the room in which the system is located.
- **Cabling:** Do not block walkways when routing cables. Do not place heavy materials on cables. Do not place cables near any possible source of heat.
- **Warning and safety labels:** Safety warnings, cautions, and instructions in various languages are attached to the VSP G1000 storage system components. The safety warnings provide guidelines to follow when working with any equipment. Before working on the storage system, read all safety and warning labels attached to it. If the labels become dirty, damaged, unreadable, or peel off, contact the Hitachi Data Systems support center.
- **Authorized personnel:** Allow only qualified and authorized personnel (for example, a certified electrician) to perform hazardous tasks.

Work safety guidelines

Observe the following site guidelines:

- Do not wear loose clothing that could get caught in the equipment or mounting hardware. Fasten your tie or scarf and roll up your sleeves.
- Wear safety glasses when working under conditions that are hazardous to your eyes.
- Do not perform any action that creates a potential hazard to people or makes the equipment or rack unsafe.
- Keep walkways clear of tools, power cables, and parts to prevent them from being stepped on or causing people to trip and fall over them.
- Do not work on the equipment or disconnect cables during a thunderstorm, when wearing a wool sweater or other heavy wool clothing, or when power is applied.

- Keep floors dry to prevent slips and falls.
- Do not use ungrounded power cables.
- Keep the area clear and dust-free during and after installation.
- Do not block or cover equipment openings. Ensure that all equipment has adequate airflow. Failure to follow these guidelines can cause overheating and affect the system reliability.
- If you notice unusual heat generation, odors, or smoke emission, shut off the power feed to the equipment and contact a maintenance engineer. Leaving such conditions unattended may result in hazardous physical conditions and equipment failure.
- The rack is equipped with casters so that it can be moved short distances to position it for final installation. Use enough personnel (minimum of two) when moving a rack, especially on sloping loading docks and ramps to a raised computer room floor. Move the cabinet slowly and deliberately, and make sure that the floor is free from foreign objects and cables that the cabinet could roll over.



Warning: To avoid injury, wear protective footwear when moving equipment.

Warning about moving parts

Even though customers do not install or maintain equipment, these guidelines are provided to prevent possible injury when working with authorized service personnel. Observe the following warning related to moving parts:

- Tuck in any loose clothing so that it cannot be caught by a moving or rotating part such as a fan.
- Tie up long hair.
- Unless otherwise specifically instructed, do not supply power to any device that contains rotating or moving parts that are not properly covered.

Electrical safety guidelines

Even though customers do not install or maintain equipment, these guidelines are provided to prevent possible injury when working with authorized service personnel in the area where equipment is installed. Observe the following electrical safety guidelines:

- Disconnect all power before installation, deinstallation, or moving equipment.
- Ensure that the voltage and frequency of your power source match the voltage and frequency required by the system.
- All equipment should be properly grounded for proper operation and safety. To reduce the risk of electric shock or damage to equipment, follow proper grounding procedures.

Preventing electric shock

- Before starting work, note where the emergency power-off switches are located, and be sure you know how to operate them.
- Before starting work, be sure there are no potential electric hazards in the maintenance area such as insufficient grounding or a wet floor.

Site preparation

This chapter provides site and system requirements and specifications that are needed to plan a Hitachi Virtual Storage Platform G1000 storage system installation so that the equipment installation is efficient and trouble-free. This chapter may not provide all the information needed for every installation. The installation and maintenance documents used by Hitachi Data Systems personnel contain complete information, including specifications for all possible installations. Contact Hitachi Data Systems Support Center if you need information that is not included in this chapter.

- ☐ [Safety requirements](#)
- ☐ [Responsibilities](#)
- ☐ [Site preparation checklist](#)
- ☐ [General site requirements](#)
- ☐ [Data center requirements](#)
- ☐ [Operational requirements](#)
- ☐ [System specifications and requirements](#)
- ☐ [Power connection diagrams](#)
- ☐ [Data connection diagrams](#)
- ☐ [Long cable connections](#)
- ☐ [Port configurations](#)
- ☐ [Service clearance, floor cutout, and floor load rating](#)

Safety requirements



Caution: Before operating or working on the VSP G1000 storage system, read the safety and environmental information in [Safety requirements on page 65](#).

Responsibilities

The responsibilities for site planning and preparation are shared by the system users and Hitachi Data Systems support. The required installation planning tasks must be scheduled and completed to ensure successful and efficient installation of the VSP G1000 storage system.



Note: The VSP G1000 storage system must be installed by trained Hitachi Data Systems personnel or trained authorized service providers. The VSP G1000 storage system is not a customer-installable product.

User responsibilities

You are responsible for performing the following tasks to prepare your site for installation of the VSP G1000 storage system.

- Understand the applicable safety requirements associated with installing a VSP G1000 storage system.
- Understand the installation requirements for the VSP G1000 storage system. You can use the information in this manual to determine the specific requirements for your installation. As needed, review the *Hitachi Virtual Storage Platform G1000 Product Overview Guide* to familiarize yourself with the components, features, and functions of the VSP G1000 storage system.
- Verify that the installation site meets all installation requirements. A checklist is included in this section to help you with this task.
- Provide electrical hardware, including cables, connectors and receptacles that are required to connect the VSP G1000 storage system to site power.
- As needed, work with Hitachi Data Systems support to create an installation plan. Allow enough time to complete any changes to the plan, so your site is ready when the equipment arrives.

Hitachi Data Systems responsibilities

Hitachi Data Systems support is responsible for completing the following tasks:

- Assist you as needed during the installation planning process for your specific site and operational configuration

- Coordinate Hitachi Data Systems resources to ensure a successful installation and configuration of the VSP G1000 storage system.

Site preparation checklist

The following checklist can help you ensure that your site meets all requirements to install a VSP G1000 storage system. You can make copies of this checklist for each installation you perform and check each step after it has been performed. Completing this checklist can help ensure smooth and efficient installation of a VSP G1000 storage system.

Definition of terms

Equipment

The hardware delivered to the customer site that includes the VSP G1000 storage system components. The system may be installed in a Hitachi rack when delivered or assembled on site. The delivered equipment may include only the system components if the customer supplies a standard 19-inch rack. Rack specifications are contained in the *Hitachi Universal V2 Rack Reference Guide*, MK-94HM8035.

Location

The specific location in the data center (area or “footprint” on the floor) where the VSP G1000 storage system will be installed.

User Information	
Company	
Address	
Contact	
Phone	
Mobile	
Email	
Contact	
Phone	
Mobile	
Email	
Hitachi Data Systems Information	
Contact	
Phone	
Mobile	
Email	
Contact	
Phone	
Mobile	

User Information	
Email	
Notes	.

Preinstallation Checklist	Yes	No
Safety Requirements See Safety requirements on page 65 .		
Does the data center provide appropriate fire protection for computer equipment similar to VSP G1000 storage systems?		
Is the data center free of hazards such as cables that obstruct access to the equipment?		
Delivery Requirements See General site requirements on page 73		
Is the receiving area adequate for equipment delivery, unloading, and unpacking?		
Are all doors, hallways, elevators, and ramps wide enough and high enough to allow the equipment to be moved from the receiving area to the installation area?		
Can the floors, elevators, and ramps support the weight of the equipment? See General site requirements on page 73 .		
Storage Requirements See System storage requirements on page 74 .		
If the equipment will be stored after delivery and prior to installation, does the storage location meet the environmental requirements for storing a VSP G1000 storage system?		
Facilities Requirements See Data center requirements on page 74 .		
Does the data center have a raised floor?		
Does the location meet the requirements for service clearance and cable routing (for example, floor cutouts)? See Equipment clearances on page 73 .		
Does the installation site meet the floor load rating requirements?		
Power Requirements See Electrical specifications on page 77 .		
Does the data center meet the AC input power requirements? See Electrical specifications on page 77 , Power connection on page 78 , and Electrical specifications on page 139 .		
Does the data center meet the circuit breaker and plug requirements? See Data center requirements on page 74 .		
Is the customer-supplied hardware such as connectors, receptacles, and cables ready for the installation?		
Environmental Requirements See general Environmental specifications on page 79 and detailed Environmental specifications on page 141 .		

Preinstallation Checklist		Yes	No
Does the data center meet the following operational environmental requirements for a VSP G1000 storage system?			
	Temperature		
	Humidity		
	Altitude		
	Air flow		
Does the data center provide adequate protection for a VSP G1000 storage system from the following?			
	Electrostatic discharge		
	Electrical/radio frequency interference		
	Dust, pollution, and particulate contamination		
Does the data center provide adequate acoustic insulation to operate the VSP G1000 storage system?			
Operational Requirements See Operational requirements on page 75 .			
Does the data center provide a LAN for Device Manager - Storage Navigator?			
Does the location meet the cable length requirements for the front-end directors?			
Does the location meet the requirements for attaching external storage?			

General site requirements

The customer site must accommodate the delivery and movement of the equipment from the receiving dock to the installation location in the data center.

Equipment clearances

Receiving area

The receiving dock, storage area, and receiving area must be large enough to allow movement of and access to crated or packed equipment.

Other areas

The hallways, doorways, ramps, and elevators must be large enough to allow a single unpacked rack to be moved to the installation location. Unless the distance between the receiving dock and the data center is very long, VSP G1000 storage systems are typically unpacked in the receiving area and the individual racks with pre-installed equipment are rolled on their casters to the data center. For information about rack dimensions, refer to the *Hitachi Universal V2 Rack Reference Guide*, MK-94HM8035.

Equipment weight

The floors, elevators, and ramps must be able to support the weight of the delivered equipment as it is moved to the installation location. Spreader plates may be required to distribute the load and protect the floor as the equipment is moved from the receiving area to the installation location. Consult the system bill of materials to establish the approximate weight of the equipment. See the next paragraph for information about calculating the exact weight of the equipment.

The weight for a fully configured 2-controller, 6-rack storage system can reach 6,146 pounds / 2,917 kilograms. The exact weight of the equipment depends on the storage system configuration. The following table provides weights of typical system configurations.



Note: The data in the following table was taken from measurements of a system in a controlled environment. To calculate the power draw, current draw, and heat output of a specific system, see [Component weight heat airflow and power consumption on page 80](#) or (easier) use the power and weight calculator at the following URL: <http://www.hds.com/go/weight-and-power-calculator>.

Contact technical support if you need assistance using this tool.

System storage requirements

If the equipment must be stored after delivery and prior to installation, the storage location must meet the storage environmental requirements for the VSP G1000 storage system. See [Table 16 VSP G1000 environmental specifications on page 79](#) in this chapter for specifications.

Data center requirements

The data center must meet the following general requirements. Detailed mechanical, electrical, and environmental requirements are listed in the tables in the next section.

Table 11 Data center requirements

Item	Description
General	The data center must provide appropriate power, air conditioning, cabling, and fire protection.
Temperature	The data center must maintain ambient temperature from 50° F (10°C) to 95° F (35°C).
Humidity	The data center must maintain ambient humidity from 20% to 80%, non-condensing.

Item	Description
ESD	The data center must provide adequate protection from electrostatic discharge (ESD).
Electrical interference	The data center must provide adequate protection from electrical/radio frequency interference.
Contamination	The data center must provide adequate protection from dust, pollution, and particulate contamination.
Acoustics	The data center must provide adequate acoustic insulation for operating the system.
User-supplied hardware	This includes cables, connectors, and power receptacles that must be available and ready when the system is installed.
User-supplied software	This includes VSP G1000 supported operating systems on the host and system management console

Operational requirements

The operational requirements for the VSP G1000 include:

- LAN for Device Manager - Storage Navigator
Device Manager - Storage Navigator communicates with the VSP G1000 storage system over a LAN to obtain system configuration and status information and send user commands to the storage system. Device Manager - Storage Navigator serves as the integrated interface for all resource manager components.
- Cable length for front-end directors
The following table lists the cable length requirements for the front-end directors in the VSP G1000 storage system.

Table 12 Maximum cable length (short wave)

DataTransf erRate	OM2(50/125 f/m multi-mode fiber)	OM3(50/125 f/m laser optimizedmulti-mode fiber)	OM4(50/125 f/m laser optimizedmulti-mode fiber)
MB/s	feet / meters	feet / meters	feet / meters
200	984.3 / 300	1640.4 / 500	-
400	492.1 / 150	1246.7 / 380	1312.4 / 400
800	164 / 50	492.1 / 150	623.4 / 190
1600	118 / 36	328 / 100	410.1 / 125

- External data storage
If you plan to attach external storage to the VSP G1000 storage system, be sure to include the appropriate power and space requirements in your planning.

System specifications and requirements

This section describes the characteristics of a VSP G1000 storage system, including

- [Mechanical specifications on page 76](#)
- [Electrical specifications on page 77](#)
- [Environmental specifications on page 79](#)

Mechanical specifications

Basic system dimensions and main components of the VSP G1000 storage system components are shown in the following illustration. Detailed specifications follow the illustrations.

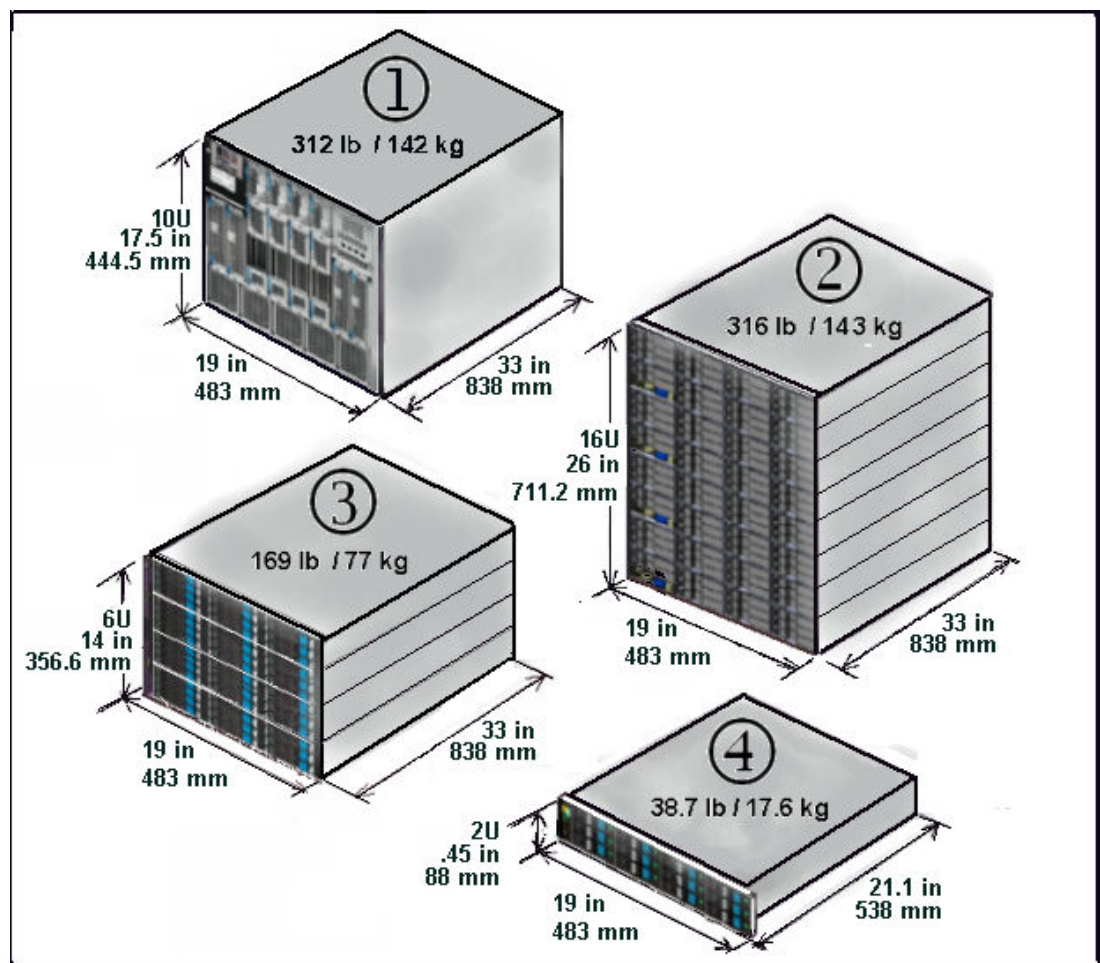


Table 13 VSP G1000 components

Item	Description
1	Controller Chassis
2	SFF and LFF Drive chassis
3	FMD drive chassis
4	2U SFF, LFF, and FMD drive tray

Table 14 VSP G1000 system dimensions

Number of racks	Width (in / mm)	Depth (in / mm)	Height (in / mm)
1	23.5 / 600	47.25 / 1200	79.1 / 2010
2	47 / 1200	47.25 / 1200	79.1 / 2010
3	117.5 / 3000	47.25 / 1200	79.1 / 2010
4	94 / 2400	47.25 / 1200	79.1 / 2010
5	117.5 / 3000	47.25 / 1200	79.1 / 2010
6	141.0 / 3600	47.25 / 1200	79.1 / 2010

Electrical specifications



Note: The current and power specifications in the following tables were measured on a VSP G1000 system in a controlled environment. To calculate the power draw, current draw, and heat output of a specific system, see [Table 17 VSP G1000 component specifications on page 80](#) or (easier) use the Power and Weight calculator at the following URL.

<http://www.hds.com/go/weight-and-power-calculator/>

Contact technical support if you need assistance using this tool.

The following table lists the electric power requirements of a typical VSP G1000 storage system. Detailed electrical specifications are located in [Specifications on page 133](#). For detailed voltage and power requirements, see [Electrical specifications on page 139](#). For system input power requirements, see [PDU plugs, circuit breakers, and receptacles on page 78](#).

Table 15 VSP G1000 electric power requirements

Phase	Voltage	Frequency
AC, single phase	200 V -8% min 240 V +6% max	50 ±3 Hz
2 wire + ground		60 ±2 Hz
AC, three phase delta	208 V	50/60 Hz

Phase	Voltage	Frequency
	+5/-15%	

Grounding

The site and site equipment must meet all of the following three grounding requirements.

- An insulated grounding conductor that is identical in size and insulation material and thickness to the grounded and ungrounded branch-circuit supply conductors. It must be green, with or without yellow stripes, and must be installed as a part of the branch circuit that supplies the unit or system.
- The grounding conductor described above should be connected to earth ground at the service equipment or other acceptable building earth ground. In the case of a high rise steel-frame structure, this can be the steel frame
- The receptacles in the vicinity of the unit or system must include a ground connection. The grounding conductors serving these receptacles must be connected to earth ground at the service equipment or other acceptable building earth ground.

Power connection

The AC power input for the VSP G1000 storage system has a duplex PDU structure that enables the equipment installed in the entire rack to remain powered on if power is removed from one of the two power distribution panels.

For more information, see [Electrical specifications on page 139](#).



Note: Site power can be connected to the PDUs at either the top or bottom of the racks.

PDU plugs, circuit breakers, and receptacles

The PDU plugs must be appropriate for the power sources at the installation sites. The table below lists the plugs on the end of the PDU power cords. The power distribution panel at the installation site must have receptacles that match these plugs.

Required number of plugs in each PDU per chassis:

- Controller chassis: 4.
- Drive chassis:
 - SFF: 16
 - LFF: 16
 - FMD: 8

Required number of PDUs per rack:

- Controller rack
 - Single phase: 4
 - Three phase: 2
- Drive rack:
 - Single phase: 4
 - Three phase: 2

Environmental specifications

[Table 16 VSP G1000 environmental specifications on page 79](#) provides the environmental specifications and requirements for the VSP G1000 storage system.

Table 16 VSP G1000 environmental specifications

Item	Operating ¹	Not Operating ²	Shipping & Storage ³
Standard Temperature (°F / °C)	61 to 90 / 16 to 32	-18 to 122 -10 to 35	-45 to 110 / -25 to 60
high temperature mode (°F / °C)	60.8 to 104 / 16 to 40		
Relative Humidity (%) ⁴	20 to 80	8 to 90	5 to 95
Max. Wet Bulb (°F / °C)	78.8 / 26	80.6 / 27	84.2 / 29
Temperature deviation per hour (°F / °C)	50 / 10	50 / 10	68 / 20
Vibration ⁶	5 to 10Hz: 0.25 mm10 to 300Hz: 0.49m/s2	5 to 10Hz: 2.5mm10 to 70Hz: 4.9m/s270 to 99Hz: 0.05mm99 to 300Hz: 9.8m/s2	Sine Vibration: 4.9m/s2, 5min.At the resonant frequency with the highest displacement found between 3 to 100Hz ⁷
			Random Vibration: 0.147m2/s3, 30min, 5 to 100Hz ⁷
Shock	No impact	78.4m/s ² (8.0G) 15ms	Horizontal: Incline Impact 1.22m/s ⁸
			Vertical: Rotational Edge 0.15m ¹⁰
Dust	Less than 0.15mg per cubic meter of air	-	-
Altitude	-60 m to 3,000 m		-
Notes:			
1. Environmental specification for operation should be met before the storage system is powered on. Maximum temperature of 90°F / 32°C should be strictly met at air system air inlet.			
2. Non-operating condition includes both packing and unpacking conditions unless otherwise specified.			
3. The system and components should be packed in factory packing for shipping and storing.			
4. No condensation in and around the drive should be observed under any conditions.			
5. The vibration specifications are applied to all three axes			

Item	Operating ¹	Not Operating ²	Shipping & Storage ³
6.	See ASTM D999-01 The Methods for Vibration Testing of Shipping Containers.		
7.	See ASTM D4728-01 Test Method for Random Vibration Testing of Shipping Containers.		
8.	See ASTM D5277-92 Test Method for Performing Programmed Horizontal Impacts Using an Inclined Impact Tester.		
9.	See ASTM D6055-96 Test Methods for Mechanical Handling of Unitized Loads and Large Shipping Cases and Crates.		
10.	When FMDs (DKC-F810I-1R6FM/3R2FM) are installed.		

Component weight, heat, airflow, and power consumption

The following table provides physical specifications of the individual VSP G1000 components.

Table 17 VSP G1000 component specifications

Component Name	Component Model No.	Weight (lb/Kg)	Power Consumption (VA)	Heat Output	Airflow (m ³ /sec)
Primary controller	DKC810I-CBXA DKC810I-CBXAC ⁴	312 / 142	483 ¹	508 ¹	16.7(32°C) 25.9(40°C)
Secondary controller	DKC-F810I-CBXB	308 / 140	413 ¹	435 ¹	16.7(32°C) 25.9(40°C)
SFF drive chassis	DKC-F810I-SBX DKC-F810I-SBXC ⁴	315 / 143	640 ¹	674 ¹	9.4(32°C) 11.4(40°C)
LFF drive chassis	DKC-F810I-UBX DKC-F810I-UBXC ⁴	299 / 136	640 ¹	674 ¹	6.2(32°C) 8.3(40°C)
FMD drive chassis	DKC-F810I-FBX	169 / 77	600 ¹	640 ¹	8.4
Service Processor	DKC-F810I-SVP DKC-F810I-SVPC ⁴	8.8 / 4.0	75	Included in controller chassis specs	
Hub	DKC-F810I-HUB	5.1 / 2.3	10		
Virtual storage director pair (processor blades)	DKC-F810I-MP	6.0 / 2.7	170		
Cache path control adapter	DKC-F810I-CPEX	6.2 / 2.8	80		
Cache module (16GB)	DKC-F810I-CM16G	0.022	4		
Cache module (32GB)	DKC-F810I-CM32G	0.054	7		
Small memory backup kit	DKC-F810I-BKMS	4.2 / 1.9	40 ²		
Large memory backup kit	DKC-F810I-BKML	4 / 1.8	50 ²		
Cache flash memory (SSD) (128GB)	DKC-F810I-BMM128	0.08	4 ³		
Cache flash memory (SSD) (256GB)	DKC-F810I-BMM256	0.07	4 ³		
300GB, 15K rpm SAS SFF disk drive	DKC-F810I-300KCM DKC-F810I-300KCMC ⁴	0.66 / 0.3	8.6 ⁴	Included in drive chassis specs	

Component Name	Component Model No.	Weight (lb/Kg)	Power Consumption (VA)	Heat Output	Airflow (m ³ /sec)
600GB, 15K rpm SAS SFF disk drive	DKC-F810I-600KGM	0.66 / 0.3	8.5 ⁴		
600GB, 10K rpm SAS SFF disk drive	DKC-F810I-600JCM DKC-F810I-600JCMC ⁴	0.66 / 0.3	8.0 ⁴		
900GB, 10K rpm SAS SFF disk drive	DKC-F810I-900JCM DKC-F810I-900JCMC ⁴	0.66 / 0.3	9.0 ⁴		
1.2TB, 10K rpm SAS SFF disk drive	DKC-F810I-1R2JCM DKC-F810I-1R2JCMC ⁴	0.66/0.3	8.7 ⁴		
1.8TB, 10K rpm SFF	DKC-F810I-1R8JGM	0.3	8.5 ⁴		
4TB, 7.2K rpm SAS LFF disk drive	DKC-F810I-4R0H3M DKC-F810I-4R0H3MC ⁴	0.83 / 0.83	14.8 ⁴		
600GB, 10K rpm disk drive in LFF canister	DKC-F810I-600J5M DKC-F810I-600J5MC ⁴	0.66/0.3	14.8 ⁴		
6TB, 7.2K rpm SAS LFF disk drive	DKC-F810I-6R0H9M ⁴	1.9/0.86	14.8 ⁴		
400GB MLC SSD in LFF canister	DKC-F810I-400M5M	0.66/0.3	7.1 ⁴		
400GB SFF MLC SSD	DKC-F810I-400MCM	0.29 / 0.13	6.7 ⁴		
800GB SFF MLC SSD	DKC-F810I-800MCM	0.29 / 0.13	6.7 ⁴		
Hitachi Accelerated Flash 1.6TB flash module drive	DKC-F810I-1R6FM	3.08 / 1.4	17.0 ⁴		
Hitachi Accelerated Flash 3.2TB flash module drive	DKC-F810I-3R2FM	3.08 / 1.4	18.0 ⁴		
Hitachi Accelerated Flash DC2 1.6TB flash module drive	DKC-F810I-1R6FN	3.08 / 1.4	24.0 ⁴		
Hitachi Accelerated Flash DC2 3.2TB flash module drive	DKC-F810I-3R2FN	3.08 / 1.4	24.0 ⁴		
Hitachi Accelerated Flash DC2 6.4TB flash module drive	DKC-F810I-6R4FN	3.08 / 1.4	24.0 ⁴		
Back-end director(disk adapter)	DKC-F810I-SCA	4.2 / 1.9	100	105	
Encrypting Back-end director	DKC-F810I-ESCA	3.3 / 2.0	110	105	
Fibre 16-port 16G front-end director	DKC-F810I-16FC16	4.6 / 2.1	116	110	
Fibre 16-port 8G front-end director	DKC-F810I-16FC8	3.3 / 2.0	116	110	
Fibre 8-port 16G front-end director	DKC-F810I-8FC16	5.3 / 2.4	116	110	

Component Name	Component Model No.	Weight (lb/Kg)	Power Consumption (VA)	Heat Output	Airflow (m ³ /sec)
Fibre Channel over Ethernet (FCoE) front-end director	DKC-F810I-16FE10	4.8 / 2.1	179	170	
Mainframe Fibre 16-port 8G front-end director for Shortwave	DKC-F810I-16MS8	5.3 / 2.4	120	126	
Mainframe Fibre 16-port 16G front-end director for Shortwave	DKC-F810I-16MS16	5.3 / 2.4	130	137	
Mainframe Fibre 16-port 8G front-end director for Longwave	DKC-F810I-16ML8	5.3 / 2.4	120	126	
Mainframe Fibre 16-port 16G front-end director for Longwave	DKC-F810I-16ML16	5.3 / 2.4	130	137	
SFP for 8Gbps Longwave	DKC-F810I-1PL8	0.02	—		
SFP for 8Gbps Shortwave	DKC-F810I-1PS8	0.02	—		
SFP for 16Gbps Longwave	DKC-F810I-1PL16	0.02	—		
SFP for 16Gbps Shortwave	DKC-F810I-1PS16	0.02	—		
PDU 30A - single phase (Americas)	PDU-121112F10	10 / 4.5 kg	.	.	.
PDU 32 A - single phase (EMEA/APAC)	A3CR-123294-51	6 / 2.6	.	.	.
PDU 30A - three phase (Americas)	PDU-32C13800F10	18 / 8.0	.	.	.
PDU 32A - three phase (EMEA/APAC)	A3CK-243694-50	11 / 5.2	.	.	.
Controller chassis bezel	DKC-F810I-BCH	8.2 / 3.7	—	—	—
Drive chassis bezel	DKC-F810I-BUH	8.2 / 5.3	—	—	—
Flash module chassis bezel	DKC-F810I-BFH	6.2 / 2.8	—	—	—
Hitachi Universal "V2" Rack	A3BF-600-1200-V2	222 / 101	—	—	—
Controller Rail Kit	A34V-700-800-CBX	7.4 / 3.4	—	—	—
Corner Guide Rail Kit (FBX)	A3BF-HK-GL-740-1	4.4 / 2	—	—	—
Corner Guide Rail Kit (SFF / LFF)	A3BF-HK-GL-740-1	4.4 / 2	—	—	—
Front Door	A3BF-DR-R800	50.6 / 23	—	—	—
Left side panel with Hitachi branding	A3BF-Z-PAN-BR-L	39.6 / 18	—	—	—
Right side panel w/ Hitachi branding	A3BF-Z-PAN-BR-R	39.6 / 18	—	—	—
Universal Rail Kit	A34V-600-850-UNI	6.2 / 2,8			
Power Cord Kit, CBX chassis, USA	DKC-F810I-PLUC	9.9 / 4.5	—	—	—

Component Name	Component Model No.	Weight (lb/Kg)	Power Consumption (VA)	Heat Output	Airflow (m ³ /sec)
Power Cord Kit, SFF / LFF drive chassis, USA	DKC-F810I-PHUC	9.9 / 4.5	—	—	—
Power Cord Kit, FMD drive chassis, USA	DKC-F810I-PFUC	4.4 / 2.0	—	—	—
Power Cord Kit, controller chassis, EU	DKC-F810I-PLEC	2 / 0.7	—	—	—
Power Cord Kit, SFF / LFF drive chassis, EU	DKC-F810I-PHEC	6.8 / 3.1	—	—	—
Power Cord Kit, FMD drive chassis, EU	DKC-F810I-PFEC	3.1 / 1.4	—	—	—
Power Cord Kit, controller chassis, China	DKC-F810I-PLCC	1.5 / 0.7	—	—	—
Power Cord Kit, SFF / LFF drive chassis, China	DKC-F810I-PHCC	6.6 / 3.0	—	—	—
Power Cord Kit, FMD drive chassis, China	DKC-F810I-PFCC	2.9 / 1.3	—	—	—
Inter-Controller Connecting Kit, 5 m	DKC-F810I-MOD5	4.4 / 2.0	1	—	—
Inter-Controller Connecting Kit, 30 m	DKC-F810I-MOD30	7.7 / 3.5	1	—	—
Inter-Controller Connecting Kit	DKC-F810I-MOD1J	17.2 / 7.8	1	—	—
Inter-Controller Connecting Kit	DKC-F810I-MFC5	1.75 / 0.8	—	—	—
Inter-Controller Connecting Kit	DKC-F810I-MFC30	5.1 / 2.3	—	—	—
Inter-Controller Connecting Kit, not supported until V01+1.	DKC-F810I-MFC1J	14.3 / 6.5	—	—	—
Device Interface Cable (ENC), 1m	DKC-F810I-CC1	2.4 / 1.1	—	—	—
Device Interface Cable (ENC), 2m	DKC-F810I-CC2	3.75 / 1.7	—	—	—
Device Interface Cable (ENC), 4m	DKC-F810I-CC4	6.4 2.9	—	—	—
Device Interface Cable (ENC), 5m	DKC-F810I-FC5	2.4/1.1	—	—	—
Device Interface Cable (ENC), 30m, not supported until V02	DKC-F810I-FC30	6.6/3.0	—	—	—
Device Interface Cable (ENC), 100m, not supported until V02	DKC-F810I-FC1J	18/8.2	—	—	—
Notes: 1. Maximum values with all fans running at maximum speed. 2. Power is consumed during the battery back-up time only. The idle power is included in DW700-CBX.					

Component Name	Component Model No.	Weight (lb/Kg)	Power Consumption (VA)	Heat Output	Airflow (m ³ /sec)
3. Actual values at a typical I/O condition. (Random Read and Write, 50 IOPSs for HDD, 2500 IOPSs for SSD, Data Length: 8k bytes) These values may increase for future compatible drives.					
4. BNST-free part					

Airflow

The fans in both the control chassis and the drive trays circulate air through the units from front to back. Air flows in through the front bezel to the rear of the component and exits through the perforations in the rear door. The racks do not contain fans.


Equipment noise

The following table lists the maximum acoustic emission values loudness in dB for the VSP G1000 storage system in standard and high-temperature modes.

Operating	CBXA/CBXAC/CBXB	58 dB (24°C or less), 60 dB (32°C), 70 dB (40°C)
	SBX/SBXC/UBX/UBXC/FBX	61 dB (24°C or less), 64 dB (32°C), 70 dB (40°C) * ²
Standby ¹	CBXA/CBXAC/CBXB	58 dB (24°C or less), 60 dB (32°C), 70dB (40°C)
	SBX/SBXC/UBX/UBXC/FBX	61 dB (24°C or less), 64 dB (32°C), 70 dB (40°C) ²
Notes: <ol style="list-style-type: none"> 1. Measurement condition: The point 1m far from floor and surface of the product. 2. The DKC-F810I-1R6FM/3R2FM and DKC-F710I-1R6FM/3R2FM cannot be used at 40°C. 		

Power connection diagrams

The following illustrations show the correct way to connect the power distribution units to the power distribution panels. When connected as shown, the system will operate normally if either of the AC inputs fails. In the following figures, redundancy is provided through separate PDUs. These figures assume that the separate PDUs are attached to independent power sources.

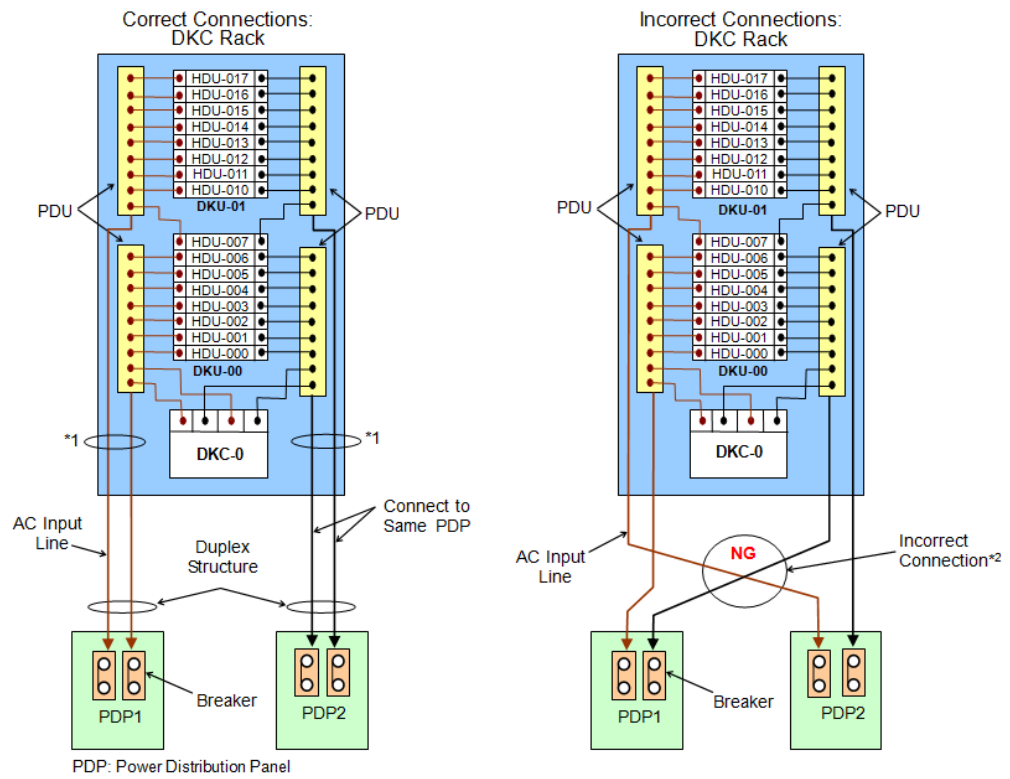

*1: When connected correctly, two of the four PDUs can supply power to the DKC rack.

*2: When connected incorrectly, two PDUs cannot supply power to the DKC rack, which causes a system failure.

Figure 15 Direct power connection

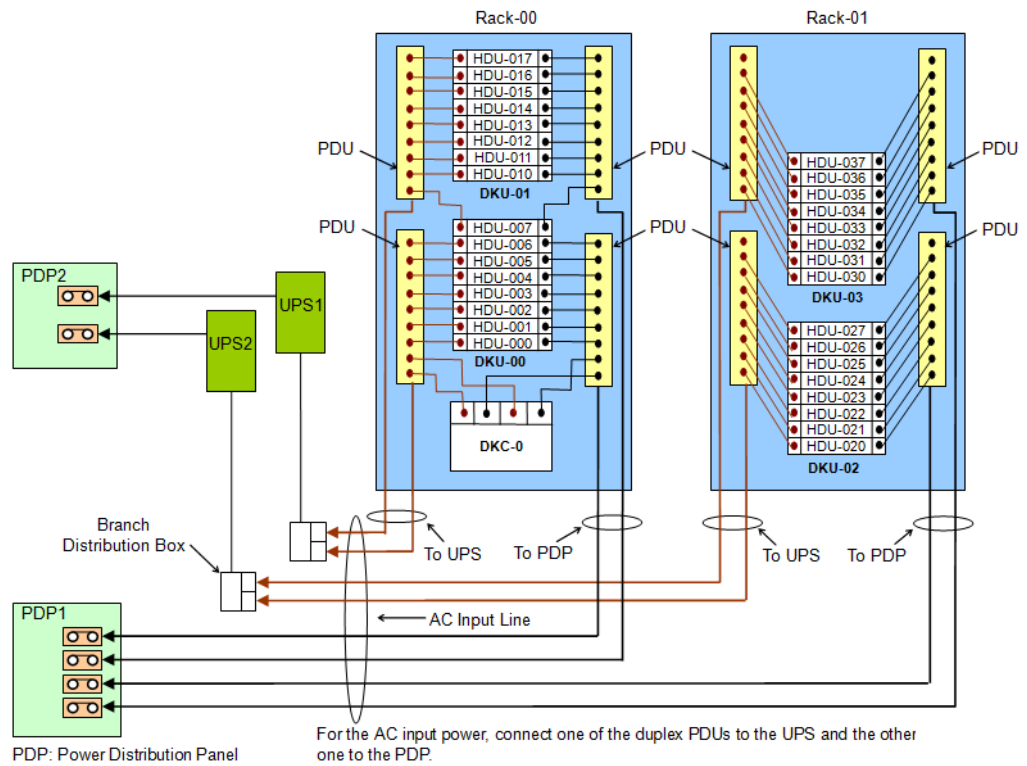


Figure 16 Power connection via UPS



Caution: When installing a system, do not cross-connect the AC cables as shown in the above illustration. Otherwise, a system failure can occur when either of the AC inputs is interrupted.

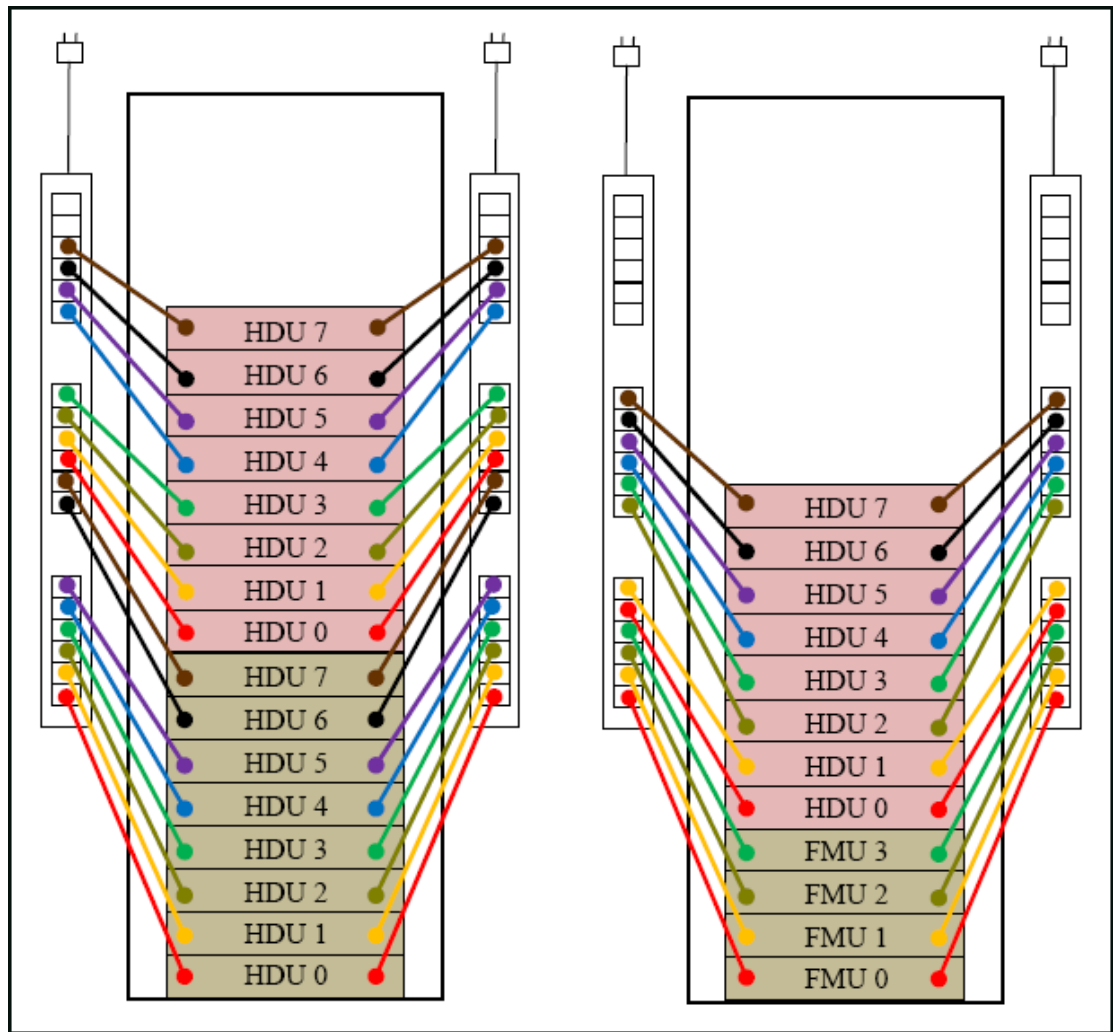


Figure 17 PDP breaker connections for the controller rack, three phase

UPS power connection

The following illustrations show the correct way to connect the PDUs to the PDP when an uninterruptible power supply is used.

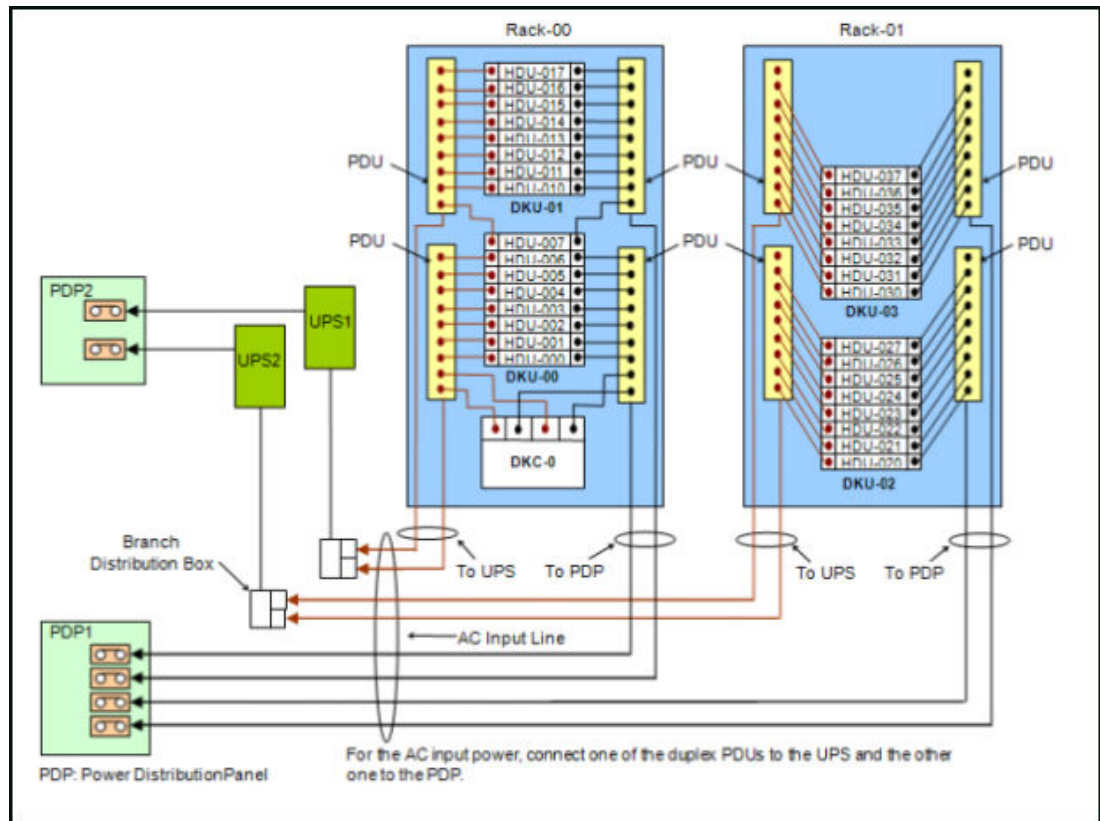


Figure 18 Breaker configurations when using a UPS

Data connection diagrams

This section provides basic cabling diagrams for connecting ENC (data and control) cables between the control chassis and the drive chassis in the block module, and between the controller and HNAs storage in the file module.

The following illustrations show the correct way to connect the drive chassis to the controller.

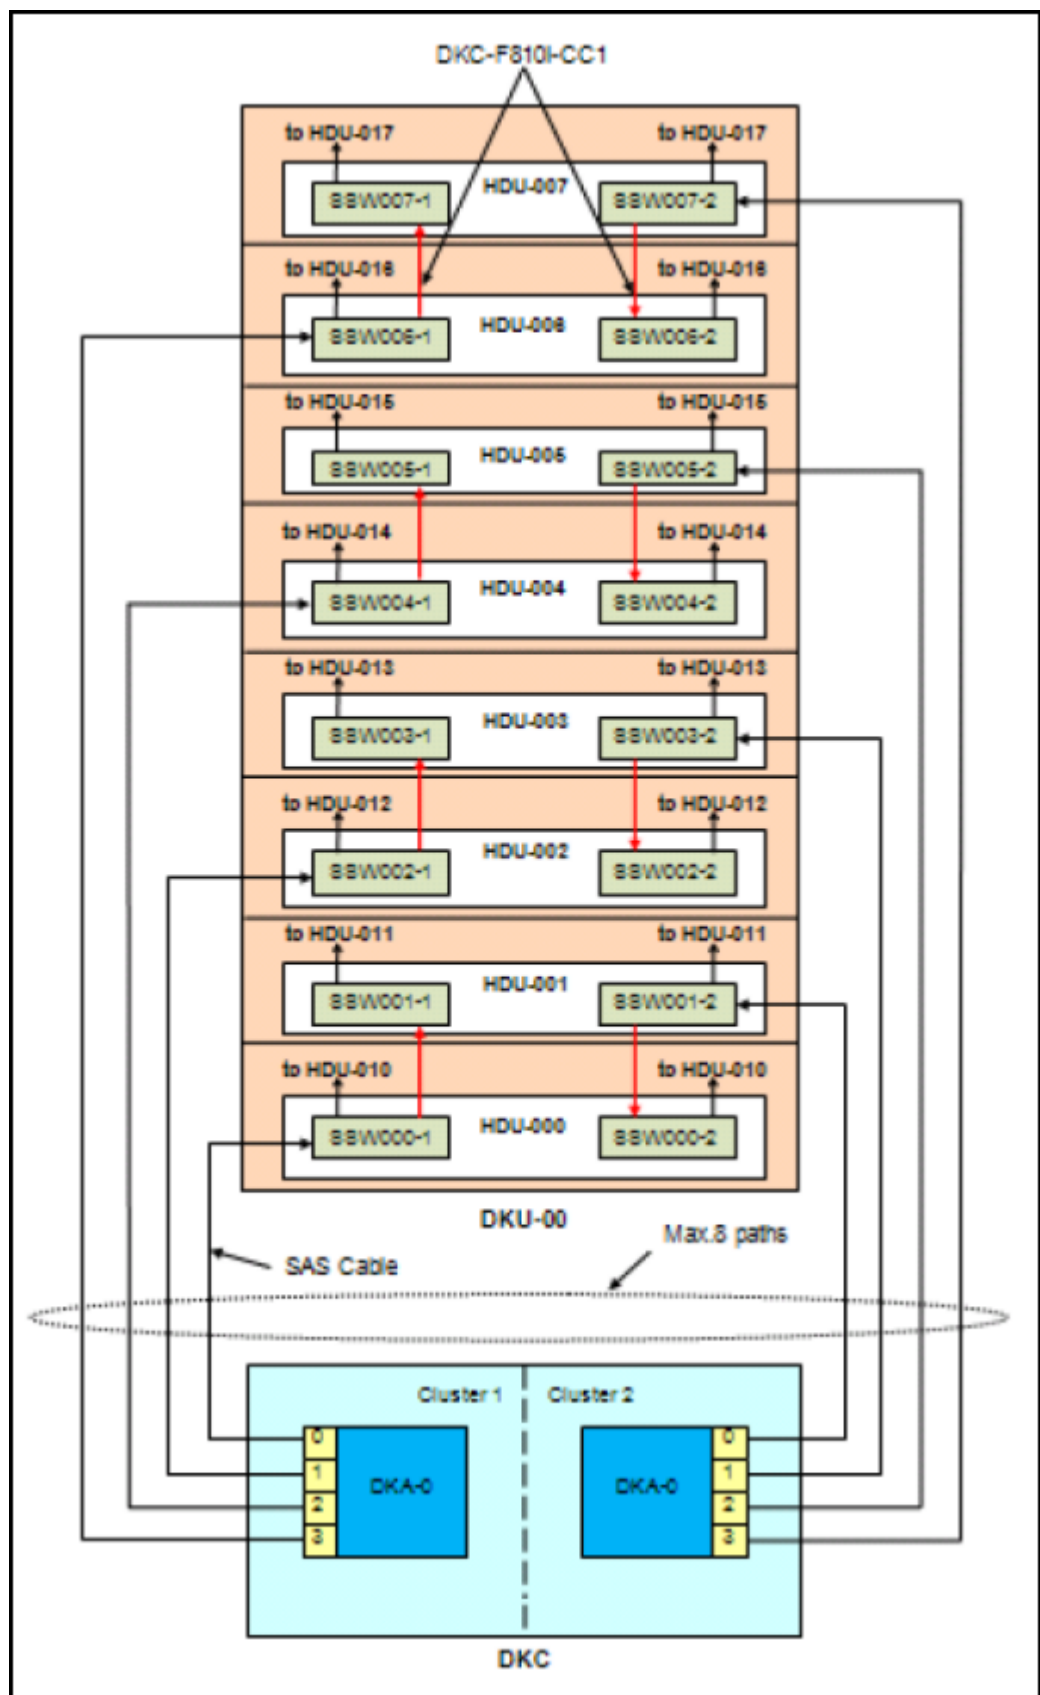


Figure 19 SAS Connection Diagram of Rack-00 (SFF/LFF Standard Model)

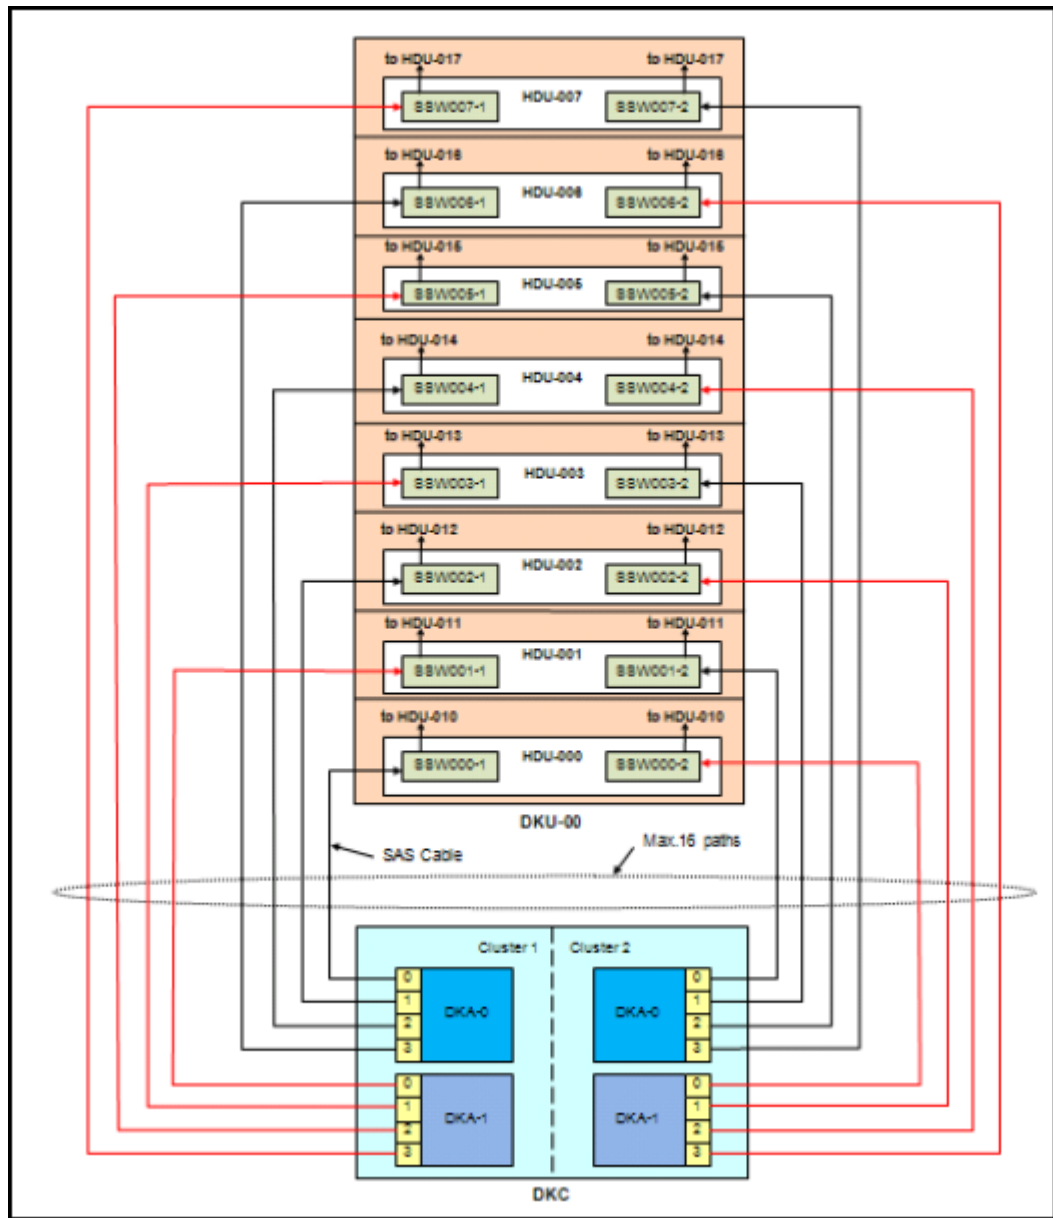


Figure 20 SAS Connection Diagram of Rack-00 (SFF/LFF High Performance Model)

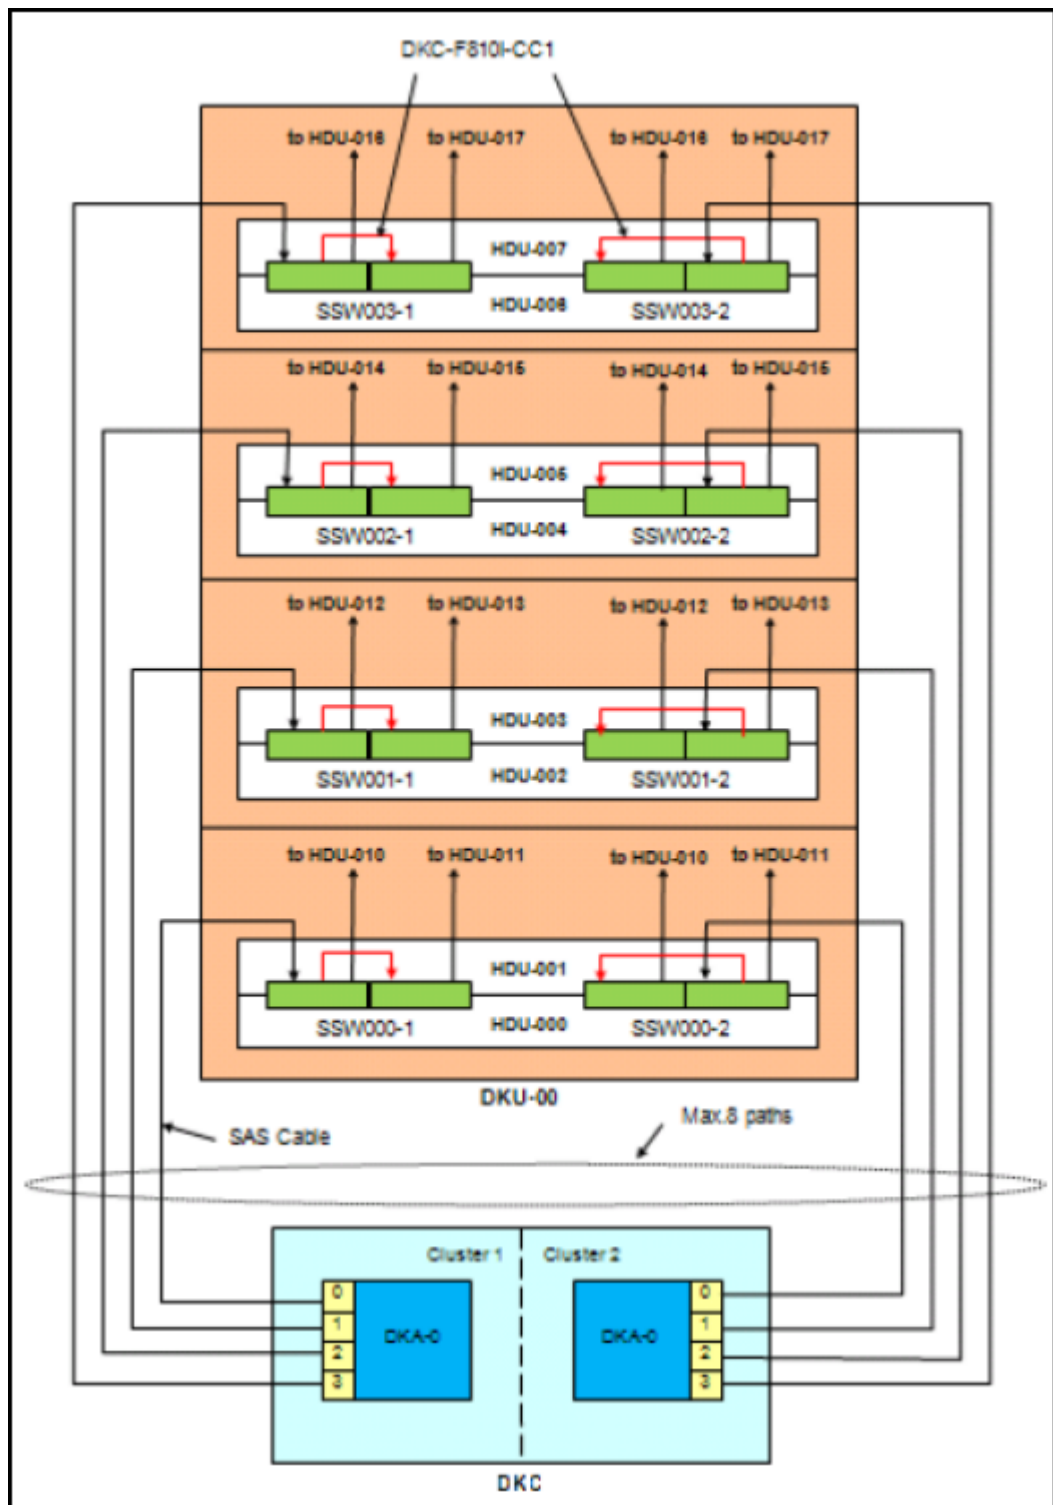


Figure 21 SAS Connection Diagram of Rack-00 (FBX Standard Model)

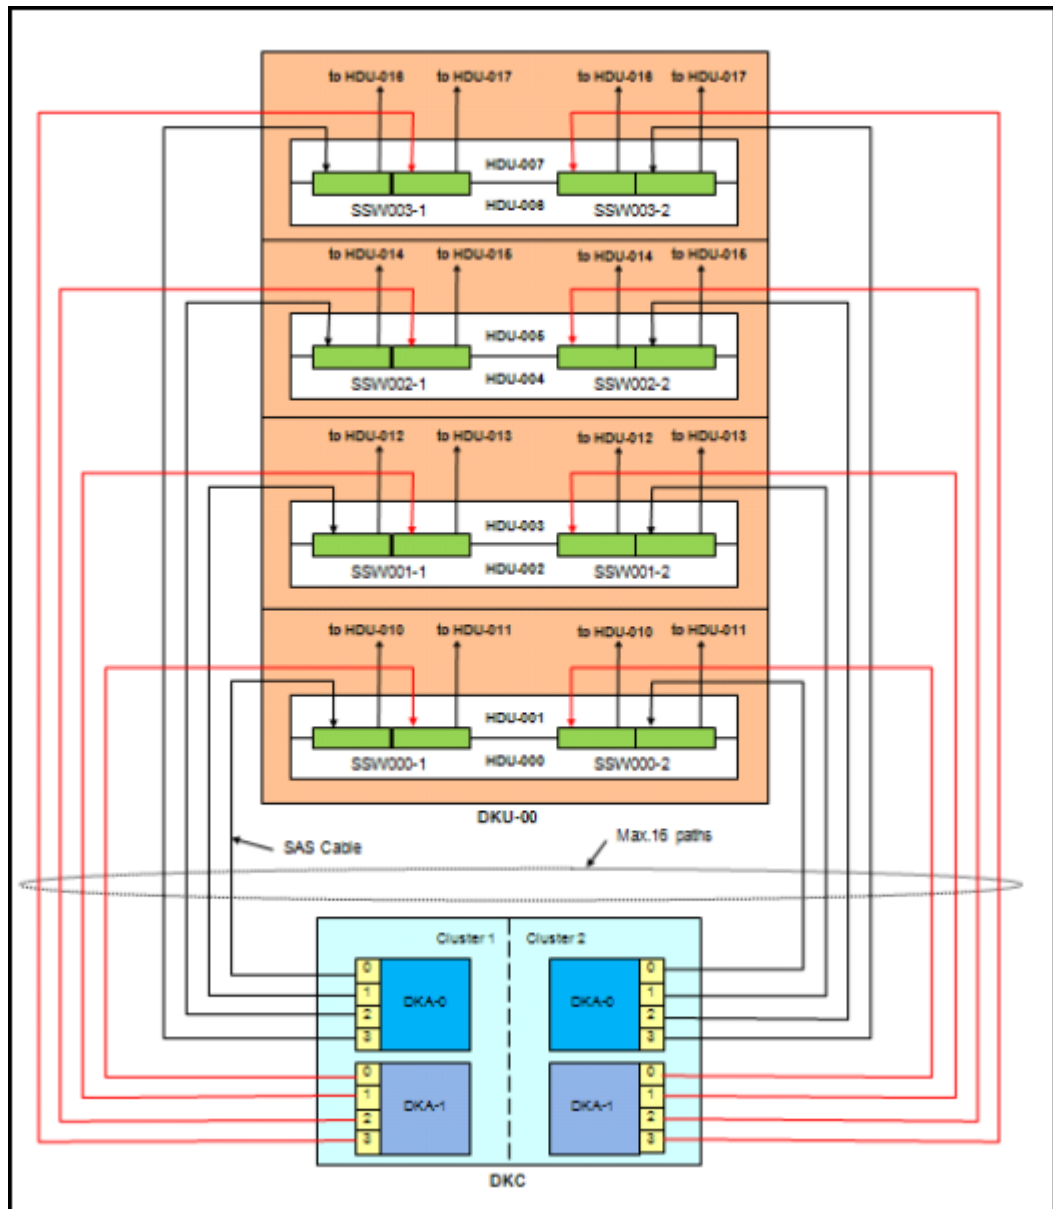


Figure 22 SAS Connection Diagram of Rack-00 (FBX High Performance Model)

Long cable connections

By default, all racks of a VSP G1000 system installed in HDS-supplied racks are physically connected to each other. Two side panels are included to cover the sides of the outermost racks (see the figure below). Within the R1 "Extended Cabling" section are multiple options that can be selected to separate the racks to meet customer requirements. The following sections provide guidance on the options available and the associated configuration rules.

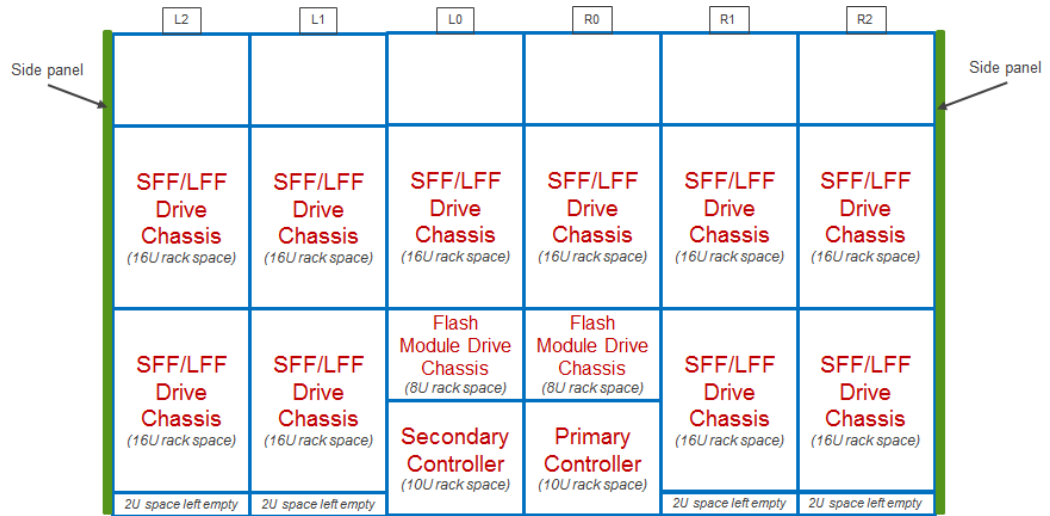


Figure 23 Default rack placement

Separated controller configuration

With a dual-controller VSP G1000 system, the primary controller and secondary controller are installed in separate racks. By default, these racks are connected to each other.

If desired, you can separate the two racks containing the primary and secondary controllers. By specifying that the racks will not be physically attached to each other, the Hitachi Configurator will ask you to specify the length of cable that will be used to connect the two controllers. Cable length options are 5 meters (which is the standard length), 30 meters, and 100 meters.

The following figure shows a dual-controller configuration, with extended cabling between the racks containing the two controllers. The Configurator will include additional side panels as required.

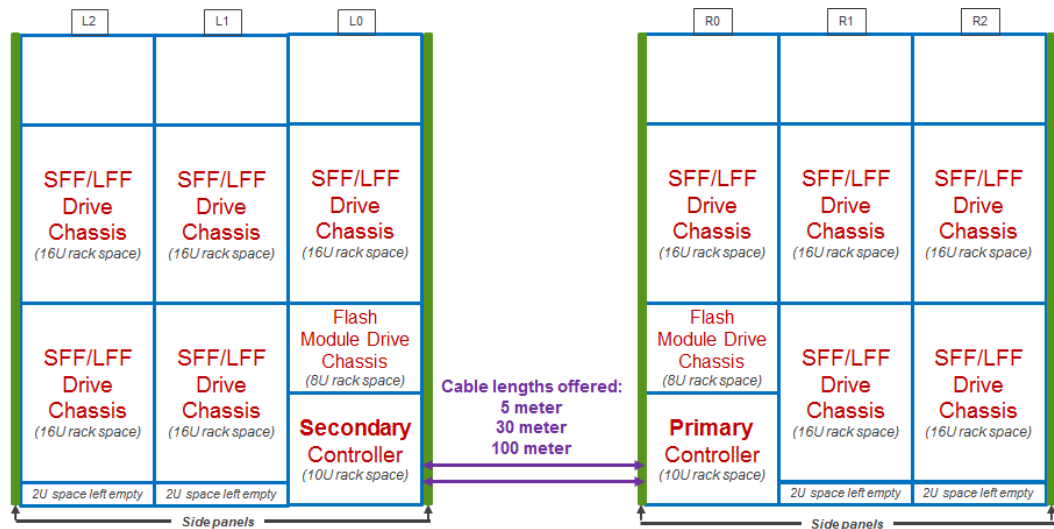


Figure 24 Example of a dual-controller configuration with extended cabling between racks

Separating drive-only racks

With either a single- or dual-controller VSP G1000 system, you can choose to separate the rack containing a controller from a rack that contains a drive chassis. You can also separate two racks that contain drive chassis only. By specifying in the Configurator that the racks will not be physically attached to each other, the Configuration will prompt you to specify the length of the SAS optical cable that will be used to connect the two racks.

SAS optical cable length options are:

- 5 meters (DKC-F810I-FC5)
- 30 meters (DKC-F810I-FC30)
- 100 meters (DKC-F810I-FC1J)

The following figure shows a single-controller configuration, with extended cabling between rack "R0" (containing the primary controller and two drive chassis) and rack "R1" (containing two drive chassis). In addition, there is extended cabling between racks "R1" and "R2." The Configurator will include the additional side panels as required.

While not shown in the following figure, extending the cabling between racks in a dual-controller configuration is also supported. Refer to Figure 4 for an example of a dual-controller configuration with extended cabling.

To avoid I/O latency issues, the sum of the length of all cables (controller-to-drive chassis cable and drive chassis-to-drive chassis cables) cannot exceed 125 meters. The Configurator will prevent you from selecting cabling that exceeds this length.

The following example shows a configuration of a controller controlling six drive chassis, the maximum supported by a controller. The sum of the cables A + B + C + D + E + F must be less than or equal to 125 meters.

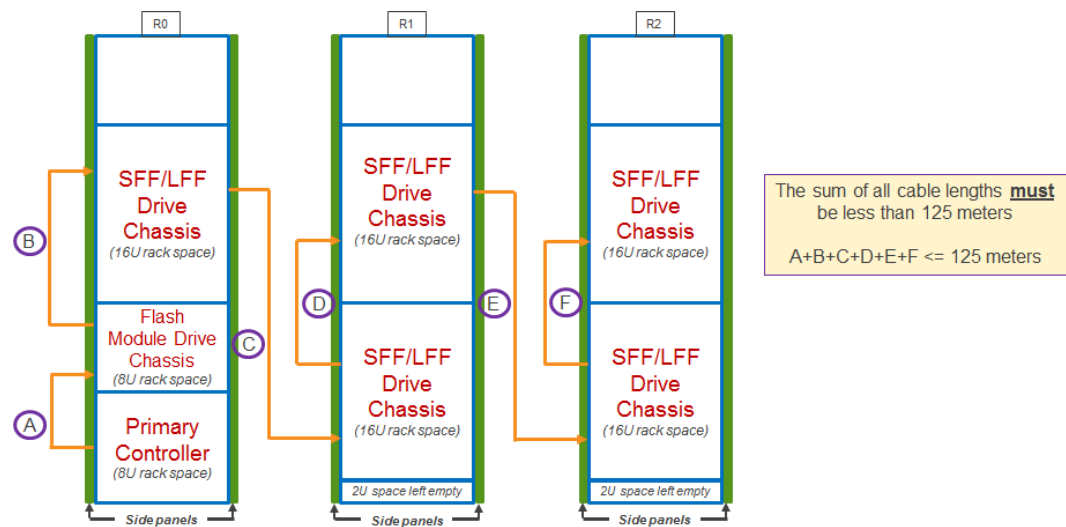


Figure 25 Example of separating drive-only racks

Separated rack configuration

In a dual-controller VSP G1000 system, you can separate the rack that contains a controller from a rack that contains drive chassis, as well as separate two racks that contain drive chassis only. This configuration combines both options described in the previous two examples.

The following figure shows a dual-controller configuration, with extended SAS optical cabling between rack "R0" containing the primary controller and rack "R1" containing two drive chassis, as well as between rack "L0" containing the secondary controller and rack "L1" containing two drive chassis. The Configurator will include the additional side panels as required.

While not shown in the following figure, the configuration can include an "R2" rack directly connected to, or separated from, the "R1" rack. Similarly, the configuration can include an "L2" rack directly connected to, or separated from, the "L1" rack.

To avoid I/O latency issues, the sum of the length of all cables (controller-to-drive chassis cable and drive chassis-to-drive chassis cables) may not exceed 125 meters. The Configurator will prevent you from selecting cabling that exceeds this length.

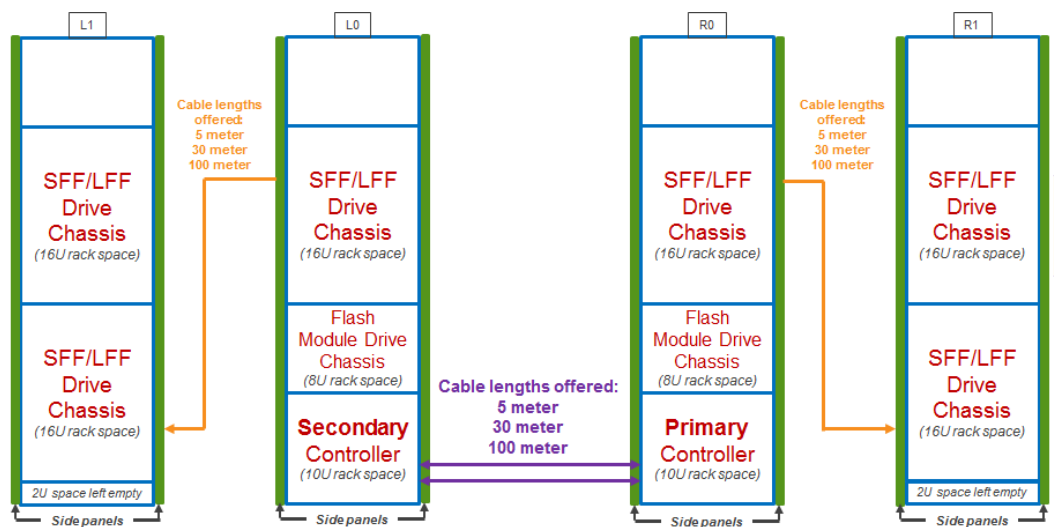


Figure 26 Example of a separated rack configuration

Additional guidelines

- You can implement extended cabling with a VSP G1000 system installed in customer-supplied racks, so long as the racks are approved by HDS Customer Sales & Support (CSS) organization as meeting HDS specifications. Customers should be informed that HDS requires that customer supplied racks housing HDS storage systems must have side panels installed on all exposed sides.
- The "High Temperature Mode" option can be implemented on VSP G1000 systems that use extended cabling.
- The minimum microcode that must be installed on the VSP G1000 to support the SAS optical cables is V02 (DKCMAIN 80-02-01-00/01), which was released October 20, 2014.
- You are strongly encouraged to keep your storage system microcode level current to ensure you have the most up-to-date enhancements and fixes. If your storage systems is using an earlier microcode release, contact your authorized service provider for assistance with planning, ordering, and installing a more current microcode release.

Port configurations

The following figures show the front-end director port configurations.

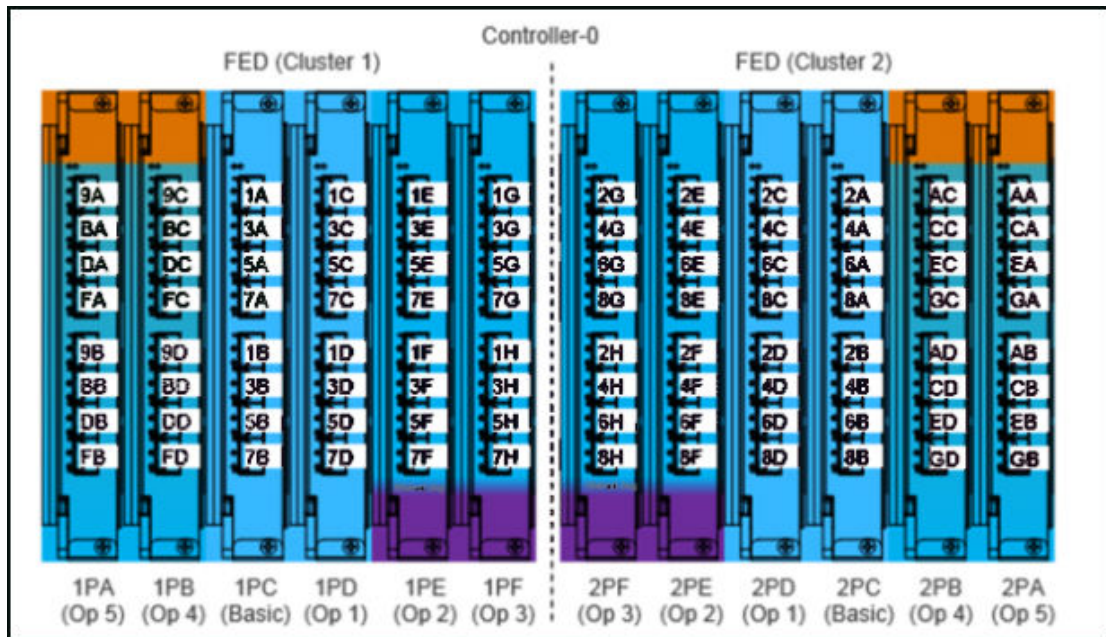


Figure 27 front-end director 16-port configuration

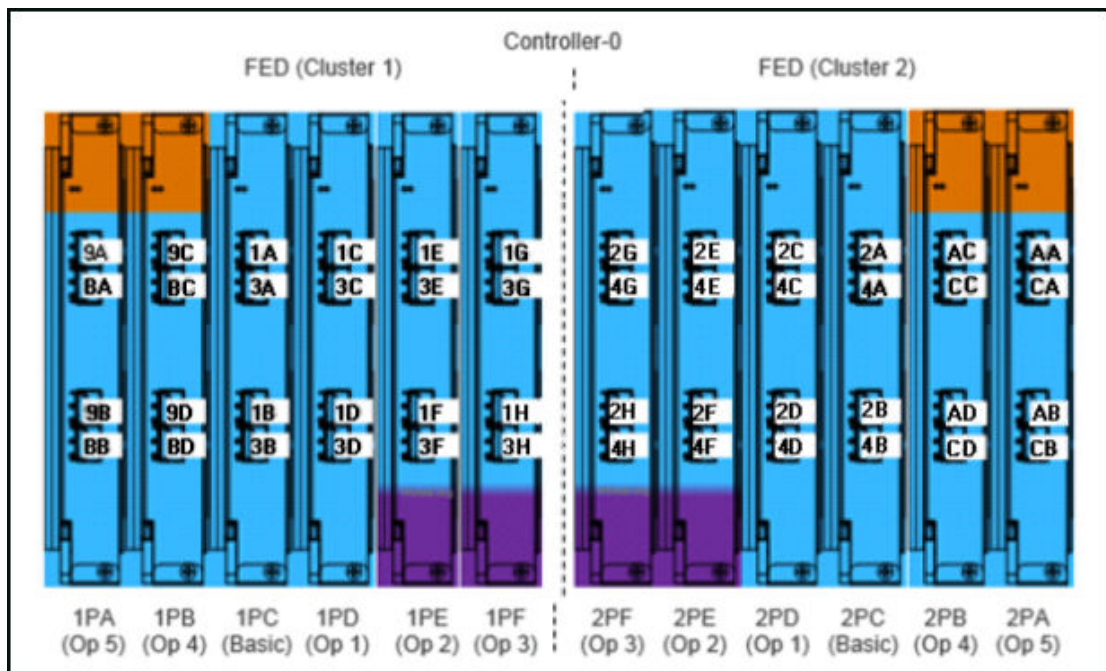


Figure 28 front-end director 8-port configuration

Service clearance, floor cutout, and floor load rating

This section describes the service clearance requirements for the VSP G1000 storage system, based on the clearance and required floor cutouts for cabling.

- Make sure that the service clearance for maintenance is available.
- Do not use the clearance space for storage
- The floor cutout area and dimensions correspond to 19-inch rack specifications
- Hitachi Data Systems recommends that you install a grid panel (air vent in floor) at least 450 x 450 mm on the front side of the rack.
- The floor must have a load rating as shown in the following table.

Table 18 Floor load rating

	Minimum Capacity	Maximum Capacity
Per square foot	62.5 lb (28.5 kg)	146 lb (66.25 kg)
Per square meter	660 lbs (300 Kg)	1,540 lb (700 Kg)



Note: For safe and efficient maintenance operations, clearances should be made as large as possible. Actual clearances for installation should be determined after consulting with the site/facilities manager, as the clearances can vary, depending on building conditions.

Single-rack configuration

The following figure shows the service clearances for a single-rack configuration.

Service clearances for a one-rack, single-controller system

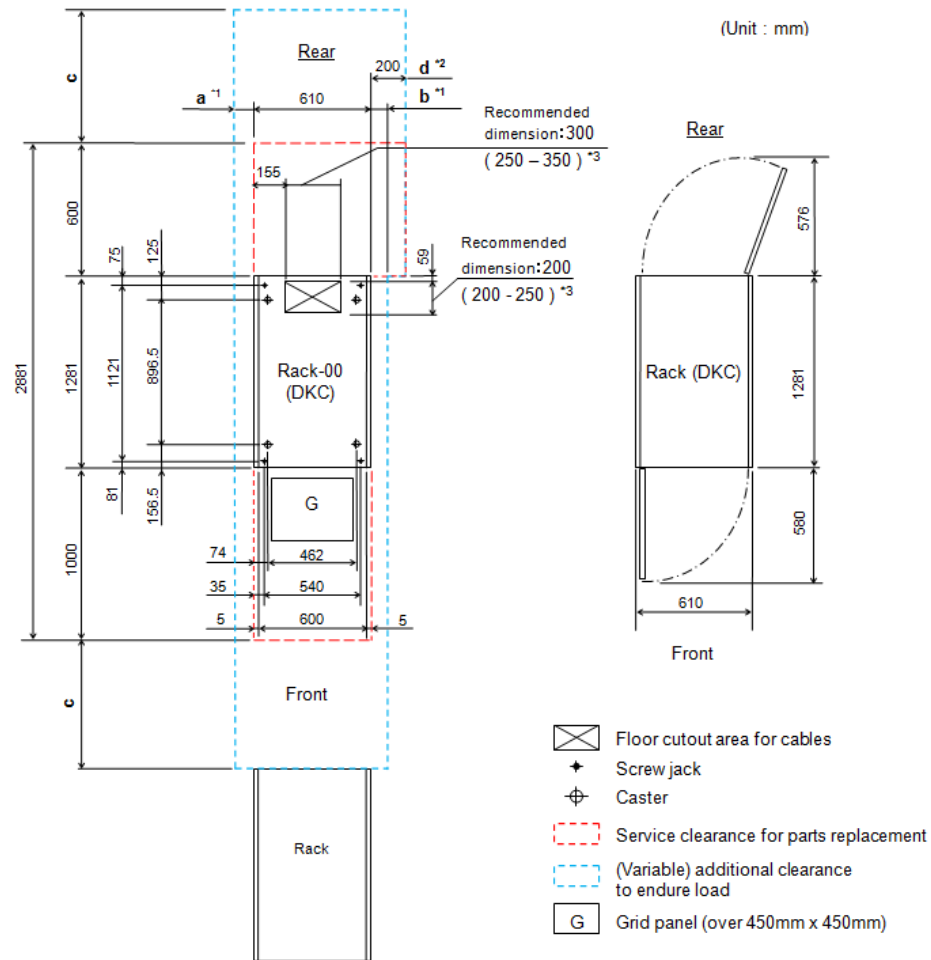



Table 19 Floor load rating and required clearances for a single-rack configuration

Floor load rating (kg/m ²)	Required clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0
600	0.1	0	0	0	0	0	0	0
500	0.4	0.2	0.1	0	0	0	0	0
450	0.6	0.4	0.3	0.2	0.1	0	0	0
400	1.0	0.7	0.6	0.5	0.4	0.3	0.2	0

Floor load rating (kg/m ²)	Required clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
350	1.5	1.2	1.0	0.6	0.7	0.6	0.5	0.3
300	2.2	1.8	1.6	1.4	1.3	1.1	1.0	0.8
Notes: <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Two-rack, single-controller configuration

The following figure shows the service clearances for a two-rack configuration.

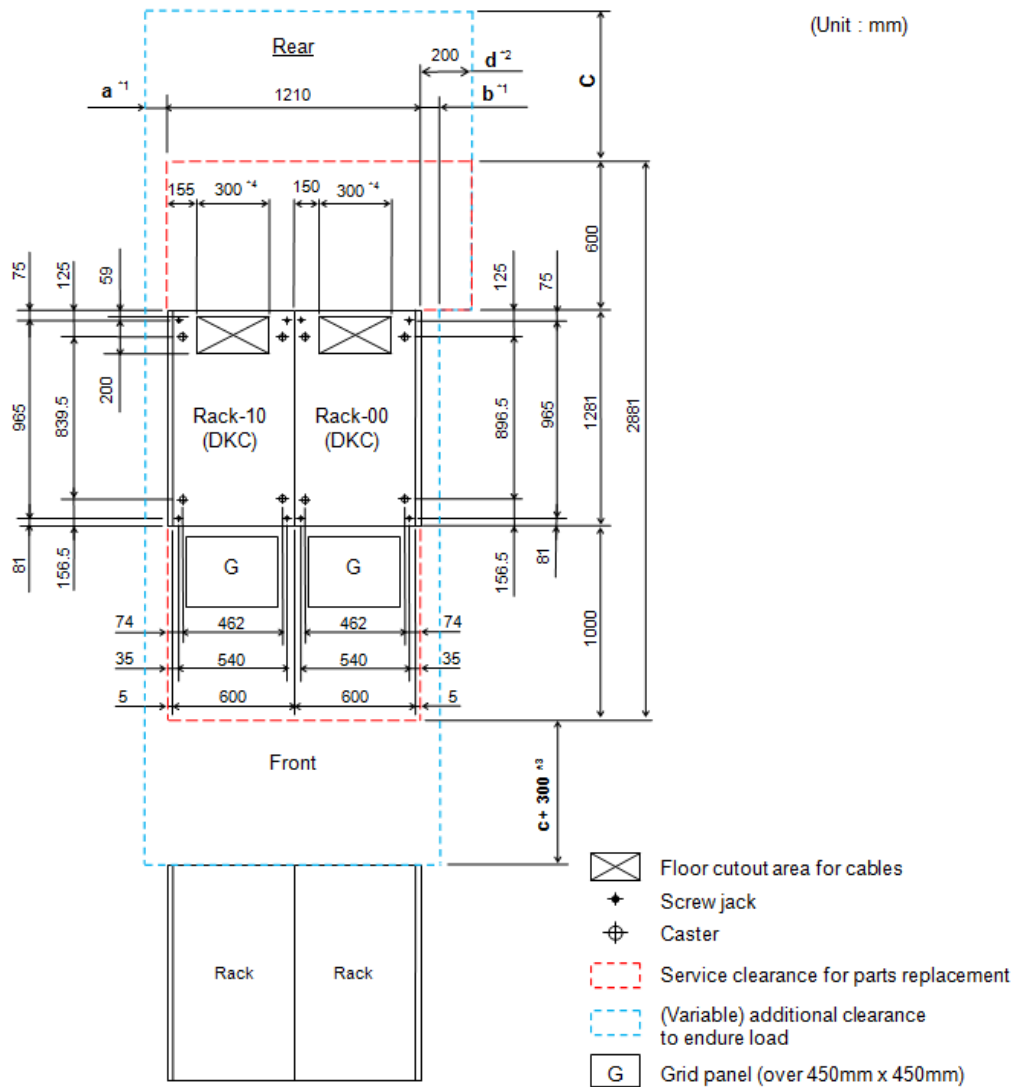

- *1: Clearance (a+b) is based on the floor load rating and the clearance (c).
Floor load rating and required clearances are shown in the table below.
- *2: Clearance (d) is required over 200mm so as to open the front door.
In case that clearance (d) is less than clearance (b), give priority to clearance (b).

Figure 29 Service clearances for a two-rack, one-controller system


Table 20 Floor load rating and required clearances for a two-rack configuration

Floor load rating (kg/m ²)	Required clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0
600	0.1	0	0	0	0	0	0	0
500	0.4	0.2	0.1	0	0	0	0	0

Floor load rating (kg/m ²)	Required clearance (a+b) m							
	c= -0.3	c20	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
450	0.6	0.4	0.3	0.2	0.1	0	0	0
400	1.0	0.7	0.6	0.5	0.4	0.3	0.2	0.
350	1.5	1.2	1.0	0.8	0.7	0.6	0.5	0.3
300	2.2	1.8	1.6	1.4	1.3	1.1	1.0	0.8
Notes: <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Two-rack, dual-controller configuration

The following figure shows the service clearances for a two-rack configuration with two controllers.

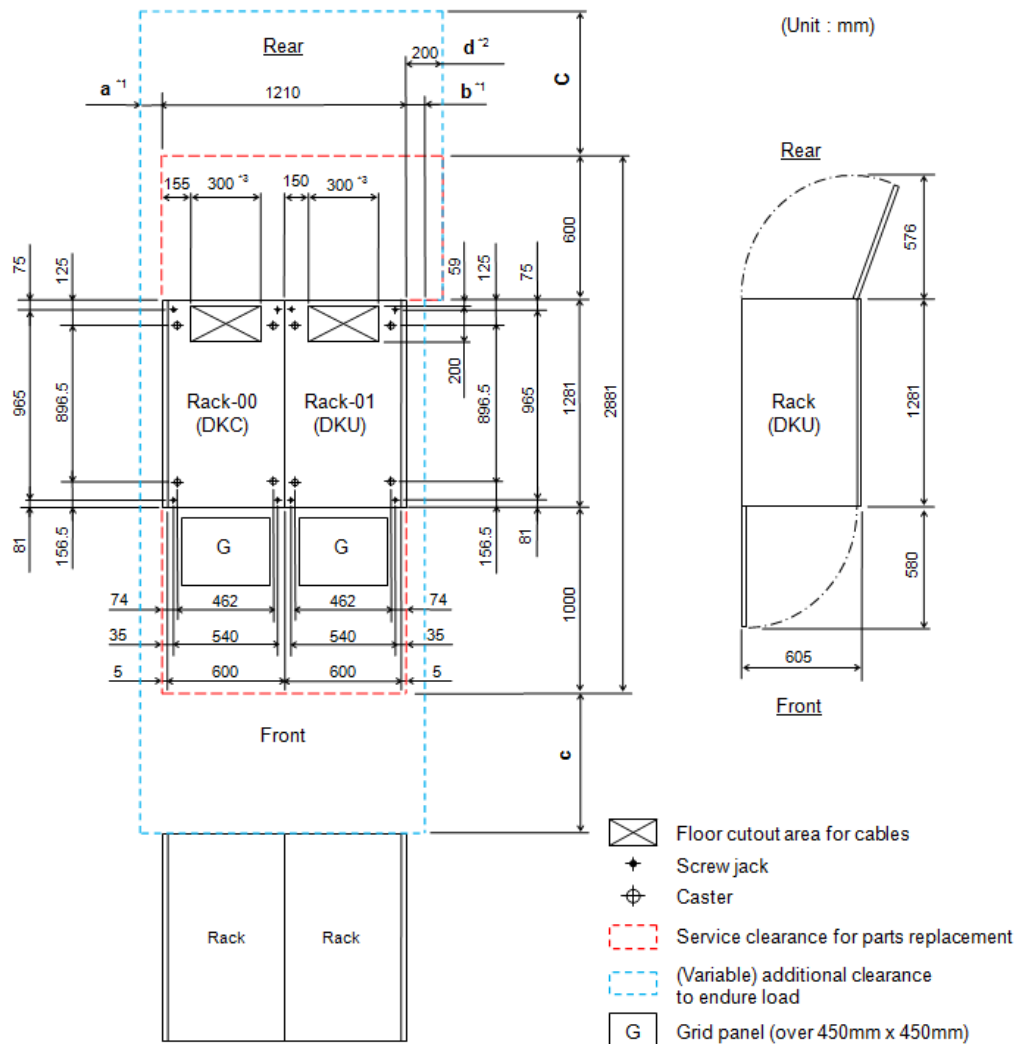

- *1: Clearance (a+b) is based on the floor load rating and the clearance (c).
Floor load rating and required clearances are shown in the table below.
- *2: Clearance (d) is required over 200mm so as to open the rear door.
In case that clearance (d) is less than clearance (b), give priority to clearance (b).

Figure 30 Service clearances for a two-rack, dual-controller system


Table 21 Floor load rating and required clearances for a two-rack configuration

Floor load rating (kg/m ²)	Required clearance (a+b) m							
	c= -0.3	c20	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0
600	0.2	0	0	0	0	0	0	0
500	0.6	0.4	0.2	0.1	0.1	0	0	0

Floor load rating (kg/m ²)	Required clearance (a+b) m							
	c= -0.3	c20	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
450	0.8	0.6	0.5	0.4	0.3	0.2	0.1	0
400	1.2	0.9	0.8	0.6	0.5	0.4	0.3	0.2
350	1.8	1.4	1.2	1.1	0.9	0.8	0.7	0.5
300	2.6	2.2	1.9	1.7	1.5	1.4	1.0	1.0
Notes: <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Three-rack, single-controller configuration

The following figure shows the service clearances for a three-rack configuration with one controller.

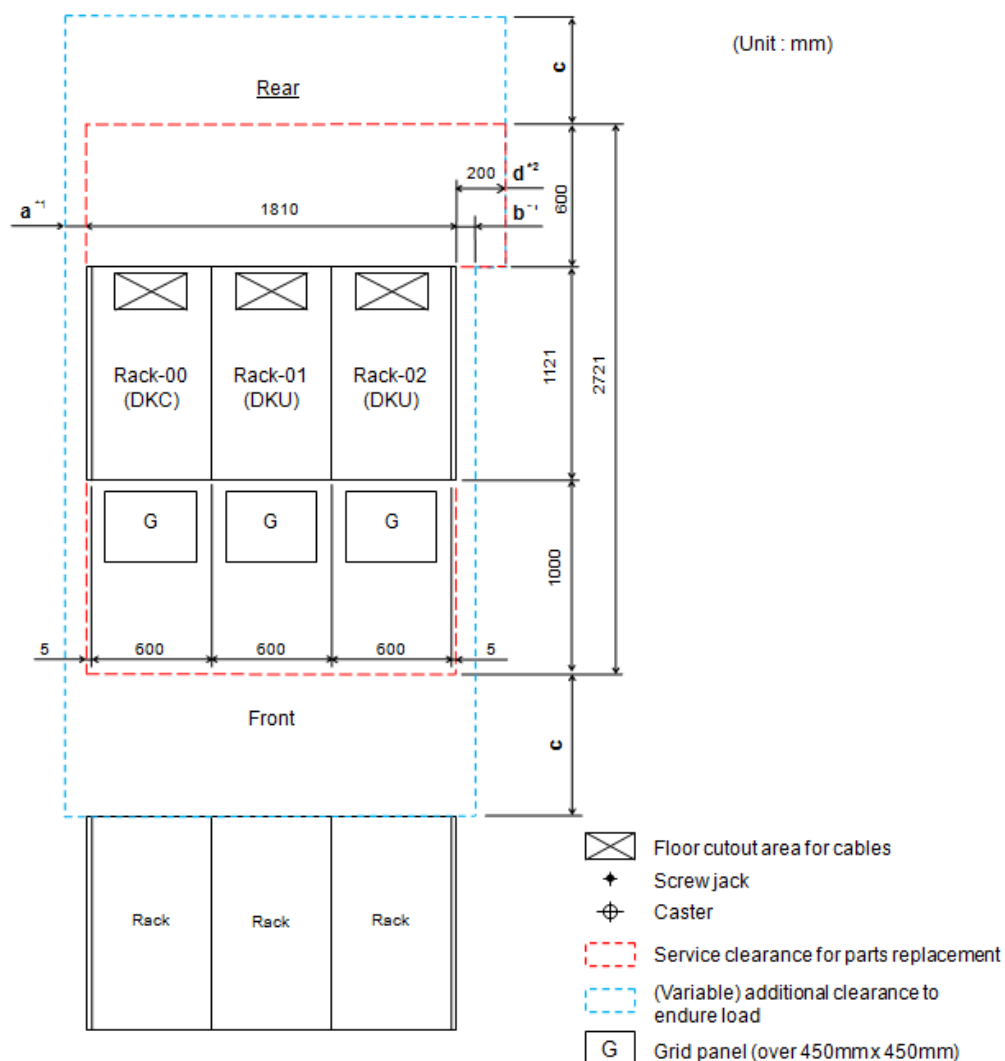

- *1: Clearance (a+b) is based on the floor load rating and the clearance (c).
Floor load rating and required clearances are shown in the table below.
- *2: Clearance (d) is required over 200mm so as to open the rear door.
In case that clearance (d) is less than clearance (b), give priority to clearance (b).

Figure 31 Service clearances for a three-rack, single-controller system


Table 22 Floor load rating and required clearances for a three-rack, single-controller configuration

Floor load rating (kg/m ²)	Required clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0
600	0	0	0	0	0	0	0	0
500	0.5	0.2	0.1	0	0	0	0	0

Floor load rating (kg/m ²)	Required clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
450	0.9	0.5	0.4	0.2	0.1	0	0	0
400	1.3	1.0	0.8	0.6	0.4	0.3	0.2	0
350	2.0	1.6	1.3	1.1	0.9	0.8	0.6	0.4
300	3.1	2.6	2.2	2.0	1.7	1.5	1.3	1.0
Notes: <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Three-rack, dual-controller configuration

The following figure shows the service clearances for a three-rack configuration with two controllers.

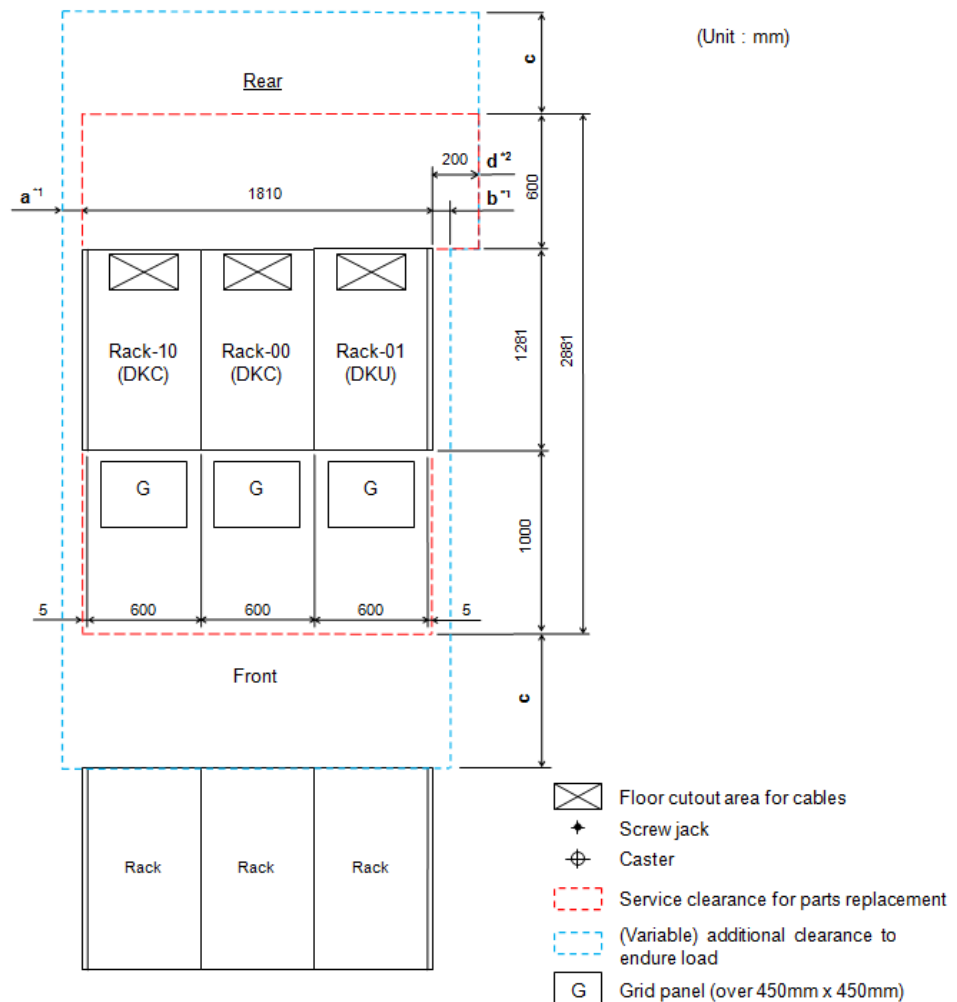

*1: Clearance (a+b) is based on the floor load rating and the clearance (c).

Floor load rating and required clearances are shown in the table below.

*2: Clearance (d) is required over 200mm so as to open the rear door.

In case that clearance (d) is less than clearance (b), give priority to clearance (b).

Figure 32 Service clearances for a three-rack, dual-controller system

Table 23 Floor load rating and required clearances for a three-rack, dual-controller configuration

Floor Load Rating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0
600	0.2	0	0	0	0	0	0	0
500	0.7	0.4	0.2	0.1	0	0	0	0
450	1.1	0.7	0.5	0.4	0.2	0.1	0	0
400	1.6	1.2	1.0	0.8	0.6	0.5	0.3	0.1

Floor Load Rating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
350	2,3	1.8	1.6	1.3	1.1	1.0	0.8	0.5
300	3.5	2.9	2.5	2.2	2.0	1.8	1.6	1.2
Notes: <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Four-rack configuration - two controllers (center)

The following figure shows the service clearances for a four-rack, two-controller configuration, with the controllers in the center two racks.

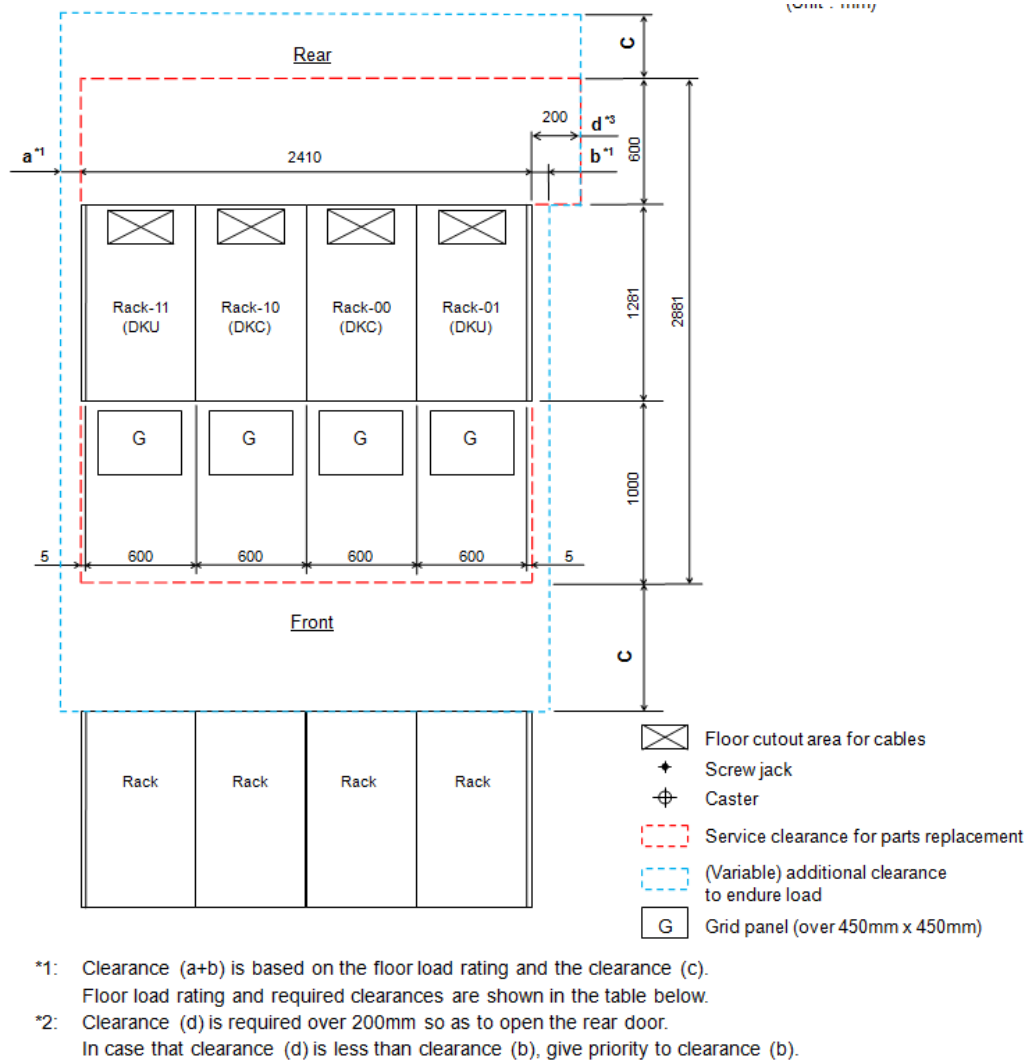


Figure 33 Service clearances for a four-rack, two-controller system

Table 24 Floor load rating and required clearances for a four-rack, two-controller system

Floor Load Rating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0
600	0.1	0	0	0	0	0	0	0
500	0.8	0.4	0.2	0	0	0	0	0
450	1.3	0.8	0.6	0.4	0.2	0.1	0	0
400	1.9	1.4	1.1	0.9	0.7	0.5	0.3	0.1
350	2.9	2.3	1.9	1.6	1.4	1.2	0.9	0.6

Floor Load Rating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
300	4.4	3.6	3.2	2.8	2.5	2.2	1.9	1.5
Notes: <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Four-rack configuration - two controllers (left)

The following figure shows the service clearances for a four-rack, two-controller configuration, with the controllers in the left two racks.

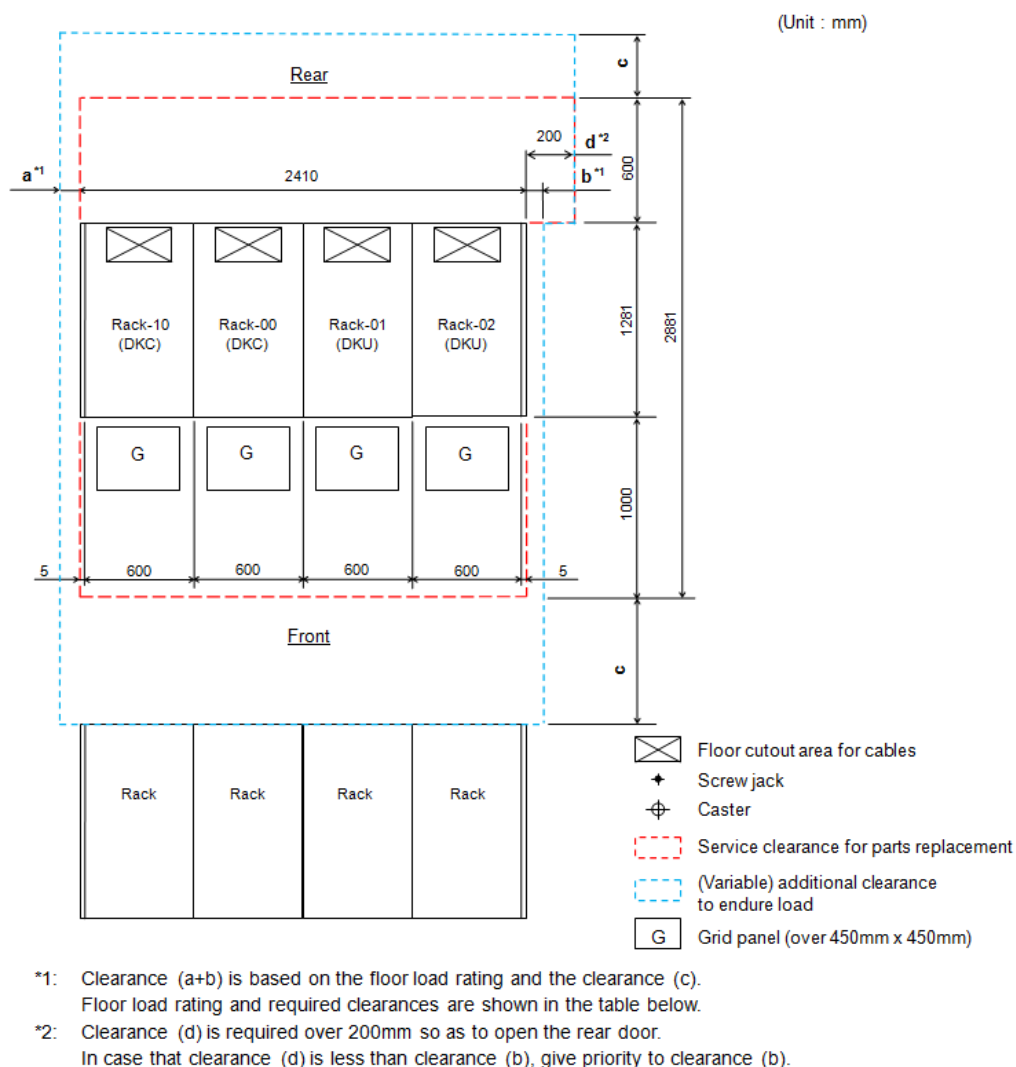


Figure 34 Service clearances for a four-rack, two-controller system


Table 25 Floor load rating and required clearances for a four-rack, two-controller system

Floor Load Rating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0
600	0.1	0	0	0	0	0	0	0
500	0.8	0.4	0.2	0.	0	0	0	0
450	1.	0.8	0.6	0.4	0.2	0.1	0	0
400	1.9	1.4	1.1	0.9	0.7	0.5	0.3	0.1

Floor Load Rating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
350	2.9	2.3	1.9	1.6	1.4	1.2	0.9	0.6
300	4.4	3.6	3.2	2.8	2.5	2.2	1.9	1.5
Notes: <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Five-rack configuration

The following figure shows the service clearances for a five-rack configuration.

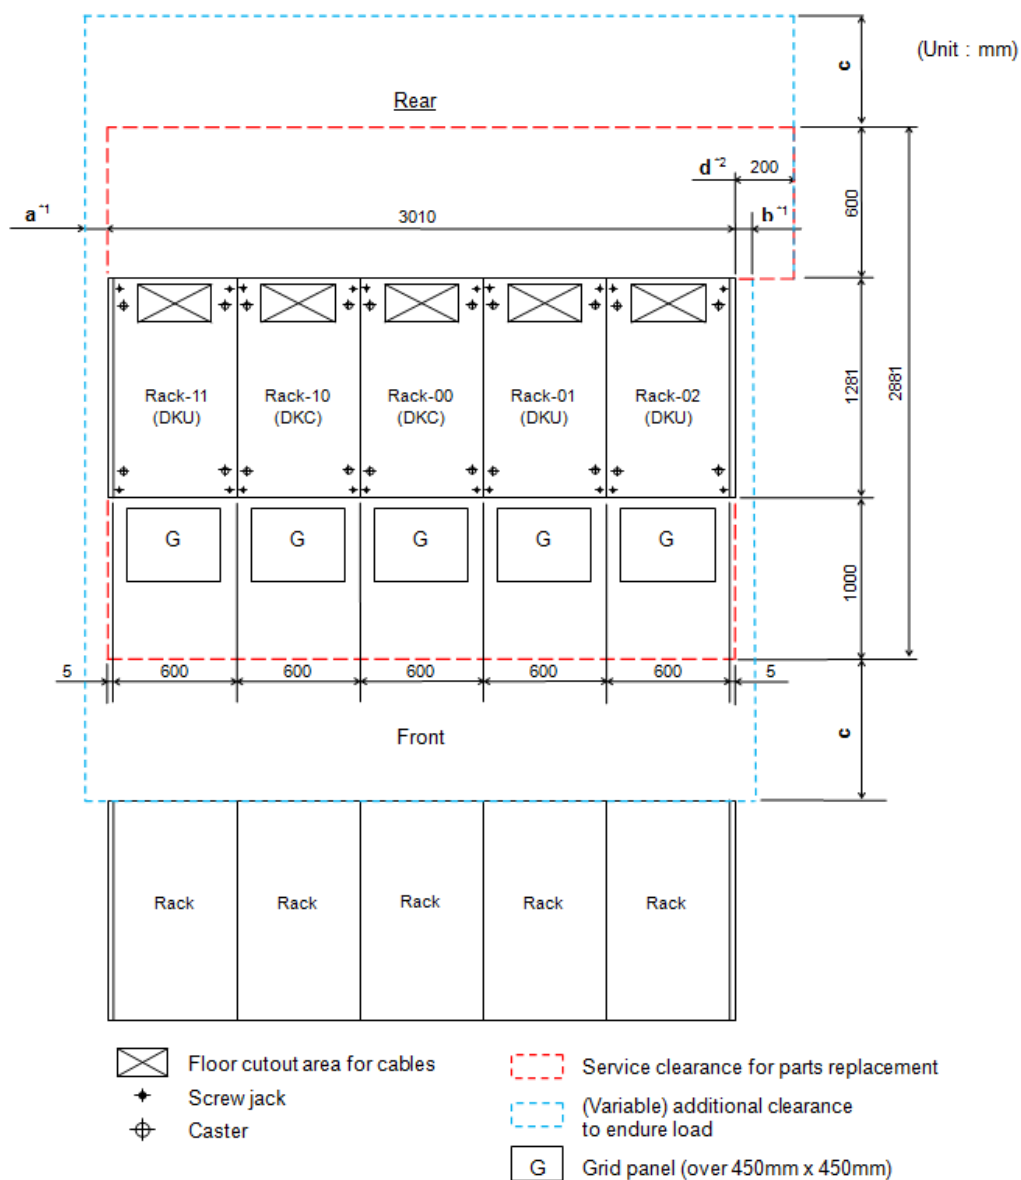

- *1: Clearance (a+b) is based on the floor load rating and the clearance (c).
Floor load rating and required clearances are shown in the table below.
- *2: Clearance (d) is required over 200mm so as to open the rear door.
In case that clearance (d) is less than clearance (b), give priority to clearance (b).

Figure 35 Service clearances for a five-rack system


Table 26 Floor load rating and required clearances for a five-rack configuration

Floor Load Rating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0

Floor Load Rating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
600	0	0	0	0	0	0	0	0
500	0.8	0.3	0.1	0	0	0	0	0
450	1.4	0.9	0.6	0.3	0.1	0	0	0
400	2.2	1.6	1.2	0.9	0.7	0.5	0.3	0
350	3.3	2.6	2.2	1.3	1.5	1.2	1.0	0.6
300	5.2	4.2	3.7	3.2	2.8	2.5	2.2	1.6
Notes: <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Six-rack configuration

The following figure shows the service clearances for a six-rack configuration.

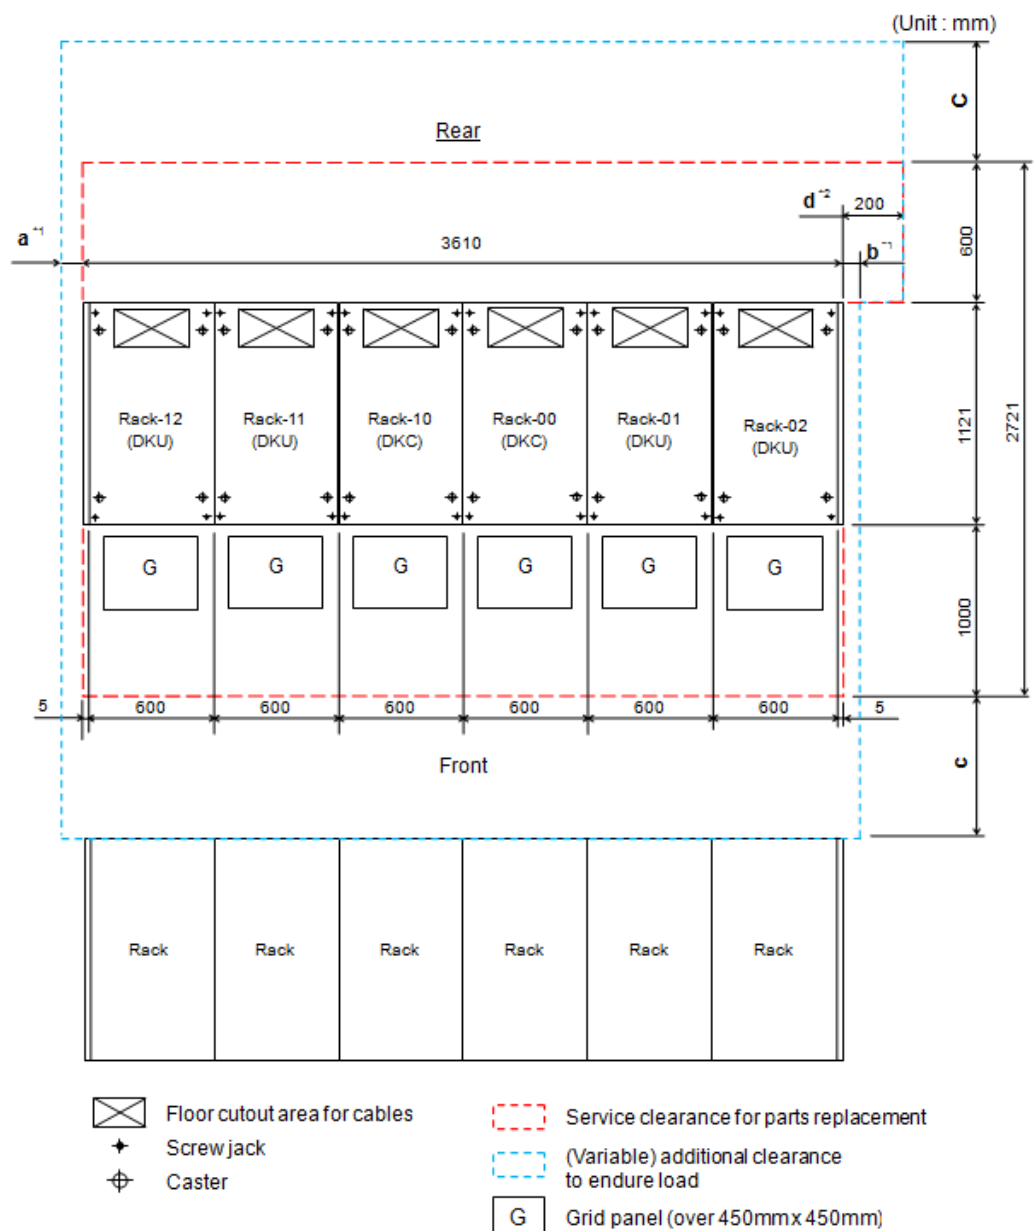

- *1: Clearance (a+b) is based on the floor load rating and the clearance (c).
Floor load rating and required clearances are shown in the table below.
- *2: Clearance (d) is required over 200mm so as to open the front door.
In case that clearance (d) is less than clearance (b), give priority to clearance (b).


Figure 36 Service clearances for a six-rack system

Table 27 Floor load rating and required clearances for a six-rack configuration

Floor LoadRating (kg/m ²)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
Over 700	0	0	0	0	0	0	0	0
600	0	0	0	0	0	0	0	0
500	1.0	0.4	0.1	0	0	0	0	0
450	1.7	1.1	0.7	0.4	0.2	0	0	0
400	2.6	1.9	1.5	1.2	0.9	0.6	0.3	0
350	4.0	3.1	2.6	2.2	1.8	1.5	1.2	0.7
300	6.2	5.1	4.4	3.9	3.4	3.0	2.6	2.0
Notes; 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible.								

Seven-rack configuration

The following figure shows the service clearances for a seven-rack configuration.



Floor LoadRating (kg/m2)	Required Clearance (a+b) m							
	c= -0.3	c=0	c=0.2	c=0.4	c=0.6	c=0.8	c=1.0	c=1.4
450	2,9	2.2	1.8	1.5	1.2	1.0	0.7	0.4
400	4.0	3,2	2.7	2.3	2.0	1.7	1.4	1.0
350	5.6	4.6	4.0	3.5	3.1	2.7	2.4	1.9
300	8.0	6.7	6.0	5.4	4.9	4.4	4.0	3.3
Notes; <ol style="list-style-type: none"> 1. Actual clearances for installation should be determined after consulting with the construction specialist responsible for installations in the building. Clearances can vary depending on the size/layout of the system and building conditions. 2. When various configurations of storage systems are arranged in a row, clearance values based on the largest storage system configuration should be used. 3. For easier maintenance operations, make clearance (c) as large as possible. 								

Power on/off procedures

This chapter describes the prerequisites and procedures to turn the Hitachi Virtual Storage Platform G1000 power on and off. It also describes the procedures to follow in case of a power failure.

- ☐ [Safety and environmental information](#)
- ☐ [Power control panel](#)
- ☐ [System idle mode](#)
- ☐ [Normal power on/off procedures](#)
- ☐ [Emergency power off/on procedures](#)
- ☐ [Battery backup operations](#)

Safety and environmental information



Caution: Before operating or working on the VSP G1000 storage system, read [Safety requirements on page 65](#), and the environmental information in [Regulatory Compliance on page 185](#).

Power control panel

The power control panel is located in the upper left corner of the controller. It is covered by a 2U high bezel that can be removed separately from the 8U bezel that covers the rest of the controller.



Figure 38 VSP G1000 controller upper panel

The following illustration shows the switches and indicators on the control panel. The table following the illustration explains what each switch and LED is for. All LEDs are shown ON to demonstrate the color of the LED.

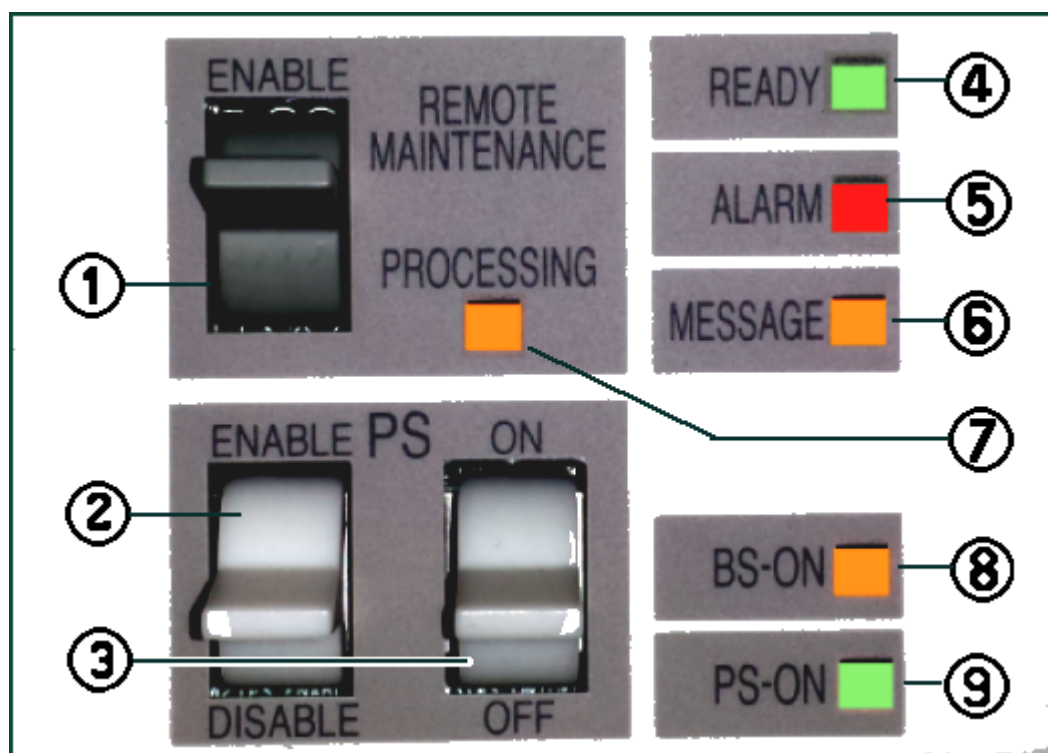


Figure 39 VSP G1000 control panel

Table 29 VSP G1000 power controls and status indicators

Item	Description
1	REMOTE MAINTENANCE switch <ul style="list-style-type: none"> Set to ENABLE to allow remote maintenance. Set to DISABLE to prevent remote maintenance.
2	ENABLE switch Used to enable the PS ON/PS OFF switch. See Power on procedures on page 123 .
3	POWER switch. Move up or down to turn system power on or off. See Power on procedures on page 123 .
4	READY LED - indicates the operational status of the system <ul style="list-style-type: none"> Off when the channel interface is not operational. Green Indicates that input/output operation on the channel interface is enabled.
5	ALARM LED <ul style="list-style-type: none"> Off when the system is off or when the system is on and operational with no failures . Red when the SVP detects a component failure or other failure condition in the system
6	MESSAGE LED <ul style="list-style-type: none"> Off when power is off, or when no system generated message is in the queue, and no SVP has failed. Amber* On when a system information message (SIM) is generated by either of the clusters and has been sent to Device Manager - Storage Navigator and to the users that are set up in Device Manager - Storage Navigator to receive them* Blinking when an SVP failure has occurred in a single SVP configuration, or of both SVPs have failed in a dual SVP configuration. Does not blink if only one SVP in a dual SVP configuration fails.
7	PROCESSING LED - indicates the status of remote processing. <ul style="list-style-type: none"> Off when power is off or when no emote maintenance is taking place. Amber - ON when remote maintenance is taking place.

Item	Description
8	<p>BS-ON LED - indicates the status of the AC power to the system (basic supply).</p> <ul style="list-style-type: none"> Off when AC power is applied to the system from the PDUs. Amber - ON when AC power is applied to the system from the PDUs. The fans will be running.
9	<p>PS-ON LED - indicates the status of the DC power to the system.</p> <ul style="list-style-type: none"> Off when no AC power is applied to the system and when AC power is applied and the system is in idle mode Green when the power switch is ON, DC power applied to the system, and the system is running.

System idle mode

When the storage system power cables are plugged into the PDUs and the PDU breakers are on, the storage system is in idle (basic supply only) mode. When the storage system is in idle mode:

- The amber Basic Supply (BS) LED on the control panel is on. This indicates that AC power is applied to the power supplies.
- The green READY LED is off. This indicates that the controller and drive chassis are not operational.
- The fans in both the controller and drive chassis are running.
- The cache backup batteries are being charged.
- The storage system consumes significantly less power than it does in operating mode. For example, a storage system that draws 100 amps while operating draws only 40 to 60 amps in idle mode, depending on the number of HDD drives in the system. The more drives, the more power is saved. See [Table 30 Maximum idle power per chassis on page 123](#) below and [Table 35 VSP G1000 mechanical specifications on page 138](#).

To put the storage system into idle mode from the OFF condition:

1. Ensure that power is available to the AC input boxes and PDUs in all racks in which the VSP G1000 storage system is installed.
2. Turn all PDU power switches/breakers ON.

To put the storage system into idle mode from a power on condition, complete the steps in [Power off procedures on page 124](#).

To completely power down the storage system, complete the power off procedures in this chapter, then turn off all PDU circuit breakers.



Warning: Make certain that the storage system is powered off normally and in idle mode before turning off the PDU circuit breakers. Otherwise, turning off the PDU circuit breakers can leave the storage system in an abnormal condition.

Table 30 Maximum idle power per chassis

Chassis	Maximum idle power [VA]
Controller Chassis 0 or 1	500
SFF Drive Chassis	1,120
LFF Drive Chassis	720
FMD Drive Chassis	1,280

Normal power on/off procedures

This section provides general information about power on/off procedures for the VSP G1000 storage system. If needed, call technical support for assistance.

Power on procedures

Prerequisites

- Ensure that the storage system is in idle mode. See [System idle mode on page 122](#).



Note: The control panel includes a safety feature to prevent the storage system power from accidentally being turned on or off. The PS power ON/OFF switch does not work unless the ENABLE switch is moved to and held in the ENABLE position while the power switch is moved to the ON or OFF positions.

Follow this procedure exactly when turning the storage system on. Refer to the illustration of the control panel in [Figure 39 VSP G1000 control panel on page 121](#), as needed.

Procedure

1. On the control panel, check the amber BS LED and make sure it is lit. It indicates that the storage system is in idle mode.
2. In the PS area on the control panel, move the ENABLE switch to the ENABLE position and hold it there. While holding the switch in the ENABLE position, move the PS ON/OFF switch to the ON position. Then release both switches.
3. Wait for the storage system to complete its power-on self-test and boot-up processes. Depending on the storage system configuration, this may take several minutes.

The storage system will not go to the READY state until the cache backup batteries are charged to at least 50%. This could take up to 90 minutes if the batteries are completely discharged. The storage system generates a SIM that provides the status of the battery charge. See [Cache backup batteries on page 126](#) for information about the batteries.

4. When the system self test is complete and all components are operating normally, the green READY LED will light. When the green READY LED is ON, the storage system is ready for use.

If the ALARM LED is also on, or if the READY LED is not ON after 20 minutes, contact Technical Support for assistance.

Power off procedures

Prerequisites

- Ensure that all maintenance and software-specific shutdown procedures have been completed. For details, refer to the applicable user manuals.
- **Ensure that all I/O activity to the storage system has stopped.** You can vary paths offline and shut down the attached hosts.
- Follow this procedure exactly when powering the storage system off.



Caution: Except in an emergency, do not turn the PDU breakers off before you turn the system power off. If you do, the system will react as it would in a power failure and use the cache backup batteries to keep the cache alive until data in the cache has been transferred to the cache backup flash memory. Emergency processing drains the batteries and prolongs the next power-on time depending how much charge remains in the batteries. Fully discharged batteries take 90 minutes to charge.



Note: The control panel includes a safety feature to prevent the storage system power from accidentally being turned on or off. The PS power ON/OFF switch does not work unless the ENABLE switch is moved to and held in the ENABLE position while the power switch is moved to the ON or OFF positions.

Procedure

1. In the PS area on the control panel, move the ENABLE switch to the ENABLED position and hold it there. While holding the switch in the ENABLED position, move the PS ON/OFF switch to the OFF position. Then release both switches.
2. Wait for the storage system to complete its shutdown routines. Depending on the storage system configuration and certain MODE settings, it can take up to 20 minutes for the storage system to copy data from the cache to the cache flash drives and for the disk drives to spin down.
If the READY and PS ON LEDs do not turn OFF after 20 minutes, contact the support center for assistance.

Emergency power off/on procedures

This section describes the procedures to follow to shut down the system in case of emergency and how to bring the system back up after an emergency shutdown.



Note: Observe the following guidelines when powering on or powering off PDUs.

- **Controllers:** Turn PDUs off first. Turn PDUs on last.
 - **Drives:** Turn PDUs off last. Turn PDUs on first.
-

Emergency power off procedure

The VSP G1000 storage system does not have an emergency power off switch. To shut the system down in an emergency, turn off the controllers first, then the drive units, as follows.

Procedure

1. Open the back doors of both racks that contain control units.
2. Turn off the circuit breakers using the following order:
 - a. Turn off the circuit breakers in both lower PDUs in both racks.
 - b. Turn off the circuit breakers in both upper PDUs in both racks with control units.
3. Open the back doors of all racks that contain only drive units and turn the circuit breakers off in all the PDUs in any order in those racks.

Power on procedure after emergency power off

To turn the VSP G1000 storage system on after emergency shutdown, reverse the emergency power off procedure.

Procedure

1. In all system racks, turn on the circuit breakers in the PDUs that power the drive units.
2. In both controller racks, turn on the circuit breakers in the PDUs that power the controllers.
3. Follow the instructions in [Normal power On/Off procedures on page 123](#).


Battery backup operations

The VSP G1000 is designed so that it cannot lose data or configuration information if the power fails. The battery system is designed to provide enough power to completely back up all data in the cache if two consecutive

power failures occur and the batteries are fully charged. If the batteries do not contain enough charge to provide sufficient time to back up the cache when a power failure occurs, the cache operates in write through mode. This writes directly to the drives to prevent slow data throughput via the cache. When the battery charge is 50% or more, the cache write through mode is turned off and the system operates normally.

When a power failure occurs and continues for up to 20 milliseconds, the storage system continues normal operation. If the power failure exceeds 20 milliseconds, the storage system uses power from the batteries to keep the cache alive while the system copies the storage system configuration and data in the cache to the cache flash drives (SSD) in the cache backup modules. This continues for up to 32 minutes. The cache flash drives do not require power to retain the data, so the data is preserved indefinitely.

The following illustration shows the timing in the event of a power failure.

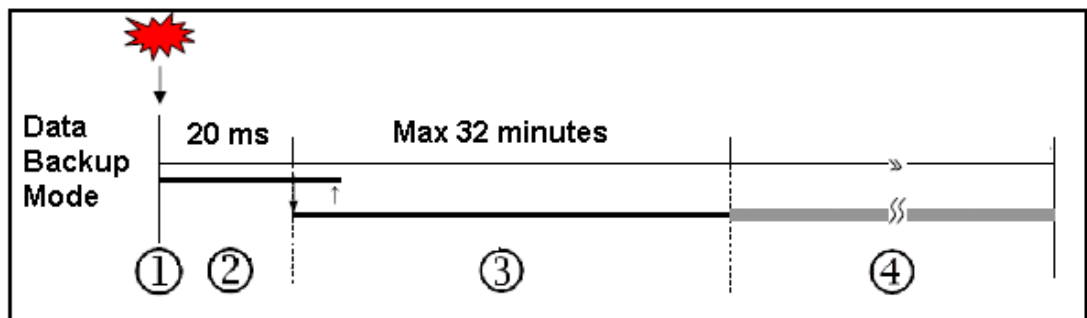

Item	Description
1	Power failure occurs
2	The storage system continues to operate for 20 milliseconds and detects the power failure.
3	The cache memory data and the storage system configuration are backed up to the cache flash memory in the cache backup assemblies. If power is restored during the backup, the backup stops unless the backup batteries are used to less than 50%. In that case, the system operates in write-through mode until the batteries are charged enough for a full backup.
4	Data is stored in the cache flash memory until power is restored. then it is written to the drives.


Cache backup batteries

In the event of a power failure, nickel metal- hydride batteries are used to keep the cache memory alive while the storage system configuration and data in the cache is copied to the flash memory (SSD) in the cache backup

modules. The batteries are located in the cache backup modules. They are fully charged at the distribution center where the storage system is assembled and tested. During shipment, the batteries are automatically disconnected. This prevents them from discharging during shipping and storage until the system is installed. During installation, they are reconnected.



Note: When the system is running, it generates a SIM when the cache backup batteries are not connected.

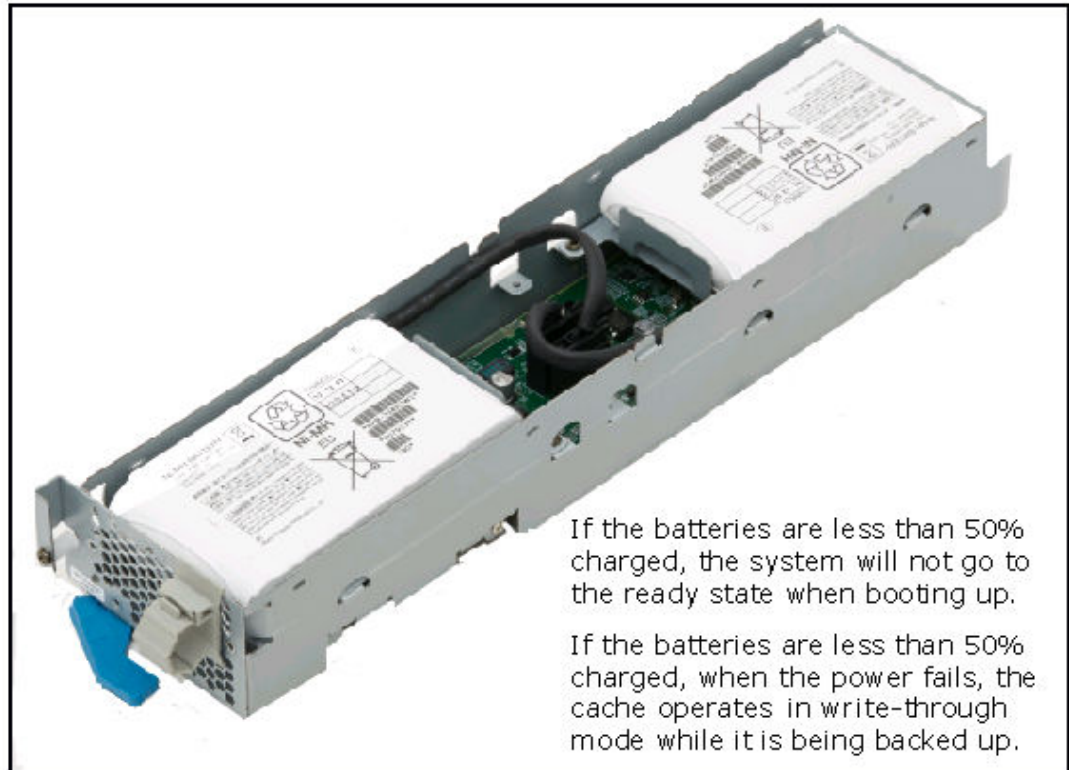

Battery life

The batteries have a lifespan of three years, and will hold a charge for that time when disconnected. When the batteries are connected and power is on, they are charged continuously. This occurs during both normal system operation and while the system is in idle mode.

When the batteries are connected and the power is off, the batteries slowly discharge. They will have a charge of less than 50% after two weeks without power. When fully discharged, the batteries must be connected to power for three hours to fully recharge.



Note: The storage system generates a SIM when the cache backup batteries are not charged to at least 50%. The LEDs on the front panel of the cache backup kits also show the status of the batteries.

Storing the system

While connected, the cache backup batteries will completely discharge in two to three weeks without power applied. If you do not use a VSP G1000 for two weeks or more, ask technical support to move the batteries to a storage system that is being used, or turn the storage system on to idle mode for at least 3 hours once every two weeks.

If you store the system for more than two weeks and do not disconnect the cache backup batteries, when you restart the system, the batteries will need to charge for at least 90 minutes before the cache will be protected. To prevent the batteries from discharging during long term storage, call technical support and ask them to disconnect the battery jumpers on the cache boards.

Troubleshooting

This chapter provides troubleshooting information for the VSP G1000 storage system storage system.

- ☐ [Getting help](#)
- ☐ [Solving problems](#)
- ☐ [Service information messages](#)

Getting help

If you have difficulty with any of the procedures included in this chapter, or if a procedure does not provide the answer or results you expect, contact Hitachi Data Systems Support at https://support.hds.com/en_us/contact-us.html.

Solving problems

The VSP G1000 storage system storage system is highly reliable and is not expected to fail in any way that would prevent access to user data. The READY LED on the control panel must be ON when the storage system is operating online.

The following table lists possible error conditions and provides recommended actions to resolve each condition. If you are unable to resolve an error condition, contact your Hitachi Data Systems representative, or contact Hitachi Data Systems Technical Support for assistance.

Table 31 Troubleshooting

Error Condition	Recommended Action
Error message displayed.	Determine the type of error (refer to the SIM codes section. If possible, remove the cause of the error. If you cannot correct the error condition, call the support center for assistance.
General power failure	Turn off all PDU switches and breakers. After the facility power comes back on steady, turn them back on and power the system up. See Chapter 4 for instructions. If needed, call Hitachi Data Systems support for assistance.
Fence message is displayed on the console.	Determine if there is a failed storage path. If so, toggle the RESTART switch, and retry the operation. If the fence message is displayed again, call the support center for assistance.
READY LED does not go on, or there is no power supplied.	Call the support center for assistance. WARNING: Do not open the VSP G1000 control frame/controller or touch any of the controls.
ALARM LED is on.	If there is a temperature problem in the area, power down the storage system, lower the room temperature to the specified operating range, and power on the storage system. Call the support center if needed for assistance with power off/on operations. If the area temperature is not the cause of the alarm, call the support center for assistance.

Service information messages

The VSP G1000 generates service information messages (SIMs) to identify normal operations. For example, TrueCopy pair status change, as well as service requirements and errors or failures. For assistance with SIMs, call the support center.

SIMs can be generated by the front-end directors, back-end directors, and by the SVP. All SIMs generated by the VSP G1000 are stored on the SVP for use by Hitachi Data Systems personnel, displayed by the Device Manager - Storage Navigator software, and reported over SNMP to the open-system host. The SIM display on Storage Navigator enables users to remotely view the SIMs reported by the attached storage systems. Each time a SIM is generated, the amber Message LED on the control panel turns on. The Hi-Track remote maintenance tool also reports all SIMs to the support center

SIMs are classified according to severity. There are four levels: service, moderate, serious, or acute. The service and moderate SIMs (lowest severity) do not require immediate attention and are addressed during routine maintenance. The serious and acute SIMs (highest severity) are reported to the host system once every eight hours.



Note: If a serious or acute-level SIM is reported, call the support center immediately to ensure that the problem is being addressed.

The following figure illustrates a typical 32-byte SIM from the VSP G1000 storage system. SIMs are displayed by reference code (RC) and severity. The six-digit RC, which is composed of bytes 22, 23, and 13, identifies the possible error and determines the severity. The SIM type, located in byte 28, indicates which component experienced the error.

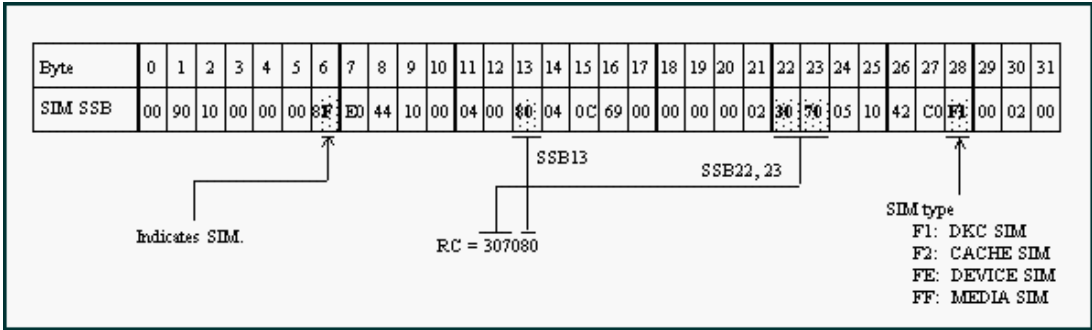


Figure 40 Service information message

Specifications

This appendix provides the mechanical, electrical, and environmental specifications for the Hitachi Virtual Storage Platform G1000 storage system.

- ☐ [System specifications](#)
- ☐ [Mechanical specifications](#)
- ☐ [Electrical specifications](#)
- ☐ [Environmental specifications](#)
- ☐ [PDU specifications](#)

System specifications

The following table lists the system specifications of the VSP G1000 storage system.

Table 32 VSP G1000 system specifications

Item	System specifications (2 controllers, 6 racks)	
System	Maximum storage capacity	4,000 TB (2,304 x 1.8TB SFF HDD used)
		6,767 TB (1,152 x 6TB LFF HDD used)
	Number of disk drives	Min: 4 (disk-in model) 0 (diskless model) Max: 2,304 (2.5-in HDD) 1,152 (3.5-in HDD) 576 (flash module drives)
	Maximum number of SSDs	384 ¹
	Maximum number of spare drives	96 ²
	Maximum number of LDEVs / volumes	65,280
	Supported RAID Levels and RAID group configurations	RAID1: 2D+2D, 4D+4D RAID5: 3D+1P, 7D+1P RAID6: 6D+2P, 14D+2P
	Internal path	Architecture: Hierarchical Star Net
	Maximum Bandwidth:	Cache Path = 768 GB/s Control Path = 128 GB/s
Memory capacity Minimum 64 GB per system	Cache memory, one controller	16 GB DIMMs: 64 GB to 512 GB 32 GB DIMMs: 64 GB to 1 TB
	Cache memory, two controllers	16 GB DIMMs: 64 GB to 1 TB 32 GB DIMMs: 64 GB to 2TB minimum 32 GB per controller
	Cache flash memory (SSD), one controller	Small kit: 256 GB to 512 GB large kit: 512 GB to 1 TB ³
	Cache flash memory (SSD), two controllers	Small kit: 512 GB to 1 TB large kit: 1 TB to 2 TB ³

Item	System specifications (2 controllers, 6 racks)		
Maximum number of front-end director ports supported by feature type		Diskless configuration	Non-diskless configuration
	16 port, 16Gbps Fibre Channel FED	192	176
	8 port, 16Gbps Fibre Channel FED	96	88
	16 port, 16Gbps Fibre Channel FED	192	176
	16 port, 16Gbps FICON FED – Longwave	176	176
	16 port, 16Gbps FICON FED – Shortwave	176	176
	16 port, 8Gbps FICON FED – Longwave	176	176
	16 port, 8Gbps FICON FED – Shortwave	176	176
	16 port, 10Gbps Fibre Channel over Ethernet FED	192	176
Device I/F	Controller chassis-drive chassis Interface	SAS/Dual Port	
	Maximum number of HDD per SAS I/F with the SFF HDD Standard Model	288	
	Number of back end directors	8 (4 pairs)	
Channel I/F	Mainframe	16-port, 8Gbps FICON (Long or Short Wavelength) 16-port, 16Gbps FICON (Long or Short Wavelength)	
	Open systems	16-port, 8Gbps Fibre Channel FED supports: 2/4/8Gbps Fibre Short Wavelength 8-port, 16Gbps Fibre Channel FED supports: 4/8/16Gbps Fibre Short Wavelength 16-port, 16Gbps Fibre Channel FED supports 4/8/16Gbps	
		16-port, 10Gbps FCoE FED, shortwave (550m)	
		Max number of back-end directors	8 (4 pairs)
	Supported drives	See Table 33 Drive specifications on page 136 .	
VSD cores	Quantity	8 cores per MP, 16 per VSD pair 128 cores max total per system	
Component configuration	front-end director features (2 blades each)	1 min; 12 per system maximum ⁴	
minimum / maximum	back-end director features (2 blades each)	0 min for a diskless configuration; 4 pairs max per system	

Item	System specifications (2 controllers, 6 racks)	
	Cache (2 blades each), per controller	1 min, 2 max
	Switches/CSW, per controller	1 min, 2 max
Power requirements (see Table 35 VSP G1000 mechanical specifications on page 138 and Table 36 VSP G1000 input power specifications on page 139 for details)	Single phase to storage system components. Single or three phase to PDU input. Input voltage varies by location.	60Hz: 200V to 240V 50Hz: 200V to 240V
Acoustic level ⁷	Operating, controller chassis	58dB at 24°C or less 62dB at 89.6°F / 32°C 70dB at 104°F / 40°C
	Operating, SFF / LFF	61dB at 24°C or less 60dB at 89.6°F / 32°C 70dB at 104°F / 40°C
	Idle ⁸ , controller chassis	58dB at 24°C or less 62dB at 89.6°F / 32°C 70dB at 104°F / 40°C
	Idle, SFF / LFF	61dB at 24°C or less 64dB at 89.6°F / 32°C 70dB at 104°F / 40°C
Notes: <ol style="list-style-type: none"> Does not include spare drives. Available as spare or active drives. 128 GB SSDs can be installed in the large kits to make upgrades easier. All front-end director configuration, no back-end directors (diskless system) Zero back-end directors in a diskless configuration, one back-end director (2 blades) min if drives are installed. See Table 36 VSP G1000 input power specifications on page 139. Measurement Condition: The point 1m far from floor and surface of the product. When the VSP G1000 is idle, the cooling fans are running. 		

Table 33 Drive specifications

Drive Type	Size (inches) ¹	Drive Capacity	Speed (RPM)
HDD (SAS)	3.5	4.0 TB, 6.0 TB ⁶	7,200
		600 GB	10,000
	2.5	300 GB, 600 GB	15,000
	2.5	600 GB, 900 GB, 1.2 TB, 1.8 TB	10,000

Drive Type	Size (inches) ¹	Drive Capacity	Speed (RPM)
SSD (MLC SAS) 2	2.5	400 GB, 800 GB	n/a
	3.5	400 GB	n/a
Flash Module (MLC)	5.25	1.6 TB, 3.2 TB, 6.4 TB	n/a
Drive Installation Guidelines			
<ul style="list-style-type: none"> Minimum of four drives must be installed Drives must be added in groups of 4, 8, or 16 at a time to create RAID groups, unless they are spare drives Use the same generation drive type and capacity size when configuring RAID setting Add or replace a drive with another drive of the same generation. Follow the listed examples: <ul style="list-style-type: none"> Array group consisting of 1.6TB Hitachi Accelerated Flash (HAF) requires the same generation 1.6TB HAF drive as a spare Array group consisting of 3.2TB HAF requires the same generation 3.2TB HAF drive as a spare Array group consisting of HAF DC2 1.6TB HAF requires the same generation HAF DC2 1.6TB HAF drive as a spare Array group consisting of HAF DC2 3.2TB HAF requires the same generation HAF DC2 3.2TB HAF drive as a spare Array group consisting of HAF DC2 6.4TB HAF requires the same generation HAF DC2 6.4TB HAF drive as a spare 			
Maximum Number of Drives			
Drive type (inches)	Drive chassis	Max per drive chassis	Max per 2-controller system
HDD, 2.5	SFF	192	2,304
HDD, 3.5	LFF	96	1,152
FMD, 5.25 ³	FMD	48	576
SSD, 2.5	SFF	192	384 ⁴
Spare drives ⁵		48	96
Notes: <ol style="list-style-type: none"> The LFF drive chassis uses 3.5-inch drives. The SFF drive chassis uses 2.5-inch drives. SFF SSD drives can be mounted all in one SFF drive chassis or spread out among all of the SFF drive chassis in the storage system. Guidelines for operating with flash module drives in high temperature mode: <ul style="list-style-type: none"> Do not enable high temperature mode if the system contains FMDs from an earlier generation (prior to HAF DC2 FMDs). The early generation FMDs are not designed to operate in high temperature mode. Only enable high temperature mode with Hitachi Accelerated Flash DC2 FMDs. Do not enable high temperature mode if the system contains a mixture of early and current generation FMDs. Recommended maximum number. Recommended number of spare drives: one spare HDD drive per set of 32 HDDs and one spare SSD per set of 32 SSDs. Recommended number of spare drives for 6 TB LFF drive only: one spare drive per set of 16. 			

Table 34 Maximum cable length (short wave)

Data Transfer Rate	OM2(50/125 f/m multi-mode fiber)	OM3(50/125 f/m laser optimized multi-mode fiber)	OM4(50/125 f/m laser optimized multi-mode fiber)
MB/s	feet / meters	feet / meters	feet / meters
200	984.3 / 300	1640.4 / 500	-
400	492.1 / 150	1246.7 / 380	1312.4 / 400

Data Transfer Rate	OM2(50/125 f/m multi-mode fiber)	OM3(50/125 f/m laser optimized multi-mode fiber)	OM4(50/125 f/m laser optimized multi-mode fiber)
MB/s	feet / meters	feet / meters	feet / meters
800	164 / 50	492.1 / 150	623.4 / 190
1600	36	100	410.1 / 125

Mechanical specifications

The following table lists the mechanical specifications of the VSP G1000 storage system.



Note: The current and power specifications in the following tables were measured on a VSP G1000 system in a controlled environment. To calculate the power draw, current draw, and heat output of a specific system, see [Table 17 VSP G1000 component specifications on page 80](#) or (easier) use the Power and Weight calculator at the following URL.

<http://www.hds.com/go/weight-and-power-calculator/>

If you need assistance using this tool, contact Hitachi Data Systems Support at https://support.hds.com/en_us/contact-us.html.

Table 35 VSP G1000 mechanical specifications

Dimension	Single Rack	Single Controller (3 racks)	Dual Controller (6 racks)
Width (inches / mm)	21.6 / 600	70.9 / 1,800	141.7 / 3,600
Depth (inches / mm)	47.2 / 1,200	47.2 / 1,200	47.2 / 1,200
Height (inches / mm)	79.1 / 2,010	79.1 / 2,010	79.1 / 2,010
System Weight	Single Rack	Single Controller (3 racks)	Dual Controller (6 racks)
(lbs / kg)	Diskless 1 controller 638 / 290 2 controllers 983 / 446	-	-
Max (lbs / kg)	1,301 / 591 384 SFF drives	3,214 / 1,461 1,152 SFF drives	6,418 / 2,917 2,304 SFF drives
Max (lbs / kg)	1,268 / 578 192 LFF drives	3,181 / 1,446 576 LFF drives	6,362 / 2,892 1,152 LFF drives


Electrical specifications

The VSP G1000 storage system PDUs can use single phase or three phase AC power. The system components use single phase 220 VAC.

Table 36 VSP G1000 input power specifications

Item	Input Power to PDUs	Input Current ₁	Steady Current ₂	Leakage Current	Inrush Current		
					1st (0-p)	2nd (0-p)	1st (0-p) Time (-25%)
DKC PS	AC, single phase	7.18A	3.59A	0.28 mA	20A	15A	80ms
UBX PS	2 pole + ground 200 V -8% min 240 V +6% max ³	2.07A	1.04A	1.75mA	25A	20A	150ms
SBX PS		2.61A	1.31A	1.75mA	25A	20A	150ms
FBX PS		0.28A	1.42A	28mA	20A	10A	80ms
Notes: 1. The maximum current in case AC input is not a redundant configuration (in case of 184V [200V -8%]). 2. The maximum current in case AC input is a redundant configuration (in case of 184V [200V -8%]). 3. 110/120 VAC system is not supported							

Power Supply Locations

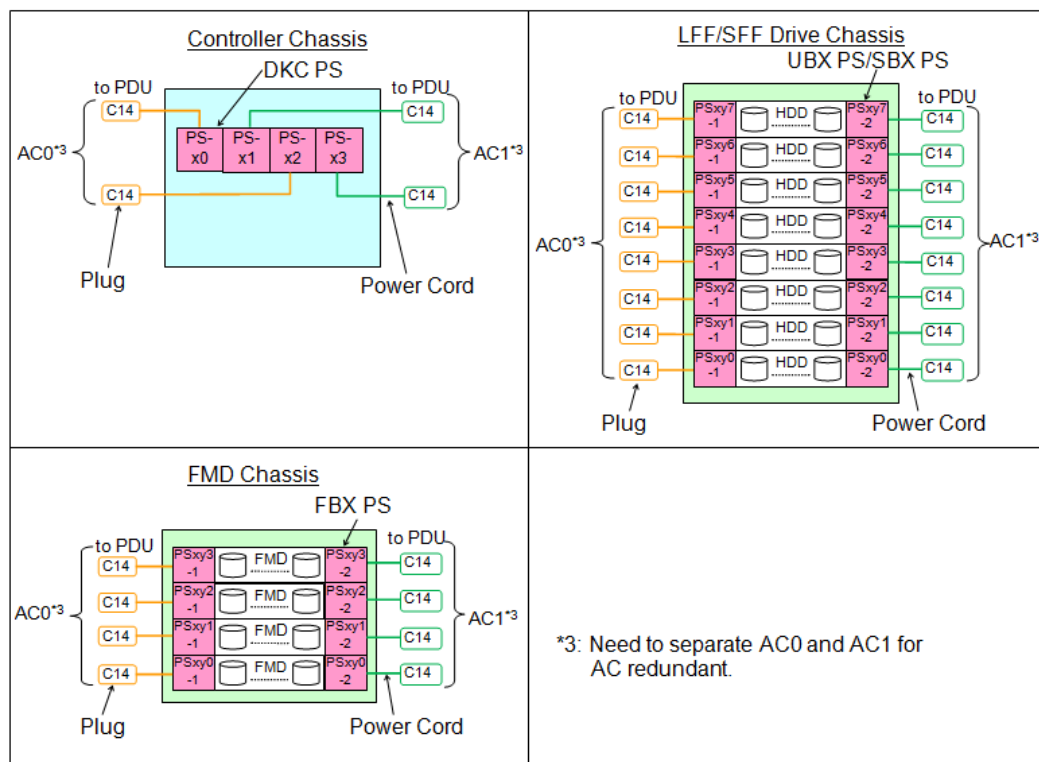

Note: Depending on the configuration, the VSP G1000 storage system may draw considerably less power than the rating of the PDU plugs. Use the weight and power calculator to determine the power draw for a specific system. See the note under [Electrical specifications on page 77](#).

Table 37 PDU plugs, circuit breakers, and receptacles

Phase	Location	PDU Plug	Operating / Max Voltage Rating	Max Current Rating	No. of CB per PDU	Breaker Rating
Single See note 2	Americas PDU-12111 2F10	NEMA L6 30P twistlock 2 pole, 3 wire A + B + gnd	208 VAC	30 A	2 UL489	16 A, 20 A trip
	EMEA, APAC A3CR-1232 94-51	IEC 309, blue 2 pole, 3 wire A + B + gnd	230 VAC / 250 VAC	32 A	2 UL489	16 A, 20 A trip
Three See	Americas PDU-32C13 800F10	NEMA L15 30P 3 pole, 4 wire	208 VAC / 240 VAC	30 A per phase	3 UL489	15 A 2 pole

Phase	Location	PDU Plug	Operating / Max Voltage Rating	Max Current Rating	No. of CB per PDU	Breaker Rating
note 3		A + B + C + gnd				
	EMEA, APAC A3CK-2436 94-50	IEC 309, red 4 pole, 5 wire A + B + C + Neut + gnd	400 VAC	32 A per phase	3 UL489	16 A 2 pole
Notes: 1. The numbers in this table were taken from the PDU manufacturer's specifications. Detailed PDU specifications are located in Appendix C. See PDU specifications on page 142 2. Americas: Single phase, 30 Amp PDU, (12) IEC C13 EMEA/APAC: Single phase, 32 Amp PDU, (12) IEC C13; (2) IEC C19 3. Americas: Methode three phase, 30 Amp PDU, (24) IEC C13; (6) IEC C19 EMEA/APAC: Minkels three phase, 32 Amp PDU, (24) IEC C13; (6) IEC C19;						

Environmental specifications

The following table lists the specifications of the environmental conditions needed to support the VSP G1000 storage system. Differences between standard and high temperature modes are indicated when appropriate.

Table 38 VSP G1000 environmental specifications

Item	Operating ¹	Not Operating ²	Shipping & Storage ³
Temperature	60.8 to 89.6 / 16 to 32	-14 to 109.4 / -10 to 43	-13 to 140 / -25 to 60
Standard temperature mode (°F / °C)		-14 to 95 / -10 to 35 ⁴	
Temperature	60.8 to 104 / 16 to 40	-14 to 109.4 / -10 to 43	-13 to 140 / -25 to 60
high temperature mode (°F / °C)			
Relative Humidity (%) ⁵	20 to 80	8 to 90	5 to 95
Max. Wet Bulb (°F / °C)	78.8 / 26	80.6 / 27	84.2 / 29
Temperature deviation per hour) (°F / °C)	50 / 10	50 / 10	68 / 20
Altitude	-200 ft. / -60 m to		-
Standard temperature mode:	9842 ft. / 3,000 m		
Altitude	-200 ft. / -60 m to		
high temperature mode:	4920 ft. / 1,500 m		

Item	Operating ¹	Not Operating ²	Shipping & Storage ³
Vibration ⁶	5 to 10Hz: 0.25 mm 10 to 300Hz: 0.49m/s ²	5 to 10Hz: 2.5mm 10 to 70Hz: 4.9m/s 270 to 99Hz: 0.05 mm 99 to 300Hz: 9.8m/s ²	Sine Vibration: 4.9m/s ² , 5min. At the resonant frequency with the highest displacement found between 3 to 100Hz ⁷ Random Vibration: 0.147m ² /s ³ , 30min, 5 to 100Hz ⁷
Shock	No impact	78.4m/s ² (8.0G) 15ms	Horizontal: Incline Impact 1.22m/s ⁸ Vertical: Rotational Edge 0.15m ¹⁰
Dust	Less than 0.15 mg per cubic meter of air	-	-
Notes: <ol style="list-style-type: none"> 1. Environmental specification for operation should be met before the storage system is powered on. Maximum temperature of 90°F / 32°C at air system air inlet should be strictly met. 2. Unless otherwise specified, non-operating condition includes both packing and unpacking conditions. 3. The system and components should be packed in factory packing for shipping and storing. 4. Applies only when flash module drives are installed 5. No condensation in and around the drives should be observed under any conditions. 6. Vibration specifications are applied to all three axes 7. See ASTM D999-01 The Methods for Vibration Testing of Shipping Containers. 8. See ASTM D4728-01 Test Method for Random Vibration Testing of Shipping Containers. 9. See ASTM D5277-92 Test Method for Performing Programmed Horizontal Impacts Using an Inclined Impact Tester. 10. See ASTM D6055-96 Test Methods for Mechanical Handling of Unitized Loads and Large Shipping Cases and Crates. 			

Table 39 VSP G1000 system noise levels

Noise levels (controller chassis)			
	Temperature (°F /°C)	Fan speed (RPM)	Noise level (dB)
Standard temperature mode	60.8 to 77 / 16 to 25	4200	57.4
	77 to 89.6 25 to 32	4700	59.5
	89.6 to 104 32 to 40	7400	69.3

PDU specifications

For information about PDUs, refer to the *Hitachi Universal V2 Rack Reference Guide*.

System option modes

This appendix lists and describes the public system option modes.

- ☐ [System option modes](#)
- ☐ [SOM details](#)

System option modes

To provide greater flexibility and enable the VSP G1000 to be tailored to unique customer operating requirements, additional operational parameters, or system option modes, are available. At installation, the modes are set to their default values, as shown in the following table. Be sure to discuss these settings with your Hitachi Data Systems team if you think changes should be made. The system option modes can only be changed by a Hitachi Data Systems representative.

The following tables provide information about system option modes and SVP operations:

- [Table 40 System option modes on page 145](#) lists the public system option mode information for VSP G1000. These can be used as needed.
- [Table 41 SOM 15 functions on page 180](#) specifies the details of mode 15.
- [Table 42 SOM 122 pairsplit operations on page 180](#)
- [Table 43 SOM 122 pairresync operations on page 181](#)
- [Table 44 SOM 269: SVP operations on page 182](#) specifies the details of mode 269 for SVP operations.
- [Table 47 SOM 784 operational specifications on page 183](#)
- [Table 46 SOM 729 behavior on page 182](#)
- [Table 47 SOM 784 operational specifications on page 183](#)
- [Table 48 SOM 803 behavior on page 183](#)
- [Table 49 SOM 855 behavior with SOM 467 on page 183](#)
- [Table 50 Relations among SOM897, SOM898, and SOM901 on page 183](#)
- [Table 51 Relations between SOM930, SOM755 and SOM859 on page 184](#)

The following tables were up to date at the time this manual was published. However, the system option mode information may change in firmware releases that may happen before the next release of this manual. Contact Hitachi Data Systems support for the latest information on the VSP G1000 system option modes.

The system option mode information includes:

- **Mode:** Specifies the system option mode number.
- **Category:** Indicates the functions to which the mode applies.
- **Description:** Describes the action or function that the mode provides.
- **Default:** Specifies the default setting (ON or OFF) for the mode.
- **MCU/RCU:** For remote functions, indicates whether the mode applies to the main control unit (MCU) and/or the remote control unit (RCU).

Table 40 System option modes

Mode	Category	Description	Default	MCU/RCU
15	Common	<p>This mode can reduce the host response time from 15 seconds to 6 seconds or less.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is used on a storage system where slow or delayed drive response may affect business operations. 2. When Dynamic Sparing or Auto Correction Mode is used, I/O watching time is 30 sec even when the mode is set to ON. This is because host I/Os conflict with copy processing, 3. Do not use this mode when SATA HDDs are used in a VSP G1000 system. 4. When SOM771 or SOM797 is supported by a VSP G1000 system and HM700 is set to ON, the setting of SOM771/797 is prioritized for read I/O watching time. 5. For relations with other system option modes, see the SOM 015 sheet. 6. When this mode is applied, SOM142 is disabled. 7. When you set this mode to ON, also set SOMs 807, 498, and 076 to ON. If these SOMs are not set to ON, the performance may not reach the expected level. 	OFF	-
20	Public (Optional)	R-VOL read only function.	OFF	MCU
22	Common	<p>Regarding the correction copy or the drive copy, in case ECCs/LRC PINs are set on the track of copy source HDD, mode 22 can be used to interrupt the copy processing (default) or to create ECCs/LRC PINs on the track of copy target HDD to continue the processing.</p> <p>Mode 22 = ON:</p> <p>If ECCs/LRC PINs (up to 16) have been set on the track of copy source HDD, ECCs/LRC PINs (up to 16) will be created on the track of copy target HDD so that the copy processing will continue.</p> <p>If 17 or more ECCs/LRC PINs are created, the corresponding copy processing will be interrupted.</p> <p>Mode 22 = OFF (default)</p> <p>If ECCs/LRC PINs have been set on the track of copy source HDD, the copy processing will be interrupted. (first recover ECCs/LRC PINs by using the PIN recovery flow, and then perform the correction copy or the drive copy again)</p> <p>One of the controlling option for correction/drive copy.</p>	OFF	None
36	HRC	Sets default function (CRIT=Y) option for SVP panel (HRC).	OFF	MCU
64	TrueCopy for Mainframe	<p>Mode 64 = ON:</p> <ul style="list-style-type: none"> • When receiving the Freeze command, in the subsystem, pair volumes that fulfill the conditions below are suspended and the status change pending 		

Mode	Category	Description	Default	MCU/RCU
		<p>(SCP) that holds write I/Os from the host is set. The path between MCU and RCU is not deleted. Query is displayed only but unusable.</p> <ul style="list-style-type: none"> When receiving the RUN command, the SCP status of the pairs that fulfill the conditions below is released. When a Failure Suspend occurs when Freeze Option Enable is set, except the pair in which the Failure Suspend occurs, other pairs that fulfill conditions below go into SCP state: - TrueCopy Sync M-VOL- Mainframe Volume- Pair status: Duplex/Pending <p>Mode 64 = OFF (default):</p> <ul style="list-style-type: none"> When receiving the Freeze command, pairs that fulfill the conditions below are suspended and the SCP is set. In the case of CU emulation type 2105/2017, the path between MCU and RCU is deleted, while the path is not deleted but unusable with Query displayed only in the case of CU emulation type 3990. When receiving the RUN command, the SCP status of the pairs that fulfill the conditions below is released. When a Failure Suspend occurs while the Freeze Option Enable is set, except the pair in which the Failure Suspend occurs, other pairs that fulfill the conditions below go into SCP state. <p>Conditions:</p> <ul style="list-style-type: none"> TrueCopy Sync M-VOL Mainframe Volume Pair status: Duplex/Pending A pair whose RCU# is identical to the RCU for which the Freeze command is specified. <p>Notes:</p> <ol style="list-style-type: none"> When all the following conditions are met, set Mode 64=ON. When all the following conditions are met, set Mode 64=ON. <ul style="list-style-type: none"> Customer requests to stop the update I/O operation to the RCU of a TrueCopy for Mainframe pair for the whole subsystem. Disaster Recovery function such as GDPS, HyperSwap, or Fail Over/ Fail Back, which requires compatibility with IBM storage, is not used as this Mode 64 operates without having compatibility with IBM storage. Only Peer-to-Peer-Remote-Copy operation. (Do not use it in combination with Business Continuity Manager.) Even though the Failover command is not an applicable criterion, when executing the Failover command while Mode 114 is ON, since ports are not automatically switched, the Failover command fails. With increase of Sync pairs in subsystem, the time period to report the completion of Freeze command and RUN command gets longer (estimate of time to report completion: 1 second per 1000 pairs), and MIH may occur. 		

Mode	Category	Description	Default	MCU/RCU
80	ShadowImage	<ul style="list-style-type: none"> For RAID 300/400/450 (SI for OPEN or Mainframe) In response to the Restore instruction from the host or Storage Navigator, the following operation is performed regardless of specifying Quick or Normal. For RAID 500/600/700 (SI for OPEN) In response to the Restore instruction from the host, if neither Quick nor Normal is specified, the following operation is performed <p>Mode 80 = ON:</p> <p>Normal Restore / Reverse Copy is performed.</p> <p>Mode 80 = OFF:</p> <p>Quick Restore is performed.</p> <p>Notes:</p> <ol style="list-style-type: none"> This mode is applied when the specification for Restore of SI is switched between Quick (default) and Normal. The performance of Restore differs depending on the Normal or Quick specification. 	OFF	-
87	ShadowImage	<p>Determines whether NormalCopy or QuickResync, if not specified, is performed at the execution of pairresync by CCI.</p> <p>Mode 87 = ON:</p> <p>QuickResync is performed.</p> <p>Mode 87 = OFF:</p> <p>NormalCopy is performed.</p>	OFF	-
104	HRC	Changes the default CGROUP Freeze option.	OFF	MCU
114	HRC	<p>This mode enables or disables the LCP/RCP port to be automatically switched over when the PPRC command ESTPATH/DELPATH is executed.</p> <p>Mode 114 = ON:</p> <p>Automatic port switching during ESTPATH/DELPATH is enabled.</p> <p>Mode 114 = OFF (default):</p> <p>Automatic port switching during ESTPATH/DELPATH is disabled.</p> <p>Notes:</p> <ol style="list-style-type: none"> If you select an incorrect port while the mode is set to ON, and if ESTPATH is executed when no logic path exists, the port is switched to RCP. Set this mode to OFF before using TPC-R (IBM software for disaster recovery). 	OFF	MCU
122	ShadowImage	<p>For Split or Resync request from the Mainframe host and Storage Navigator,</p> <p>Mode 122 = ON:</p>	OFF	-

Mode	Category	Description	Default	MCU/RCU
		<ul style="list-style-type: none"> By specifying Split or Resync, Steady/Quick Split or Normal/Quick Resync is respectively executed in accordance with Normal/Quick setting <p>Mode 122 = OFF (default):</p> <ul style="list-style-type: none"> By specifying Split or Resync, Steady/Quick Split or Normal/Quick Resync is respectively executed in accordance with Normal/Quick setting. For details, see "SOM 122" sheet <p>Notes:</p> <ol style="list-style-type: none"> For RAID500 and later models, this mode is applied to use scripts etc that are used on RAID400 and 450 In the case of RAID500 and later models, executing the pairresync command from RAID Manager may be related to the SOM 087 setting. When performing At-Time Split from RAID Manager <ul style="list-style-type: none"> Set this mode to OFF in the case of RAID450 Set this mode to OFF or specify the environment variable HORCC_SPLT for Quick in the case of RAID500 and later. Otherwise, Pairsplit may turn timeout. The mode becomes effective after specifying Split/Resync following the mode setting. The mode function does not work if it is set during the Split/Resync operation. 		
187	Common	Yellow Light Option (only for XP product)	OFF	-
190	HRC	TCz – Allows you to update the VOLSER and VTOC of the R-VOL while the pair is suspended if both mode 20 and 190 are ON	OFF	RCU
269	Common	<p>High Speed Format for CVS (Available for all dku emulation type)</p> <ol style="list-style-type: none"> High Speed Format support When redefining all LDEVs included in an ECC group using Volume Initialize or Make Volume on CVS setting panel, LDEV format, as the last process, will be performed in high speed. Make Volume feature enhancement In addition, with supporting the feature, the Make Volume feature (recreating new CVs after deleting all volumes in a VDEV), which so far was supported for OPEN-V only, is available for all emulation types. <p>Mode 269 = ON:</p> <p>The High Speed format is available when performing CVS operations on Storage Navigator or performing LDEV formats on the Maintenance window of the SVP for all LDEVs in a parity group.</p> <p>Mode 269 = OFF (default):</p> <p>As usual, only the low speed format is available when performing CVS operations on Storage Navigator. In addition, the LDEV specifying format on the Maintenance window of the SVP is in low speed as well.</p>	OFF	MCU/RCU

Mode	Category	Description	Default	MCU/RCU
		Notes: <ol style="list-style-type: none"> For more details about mode 269, see worksheet "Mode269 detail for RAID700". Mode 269 is effective only when using the SVP to format the CVS. 		
292	HRC	<p>Issuing OLS when Switching Port</p> <p>In case the mainframe host (FICON) is connected with the CNT-made FC switch (FC9000 etc.), and is using along with the TrueCopy S/390 with Open Fibre connection, the occurrence of Link Incident Report for the mainframe host from the FC switch will be deterred when switching the CHT port attribute (including automatic switching when executing CESTPATH and CDELPATH in case of Mode 114=ON).</p> <p>Mode 292=ON:</p> <p>When switching the port attribute, issue the OLS (100ms) first, and then reset the Chip.</p> <p>Mode 292=OFF (default):</p> <p>When switching the port attribute, reset the Chip without issuing the OLS.</p>	OFF	MCU/RCU
305	Mainframe	<p>This mode enables the pre-label function (creation of VTOC including VOLSER).</p> <p>Mode 305 = ON:</p> <p>Pre-label function is enabled</p> <p>Notes:</p> <ol style="list-style-type: none"> Set SOM 305 to ON before performing LDEV Format for a mainframe volume if you want to perform OS IPL (volume online) without fully initializing the volume after the LDEV Format. However, full initialization is required in actual operation. Processing time of LDEV format increases by as much as full initialization takes. The following functions and conditions are not supported. <ul style="list-style-type: none"> Quick format 3390-A (Dynamic Provisioning attribute) Volume Shredder Full initialization is required in actual operation. 	OFF	MCU/RCU
308	TrueCopy for Mainframe Universal Replicator for Mainframe	<p>SIM RC=2180 option</p> <p>SIM RC=2180 (RIO path failure between MCU and RCU) was not reported to host. DKC reports SSB with F/M=F5 instead of reporting SIM RC=2180 in the case. Micro-program has been modified to report SIM RC=2180 with newly assigned system option Mode as individual function for specific customer.</p> <p>Mode 308 = ON</p>	OFF	MCU

Mode	Category	Description	Default	MCU/RCU
		<p>SIM RC 2180 is reported which is compatible with older Hitachi specification</p> <p>Mode 308 = OFF</p> <p>Reporting is compatible with IBM - Sense Status report of F5.</p>		
310	Common	<p>Mode 310 = ON:</p> <p>The monitoring timer for MP hang-up is 6 seconds and returning a response to the host within 8 is guaranteed.</p> <p>Mode 310 = OFF (default):</p> <p>The monitoring timer for MP hang-up remains 15 seconds (RAID500/RAID600) or 8 seconds (RAID700/RAID800/HM700).</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode applies to a site where strict host response performance is required. 2. If a hardware failure occurs when the mode is set to ON, the time until MPB blockage is determined is shorter than usual. 	OFF	
448	Universal Replicator Universal Replicator for Mainframe	<p>Mode 448 = ON: (Enabled)</p> <p>If the SVP detects a blocked path, the SVP assumes that an error occurred, and then immediately splits (suspends) the mirror.</p> <p>Mode 448 = OFF: (Disabled)</p> <p>If the SVP detects a blocked path and the path does not recover within the specified period of time, the SVP assumes that an error occurred, and then splits (suspends) the mirror.</p> <p>Note:</p> <p>The mode 448 setting takes effect only when mode 449 is set to OFF.</p>	OFF	
449	Universal Replicator Universal Replicator for Mainframe	<p>Detecting and monitoring path blockade between MCU and RCU of Universal Replicator/Universal Replicator for z/OS</p> <p>Mode 449 = ON:</p> <p>Detecting and monitoring of path blockade will NOT be performed.</p> <p>Mode 449 OFF (default):</p> <p>Detecting and monitoring of the path blockade will be performed.</p> <p>* Newly shipped DKC will have Mode 449 = ON as default.</p> <p>Note:</p> <p>The mode status will not be changed by the microcode exchange.</p>		

Mode	Category	Description	Default	MCU/RCU
454	Virtual Partition Manager	<p>CLPR (Function of Virtual Partition Manager) partitions the cache memory in the disk subsystem into multiple virtual cache and assigns the partitioned virtual cache for each use. If a large amount of cache is required for a specific use, it can minimize the impact on other uses. The CLPR function works as follows depending on whether SOM 454 is set to ON or OFF.</p> <p>Mode 454 = OFF (default):</p> <p>The amount of the entire destage processing is periodically determined by using the highest workload of all CLPRs (*a). (The larger the workload is, the larger the amount of the entire destage processing becomes.)</p> <p>*a: (Write Pending capacity of CLPR#x) ÷ (Cache capacity of CLPR#x), x=0 to 31</p> <p>CLPR whose value above is the highest of all CLPRs</p> <p>Because the destage processing would be accelerated depending on CLPR with high workload, when the workload in a specific CLPR increases, the risk of host I/O halt would be reduced.</p> <p>Therefore, set Mode 454 to OFF in most cases.</p> <p>Mode 454 = ON:</p> <p>The amount of the entire destage processing is periodically determined by using the workload of the entire system (*b). (The larger the workload is, the larger the amount of the entire destage processing becomes.)</p> <p>*b: (Write Pending capacity of the entire system) ÷ (Cache capacity of the entire system)</p> <p>Because the destage processing would not be accelerated even if CLPR has high workload, when the workload in a specific CLPR increases, the risk of host I/O halt would be increased. Therefore, it is limited to set Mode 454 to ON only when a CLPR has constant high workload and it gives priority to I/O</p>	OFF	
457	Universal Volume Manager	<p>This SOM has two purposes:</p> <p>Mode 457 = ON:</p> <ol style="list-style-type: none"> 1. It activates high speed LDEV Format for External Volumes The high speed LDEV format for external volumes is available by setting system option mode 457 to ON. When SOM 457 is ON, if you select an external volume group and perform an LDEV format, any write processing on the external logical units will be skipped. However, if the emulation type of the external LDEV is a mainframe system, the write processing for mainframe control information only will be performed after the write skip. 2. It provides support for Mainframe Control Block Write. 	OFF	MCU/RCU

Mode	Category	Description	Default	MCU/RCU
		<p>The high speed LDEV format for external volumes is supported. Control Block Write of the external LDEVs in mainframe emulation is supported by Device Manager - Storage Navigator (GUI).</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. If the LDEV is not written with data "0" before performing the function, the LDEV format may fail. 2. After the format processing, make sure to set system option mode 457 to OFF. 		
459	ShadowImage for Mainframe, ShadowImage	<p>When the secondary volume of an SI/SIz pair is an external volume, the transaction to change the status from SP-PEND to SPLIT is as follows:</p> <p>Mode 459 = ON:</p> <p>When creating an SI/SIz pair: The copy data is created in cache memory. When the write processing on the external storage completes and the data is fixed, the pair status will change to SPLIT.</p> <p>Mode 459 = OFF:</p> <p>When creating an SI/SIz pair Once the copy data has been created in cache memory, the pair status will change to SPLIT. The external storage data is not fixed (current spec).</p>	OFF	-
466	Universal Replicator, Universal Replicator for Mainframe	<p>For UR/URz operations it is strongly recommended that the path between main and remote storage systems have a minimum data transfer speed of 100 Mbps. If the data transfer speed falls to 10 Mbps or lower, UR operations cannot be properly processed. As a result, many retries occur and UR pairs may be suspended. Mode 466 is provided to ensure proper system operation for data transfer speeds of at least 10 Mbps.</p> <p>Mode 466 = ON:</p> <p>Data transfer speeds of 10 Mbps and higher are supported. The JNL read is performed with 4-multiplexed read size of 256 KB.</p> <p>Mode 466 = OFF:</p> <p>For conventional operations. Data transfer speeds of 100 Mbps and higher are supported. The JNL read is performed with 32-multiplexed read size of 1 MB by default.</p> <p>Note:</p> <p>The data transfer speed can be changed using the Change JNL Group options.</p>	OFF	
467	ShadowImage, ShadowImage for Mainframe, Compatible FlashCopy® V2, Snapshot, Volume Migration,	<p>For the following features, the current copy processing slows down when the percentage of "dirty" data is 60% or higher, and it stops when the percentage is 75% or higher. Mode 467 is provided to prevent the percentage from exceeding 60%, so that the host performance is not affected.</p>	ON	

Mode	Category	Description	Default	MCU/RCU
	Universal Volume Manager	<p>ShadowImage, ShadowImage for Mainframe, Compatible FlashCopy® V2, Snapshot, Volume Migration, Universal Volume Manager</p> <p>Mode 467 = ON:</p> <p>Copy overload prevention. Copy processing stops when the percentage of "dirty" data reaches 60% or higher. When the percentage falls below 60%, copy processing restarts.</p> <p>Mode 467 = OFF:</p> <p>Normal operation. The copy processing slows down if the dirty percentage is 60% or larger, and it stops if the dirty percentage is 75% or larger.</p> <p>Caution:</p> <p>This mode must always be set to ON when using an external volume as the secondary volume of any of the above-mentioned replication products.</p> <p>Note:</p> <p>It takes longer to finish the copy processing because it stops for prioritizing the host I/O performance.</p>		
471	<p>Copy-on-Write Snapshot</p> <p>(Earlier than 70-05-0x-00/00)</p> <p>Copy-on-Write Snapshot, Hitachi Thin Image</p> <p>(70-05-0x-00/00 or higher)</p>	<p>Since the SIM-RC 601xxx that are generated when the usage rate of Pool used by Snapshot exceeds the threshold value can be resolved by users, basically they are not reported to the maintenance personnel. This option is used to inform maintenance personnel of these SIMs that are basically not reported to maintenance personnel in case these SIMs must be reported to them.</p> <p>SIMs reported by setting the mode to ON are:</p> <ul style="list-style-type: none"> SIM-RC 601xxx (Pool utilization threshold excess) (Earlier than 70-05-0x-00/00) SIM-RC 601xxx (Pool utilization threshold excess)/603000 (SM Space Warning) (70-05-0x-00/00 or higher:) <p>Mode 471 = ON:</p> <p>This kind of SIMs is reported to maintenance personnel.</p> <p>Mode 471 = OFF (default):</p> <p>This kind of SIMs is not reported to maintenance personnel.</p> <p>Note:</p> <p>Set this mode to ON when it is required to inform maintenance personnel of the SIM-RC (*)</p> <p>SIMs reported by setting the mode to ON are:</p> <ul style="list-style-type: none"> SIM-RC 601xxx (Pool utilization threshold excess) (Earlier than 70-05-0x-00/00) SIM-RC 601xxx (Pool utilization threshold excess)/603000 (SM Space Warning) (70-05-0x-00/00 or higher) 	OFF	

Mode	Category	Description	Default	MCU/RCU
474	Universal Replicator, Universal Replicator for Mainframe	<p>UR initial copy performance can be improved by issuing a command from Raid Manager/BC Manager to execute a dedicated script consists of UR initial copy (Nocopy), UR suspend, TC (Sync) initial copy, TC (Sync) delete, and UR resync.</p> <p>Mode 474 = ON:</p> <p>For a suspended UR pair, a TC-Sync pair can be created with the same P-VOL/S-VOL so that UR initial copy time can be reduced by using the dedicated script.</p> <p>Mode 474 = OFF (default):</p> <p>For a suspended UR pair, a TC-Sync pair cannot be created with the same P-VOL/S-VOL. For this, the dedicated script cannot be used.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. Set this mode for both MCU and RCU. 2. When the mode is set to ON: <ul style="list-style-type: none"> • Execute all of pair operations from Raid Manager/BCM. • Use a dedicated script. • Initial copy operation is prioritized over update I/O. Therefore, the processing speed of the update I/O slows down by about 15μs per command. 3. If this mode is set to ON, the processing speed of update I/O slows down by about 15μs per command, version downgrade is disabled, and Take Over is not available. 4. If the mode is not set to ON for both or either sides, the behavior is as follows. <ul style="list-style-type: none"> • Without setting on both sides: Normal UR initial copy performance. • With setting on MCU/without setting on RCU: TC Sync pair creation fails. • Without setting on MCU/with setting on RCU: The update data for P-VOL is copied to the S-VOL in synchronous manner. • While the mode is set to ON, micro-program downgrade is disabled. • While the mode is set to ON, Take Over function is disabled. • The mode cannot be applied to a UR pair that is the 2nd mirror in URxUR multi-target configuration or URxUR cascade configuration. If applied, TC pair creation is rejected with SSB=CBEE output. 	OFF	MCU/RCU
484	TrueCopy for Mainframe ShadowImage for Mainframe	<p>The IBM-compatible PPRC FC path interface has been supported with RAID500 50-06-11-00/00. As the specification of QUERY display using this interface (hereinafter called New Spec) is different from the current specification (hereinafter called Previous Spec), this mode enables to display the PPRC path QUERY with the New Spec or Previous Spec.</p>	OFF	MCU/RCU

Mode	Category	Description	Default	MCU/RCU
		<p>Mode 484 = ON:</p> <p>PPRC path QUERY is displayed with the New Spec.</p> <p>Mode 484 = OFF (default):</p> <p>PPRC path QUERY is displayed with the Previous Spec (ESCON interface).</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. Set this mode to ON when you want to maintain compatibility with the Previous Spec for PPRC path QUERY display under the environment where IBM host function (such as PPRC and GDPS) is used. 2. When an old model or a RAID500 that doesn't support this mode is connected using TCz, set this mode to OFF. 3. If the display specification is different between MCU and RCU, it may cause malfunction of host. 4. When TPC-R is used, which is IBM software for disaster recovery, set this mode to ON. 		
495	NAS	<p>Function:</p> <p>That the secondary volume where S-VOL Disable is set means the NAS file system information is imported in the secondary volume. If the user has to take a step to release the S-VOL Disable attribute in order to perform the restore operation, it is against the policy for the guard purpose and the guard logic to have the user uninvolved. In this case, in the NAS environment, Mode 495 can be used to enable the restore operation.</p> <p>Mode 495 = ON:</p> <p>The restore operation (Reverse Copy, Quick Restore) is allowed on the secondary volume where S-VOL Disable is set.</p> <p>Mode 495 = OFF (default):</p> <p>The restore operation (Reverse Copy, Quick Restore) is not allowed on the secondary volume where S-VOL Disable is set.</p>	OFF	
506	Universal Replicator, Universal Replicator for Mainframe	<p>This option is used to enable Delta Resync with no host update I/O by copying only differential JNL instead of copying all data.</p> <p>The HUR Differential Resync configuration is required.</p> <p>Mode 506 = ON:</p> <p>Without update I/O: Delta Resync is enabled.</p> <p>With update I/O: Delta Resync is enabled.</p> <p>Mode 506 = OFF (default):</p> <p>Without update I/O: Total data copy of Delta Resync is performed.</p>	OFF	MCU/RCU

Mode	Category	Description	Default	MCU/RCU
		<p>With update I/O: Delta Resync is enabled.</p> <p>Note:</p> <p>Even when mode 506 is set to ON, the Delta Resync may fail and only the total data copy of the Delta Resync function is allowed if the necessary journal data does not exist on the primary subsystem used for the Delta Resync operation.</p>		
530	Universal Replicator for Mainframe	<p>When a Universal Replicator for Mainframe pair is in the Duplex state, this option switches the display of Consistency Time (C/T) between the values at JNL restore completion and at JNL copy completion.</p> <p>Mode 530 = ON:</p> <p>- C/T displays the value of when JNL copy is completed.</p> <p>Mode 530 = OFF (default):</p> <p>C/T displays the value of when JNL restore is completed.</p> <p>Note:</p> <p>At the time of Purge suspend or RCU failure suspend, the C/T of Universal Replicator for Mainframe displayed by Business Continuity Manager or Storage Navigator may show earlier time than the time showed when the pair was in the Duplex state.</p>	OFF	RCU
531	Open and Mainframe	<p>When PIN data is generated, the SIM currently stored in SVP is reported to the host.</p> <p>Mode 531 = ON:</p> <p>The SIM for PIN data generation is stored in SVP and reported to the host.</p> <p>Mode 531 = OFF:</p> <p>The SIM for PIN data generation is stored in SVP only, not reported to the host, the same as the current specification.</p>	OFF	MCU/RCU
548	TrueCopy for Mainframe, Universal Replicator for Mainframe, or ShadowImage for Mainframe from BCM	<p>This option prevents pair operations of TCz, URz, or SIz via Command Device online.</p> <p>Mode 548 = ON:</p> <p>Pair operations of TC for z/OS, UR for z/OS, or SI for z/OS via online Command Device are not available. SSB=0x64fb is output.</p> <p>Mode 548 = OFF:</p> <p>Pair operations of TC for z/OS, UR for z/OS, or SI for z/OS via online Command Device are available. SIM is output.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. When Command Device is used online, if a script containing an operation via Command Device has been executed, the script may stop if this option is set to ON. As described in the BCM user's guide, the 		

Mode	Category	Description	Default	MCU/RCU
		<p>script must be performed with Command Device offline.</p> <p>2. This option is applied to operations from BCM that is operated on MVS.</p>		
556	Open	<p>Prevents an error code from being set in the 8 - 11th bytes in the standard 16-byte sense byte.</p> <p>Mode 556 = ON:</p> <p>An error code is not set in the 8 - 11th bytes in the standard 16-byte sense byte.</p> <p>Mode 556 = OFF (default):</p> <p>An error code is set in the 8 - 11th bytes in the standard 16-byte sense byte.</p>	OFF	MCU/RCU
561	ShadowImage, Universal Volume Manager	<p>Allows Quick Restore for external volumes with different Cache Mode settings.</p> <p>Mode 561 = ON:</p> <p>Quick Restore for external volumes with different Cache Mode settings is prevented.</p> <p>Mode 561 = OFF (default):</p> <p>Quick Restore for external volumes with different Cache Mode settings is allowed.</p>	OFF	MCU/RCU
573	TrueCopy for Mainframe ShadowImage for Mainframe	<p>For the DKU emulation type 2105/2107, specifying the CASCADE option for the ICKDSF ESTPAIR command is allowed.</p> <p>Mode 573 = ON:</p> <p>The ESTPAIR CASCADE option is allowed.</p> <p>Mode 573 = OFF (default):</p> <p>The ESTPAIR CASCADE option is not allowed. (When specified, the option is rejected.)</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. When DKC emulation type is 2105/2107, this mode is applied in the case where pair creation in TCz – SIz cascading configuration in the ICKDSF environment fails with the following message output. Message: ICK30111I DEVICE SPECIFIED IS THE SECONDARY OF A DUPLEX OR PPRC PAIR 2. The CASCADE option can be specified in the TSO environment also. 3. Although the CASCADE option can be specified for the ESTPAIR command, the PPRC-XD function is not supported. 4. Perform thorough pre-check for any influence on GDPS/PPRC. 5. The SOM must be enabled only when the CASCADE option is specified for the ESTPAIR command for the DKC emulation type 2105/2107. 	OFF	MCU/RCU The unit where TCz and SIz in a cascading configuration use the same volume

Mode	Category	Description	Default	MCU/RCU
589	Universal Volume Manager	<p>Turning this option ON changes the frequency of progress updates when disconnecting an external volume. of disconnection is changed.</p> <p>improvement in destaging to the pool by achieving efficient HDD access.</p> <p>Mode 589 = ON:</p> <p>For each external volume, progress is updated only when the progress rate is 100%</p> <p>Mode 589 = OFF (default):</p> <p>Progress is updated when the progress rate exceeds the previous level.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. Set this option to ON when disconnecting an external volume while the specific host IO operation is online and its performance requirement is severe. 2. Whether the disconnecting status for each external volume is progressed or not cannot be confirmed on Device Manager - Storage Navigator (It indicates "- "until just before the completion and at the last it changes to 100%). 	OFF	
598	Universal Replicator for Mainframe	<p>This mode is used to report SIMs (RC=DCE0 to DCE3) to a Mainframe host to warn that a URz journal is full.</p> <p>Mode 598 = ON:</p> <p>SIMs (RC=DCE0 to DEC3) to warn that a JNL is full are reported to SVP and the host.</p> <p>Mode 598= OFF (default):</p> <p>SIMs (RC=DCE0 to DEC3) to warn that a JNL is full are reported to SVP only.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is applied if SIMs (RC=DCE0 to DCE3) need to be reported to a Mainframe host. 2. The SIMs are not reported to the Open server. 3. SIMs for JNL full (RC=DCE0 and DCE1) on MCU are reported to the host connected with MCU. 4. SIMs for JNL full (RC=DCE2 and DCE3) on RCU are reported to the host connected with RCU. 	ON	
689	TrueCopy for Mainframe ShadowImage for Mainframe	<p>This option is used to slow down the initial copy and resync copy operations when the Write Pending rate on RCU exceeds 60%.</p> <p>Mode 689 = ON:</p> <p>The initial copy and resync copy operations are slowed down when the Write Pending rate on RCU exceeds 60%.</p> <p>* From RAID700, if the CLPR write pending rate where the initial copy target secondary volume belongs to is not over</p>	OFF	

Mode	Category	Description	Default	MCU/RCU
		<p>60% but that of MP PCB where the S-VOL belongs to is over 60%, the initial copy operation is slowed down.</p> <p>Mode 689 = OFF (default):</p> <p>The initial copy and resync copy operations are not slowed down when the Write Pending rate on RCU exceeds 60% (the same as before).</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode can be set online. 2. The micro-programs on both MCU and RCU must support this mode. 3. This mode should be set per customer's requests. 4. If the Write Pending status long keeps 60% or more on RCU, it takes extra time for the initial copy and resync copy to be completed by making up for the slowed down copy operation. 5. From RAID700, if the Write Pending rate of CLPR where the initial copy target secondary volume belongs to is not over 60% but that of MP PCB where the S-VOL belongs to is over 60%, the initial copy operation is slowed down. 		
690	Universal Replicator, Universal Replicator for Mainframe	<p>This option is used to prevent Read JNL or JNL Restore when the Write Pending rate on RCU exceeds 60% as follows:</p> <ul style="list-style-type: none"> • When CLPR of JNL-Volume exceeds 60%, Read JNL is prevented. • When CLPR of Data (secondary)-Volume exceeds 60%, JNL Restore is prevented. <p>Mode 690 = ON:</p> <p>Read JNL or JNL Restore is prevented when the Write Pending rate on RCU exceeds 60%.</p> <p>Mode 690 = OFF (default):</p> <p>Read JNL or JNL Restore is not prevented when the Write Pending rate on RCU exceeds 60% (the same as before).</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode can be set online. 2. This mode should be set per customer's requests. 3. If the Write Pending status long keeps 60% or more on RCU, it takes extra time for the initial copy to be completed by making up for the prevented copy operation. 4. If the Write Pending status long keeps 60% or more on RCU, the pair status may become Suspend due to the JNL-Vol being full. 	OFF	
696	Open	<p>This mode is available to enable or disable the QoS function.</p> <p>Mode 696 = ON:</p>	OFF	

Mode	Category	Description	Default	MCU/RCU
		<p>QoS is enabled. (In accordance with the Share value set to SM, I/Os are scheduled. The Share value setting from RMLIB is accepted)</p> <p>Mode 696 = OFF (default):</p> <p>QoS is disabled. (The Share value set to SM is cleared. I/O scheduling is stopped. The Share value setting from host is rejected)</p> <p>Note:</p> <p>Set this mode to ON when you want to enable the QoS function.</p>		
701	Universal Volume Manager	<p>Issues the Read command at the logical unit discovery operation using UVM.</p> <p>Mode 701 = ON:</p> <p>The Read command is issued at the logical unit discovery operation.</p> <p>Mode 701 = OFF:</p> <p>The Read command is not issued at the logical unit discovery operation.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. When the Open LDEV Guard attribute (VMA) is defined on an external device, set the system option to ON. 2. When this option is set to ON, it takes longer time to complete the logical unit discovery. The amount of time depends on external storages. 3. With this system option OFF, if searching for external devices with VMA set, the VMA information cannot be read. 4. When the mode is set to ON while the following conditions are met, the external volume is blocked. <ol style="list-style-type: none"> a. RAID700 70-03-3x-00/00 or higher version is used on the storage system. b. An external volume to which Nondisruptive Migration (NDM) attribute is set exists. c. The external volume is reserved by the host 5. As the VMA information is USP/NSC specific, this mode does not need to be ON when the external storage is other than USP/NSC. 6. Set the mode to OFF when the following conditions are met. <ol style="list-style-type: none"> a. RAID700 70-03-3x-00/00 or higher version is used on the storage system b. An external volume to which Nondisruptive Migration (NDM) attribute is set exists. 	OFF	
704	Open and Mainframe	<p>To reduce the chance of MIH, this option can reduce the priority of SI, VM, CoW Snapshot, Flash Copy or Resync copy internal IO requests so that host IO has a higher priority. This mode creates new work queues where these jobs can be assigned with a lower priority.</p>	OFF	

Mode	Category	Description	Default	MCU/RCU
		<p>Mode 704 = ON:</p> <p>Copy processing requested is registered into a newly created queue so that the processing is scheduled with lower priority than host I/O.</p> <p>Mode 704 = OFF: (Default)</p> <p>Copy processing requested is not registered into a newly created queue. Only the existing queue is used.</p> <p>Note:</p> <p>If the PDEV is highly loaded, the priority of Read/Write processing made by SI, VM, Snapshot, Compatible FlashCopy® V2 or Resync may become lower. As a consequence the copy speed may be slower.</p>		
721	Open and Mainframe	<p>When a parity group is uninsulated or installed, the following operation is performed according to the setting of mode 721.</p> <p>Mode 721 = ON:</p> <p>When a parity group is uninstalled or installed, the LED of the drive for uninstallation is not illuminated, and the instruction message for removing the drive does not appear. Also, the windows other than that of parity group, such as DKA or DKU, are unavailable to select.</p> <p>Mode 721 = OFF (default):</p> <p>When a parity group is uninstalled or installed, the operation is as before: the LED of the drive is illuminated, and the drive must be unmounted and remounted.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. When the RAID level or emulation type is changed for the existing parity group, this option should be applied only if the drive mounted position remains the same at the time of the parity group uninstallation or installation. 2. After the operation using this option is completed, the mode must be set back to OFF; otherwise, the LED of the drive to be removed will not be illuminated at subsequent parity group uninstalling operations. 	OFF	
725	Universal Volume Manager	<p>This option determines the action that will be taken when the status of an external volume is Not Ready</p> <p>Mode 725 = ON:</p> <p>When Not Ready is returned, the external path is blocked and the path status can be automatically recovered (Not Ready blockade). Note that the two behaviors, automatic recovery and block, may be repeated.</p> <p>For version 60-05-06-00/00 and later, when the status of a device is Not Ready blockade, Device Health Check is executed after 30 seconds.</p>	OFF	

Mode	Category	Description	Default	MCU/RCU
		<p>Mode 725 = OFF (default):</p> <p>When Not Ready is returned three times in three minutes, the path is blocked and the path status cannot be automatically recovered (Response error blockade).</p> <p>Notes:</p> <ol style="list-style-type: none"> For R700 70-01-62-00/00 and lower (within 70-01-xx range) <ul style="list-style-type: none"> Applying this SOM is prohibited when USP V/VM is used as an external subsystem and its external volume is DP-VOL. Applying this SOM is recommended when the above condition (1) is not met and SUN storage is used as an external storage. Applying this SOM is recommended if the above condition (1) is not met and a maintenance operation such as firmware update causing controller reboot is executed on the external storage side while a storage system other than Hitachi product is used as an external subsystem. For R700 70-02-xx-00/00 and higher <ul style="list-style-type: none"> Applying this SOM is prohibited when USP V/VM is used as an external subsystem and its external volume is DP-VOL. Applying this SOM is recommended when the above condition (1) is not met and SUN storage is used as an external storage. Applying this SOM is recommended when the above condition (1) is not met and EMC CX series or Fujitsu Fibre CAT CX series is used as an external storage. Applying this SOM is recommended if the above condition (1) is not met and a maintenance operation such as firmware update causing controller reboot is executed on the external storage side while a storage system other than Hitachi product is used as an external subsystem. (Continued below) While USP V/VM is used as an external subsystem and its volume is DP-VOL, if SOM e Pool-VOLs constituting the DP-VOL are blocked, external path blockade and recovery occurs repeatedly. When a virtual volume mapped by UVM is set to pool-VOL and used as DP-VOL in local subsystem, this SOM can be applied without problem. 		
729	Dynamic Provisioning Data Retention Utility	<p>To set the Protect attribute for the target DP-VOL using Data Retention Utility (DRU), when any write operation is requested to the area where the page allocation is not provided at a time when the HDP Pool is full.</p> <p>Mode 729 = ON:</p> <p>To set the Protect attribute for the target DP-VOL using DRU, when any write operation is requested to the area where the page allocation is not provided at a time when the HDP pool is full. (Not to set in the case of Read request.)</p>	OFF	

Mode	Category	Description	Default	MCU/RCU
		<p>Mode 729 = OFF (default):</p> <p>Not to set the Protect attribute for the target DP-VOL using DRU, when any write operation is requested to the area where the page allocation is not provided at a time when HDP pool is full.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This SOM is applied when: <ul style="list-style-type: none"> • The threshold of pool is high (for example. 95%) and the pool may be full. • File system is used. • Data Retention Utility is installed. 2. Since the Protect attribute is set for V-VOL, the Read operation cannot be allowed as well. 3. When Data Retention Utility is not installed, the desired effect is not achieved. 4. Protect attribute can be released from the Data Retention window of Device Manager - Storage Navigator after releasing the full status of the pool by adding a Pool-VOL. 5. With RAID800 V02 and later versions, do not change the mode setting when the pool is full. Instead, use the virtual volume protection function to change the setting. 6. With R800 V02+2 and later, when HMO63 or 73 is set to ON, the setting of the HMO takes precedence over the setting of SOM 729. SOM 729 acts as if it were turned OFF, even if it is actually turned ON. 		
733	Volume Migration V2, ShadowImage, ShadowImage for Mainframe	<p>This option enables to suspend Volume Migration or Quick Restore operation during LDEV-related maintenance.</p> <p>Mode 733 = ON:</p> <p>Volume Migration V2 or Quick Restore operation during LDEV-related maintenance is not suspended</p> <p>Mode 733 = OFF (default):</p> <p>Volume Migration V2 or Quick Restore operation during LDEV-related maintenance is suspended</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This option should be applied when Volume Migration V2 or Quick Restore operation can be suspended during LDEV-related maintenance. 2. Set mode 733 to ON if you want to perform any LDEV-related maintenance activities and you do not want these operations to fail when Volume Migration or Quick Restore is active. 3. This option is recommended as functional improvement to avoid maintenance failures. In some cases of a failure in LDEV-related maintenance without setting the option, Storage Navigator operations may be unavailable. 4. There is the potential for LDEV-related maintenance activities to fail when Volume Migration V2 and Quick Restore is active without setting the option. 	OFF	

Mode	Category	Description	Default	MCU/RCU
734	Microcode version V02 and lower: Dynamic Provisioning Microcode version V02 +1 and higher: Dynamic Provisioning Dynamic Provisioning for Mainframe	<p>When exceeding the pool threshold, the SIM is reported as follows:</p> <p>Mode 734 = ON:</p> <p>The SIM is reported at the time when exceeding the pool threshold. If the pool usage rate continues to exceed the pool threshold, the SIM is repeatedly reported every eight (8) hours. Once the pool usage rate falls below the pool threshold, and then exceeds again, the SIM is reported.</p> <p>Mode 734 = OFF (default):</p> <p>The SIM is reported at the time when exceeding the pool threshold. The SIM is not reported while the pool usage rate continues to exceed the pool threshold. Once the pool usage rate falls below the pool threshold and then exceeds again, the SIM is reported.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This option is turned ON to prevent the write I/O operation from being unavailable due to pool full. 2. If the exceeding pool threshold SIM occurs frequently, other SIMs may not be reported. 3. Though turning on this option can increase the warning effect, if measures such as adding a pool fail to be done in time so that the pool becomes full, MODE 729 can be used to prevent file systems from being destroyed. 4. Turning on MODE 741 can provide the SIM report to not only the users but also the service personnel. 	OFF	
741	Microcode version V02 and lower: Dynamic Provisioning Microcode version V02 +1 and higher: Dynamic Provisioning, Dynamic Provisioning for Mainframe	<p>The option enables to switch over whether to report the following SIM for users to the service personnel:</p> <p>SIM-RC 625000 (HDP pool usage rate continues to exceed the threshold)</p> <p>Mode 741 = ON:</p> <p>SIM is reported to the service personnel</p> <p>Mode 741 = OFF (default):</p> <p>SIM is not reported to the service personnel</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This option is set to ON to have SIM for users reported to the service personnel: <ul style="list-style-type: none"> • For the system where SNMP and E-mail notification are not set. • If Device Manager - Storage Navigator is not periodically activated. 2. When MODE 734 is turned OFF, SIM-RC625000 is not reported; accordingly the SIM is not reported to the service personnel even though this option is ON. 	OFF	-
745	Universal Volume Manager	<p>Enables to change the area where the information is obtained as the Characteristic1 item from SYMMETRIX.</p> <p>Mode 745 = ON:</p>	OFF	-

Mode	Category	Description	Default	MCU/RCU
		<ul style="list-style-type: none"> The area where the information is obtained as the Characteristic1 item from SYMMETRIX is changed. When CheckPaths or Device Health Check (1/hour) is performed, the information of an already-mapped external volume is updated to the one after change. <p>Mode 745 = OFF (default):</p> <ul style="list-style-type: none"> The area where the information is obtained as the Characteristic1 item from SYMMETRIX is set to the default. When CheckPaths or Device Health Check (1/hour) is performed, the information of an already-mapped external volume is updated to the default. <p>Notes:</p> <ol style="list-style-type: none"> This option is applied when the Characteristic1 item is displayed in symbols while the EMC SYMMETRIX is connected using UVM. Enable the setting of EMC SCSI Flag SC3 for the port of the SYMMETRIX connected with Virtual Storage Platform. If the setting of EMC SCSI Flag SC3 is not enabled, the effect of this mode may not be achieved. If you want to enable this mode immediately after setting, perform Check Paths on each path one by one for all the external ports connected to the SYMMETRIX. Without doing Check Paths, the display of Characteristic1 can be changed automatically by the Device Health Check performed once per hour. If SSB=AD02 occurs and a path is blocked, perform Check Paths on this path again. If Check Paths is performed while ShadowImage for Mainframe pair and Compatible FlashCopy® V2 Mirror pair are defined in the specified volume, the Check Paths operation is rejected with a message "605 2518". If ShadowImage for Mainframe pair and Compatible FlashCopy® V2 Mirror pair are defined in the specified volume, do not perform Check Paths and wait until the display is automatically changed. 		
749	Microcode version V02 and lower: Dynamic Provisioning, Dynamic Tiering Microcode version V02_ICS or V02+1: Dynamic Provisioning Dynamic Provisioning for Mainframe Dynamic Tiering	Disables the Dynamic Provisioning Rebalance function that allows the HDDs of all ECC Groups in the pool to share the load. <p>Mode 749 = ON:</p> The Dynamic Provisioning Rebalance function is disabled. <p>Mode 749 = OFF (default):</p> The Dynamic Provisioning Rebalance function is activated. <p>Notes:</p> <ol style="list-style-type: none"> This option is applied when no change in performance characteristic is desired. All HDP pools are subject to the HDP Rebalance function. When a pool is newly installed, the load may be concentrated on the installed pool volumes. 	OFF	

Mode	Category	Description	Default	MCU/RCU
	Microcode version V03 and higher: Dynamic Provisioning Dynamic Provisioning for Mainframe Dynamic Tiering Dynamic Tiering for Mainframe	4. When 0 data discarding is executed, load may be unbalanced among pool volumes.		
757	Open and Mainframe	<p>Enables/disables output of in-band audit logs.</p> <p>Mode 757 = ON:</p> <p>Output is disabled.</p> <p>Mode 776 = OFF (default):</p> <p>Output is enabled.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. Mode 757 applies to the sites where outputting the In-band audit logs is not needed. 2. When this option is set to ON <ul style="list-style-type: none"> - There is no access to SM for the In-band audit logs, which can avoid the corresponding performance degradation. - SM is not used for the In-band audit logs. 3. If outputting the In-band audit log is desired, set this mode to OFF. 	OFF	MCU/RCU
762	Universal Replicator for Mainframe	<p>This mode enables to settle the data to RCU according to the time stamp specified in the command when a Flush suspension for an EXCTG is performed from BCM.</p> <p>Mode 762 = ON:</p> <p>The data is settled to RCU according to the time stamp specified in the command.</p> <p>Mode 762 = OFF (default):</p> <p>The data is settled to RCU according to the time stamp that RCU has received.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is applied under the following conditions. <ul style="list-style-type: none"> • Universal Replicator for Mainframe. • EXCTG configuration. • Flush suspension with an EXCTG specified is executed. • BCM is installed on the host where the time stamping function is available. • (In the case of multiple-host configuration, SYSPLEX timer is available on the system) 	OFF	RCU (On RCU side, consideration in Takeover is required for setting)

Mode	Category	Description	Default	MCU/RCU
		<p>2. If this mode is set to ON while the BCM does not exist in the environment where the time stamping function is available (In the case of multiple-host configuration, SYSPLEX timer is available on the system), the pair status may not become Suspend after Flush suspension for an EXCTG.</p> <p>3. Do not set this mode to ON if the BCM does not exist in the environment where the time stamping function is available (In the case of multiple-host configuration, SYSPLEX timer is available on the system).</p>		
769	TrueCopy TrueCopy for Mainframe Universal Replicator Universal Replicator for Mainframe	<p>This mode controls whether the retry operation is executed or not when a path creation operation is executed.</p> <p>(The function applies to both of CU FREE path and CU single path for Open and Mainframe).</p> <p>Mode 769 = ON:</p> <p>The retry operation is disabled when the path creation operation is executed (retry operation is not executed).</p> <p>Mode 769 = OFF (default):</p> <p>The retry operation is enabled when the path creation operation is executed (retry operation is executed).</p> <p>Notes:</p> <p>1. This mode is applied when the three conditions below are met:</p> <ul style="list-style-type: none"> SOM 114 is set to OFF (operation of automatically switching the port is disabled). HMO 49 and HMO 50 are set to OFF (70-02-31-00/00 and higher). TPC-R is used (it is not applied in normal operation). <p>2. When SOM 769 is set to ON, SOM 114, HMO 49 and HMO 50 must not be set to ON.</p> <p>3. In either of the following cases, the path creating operation may fail after automatic port switching is executed.</p> <ul style="list-style-type: none"> SOM 114 is set to ON. HMO 49 and HMO 50 are set to ON. 	OFF	MCU and RCU
776	TrueCopy for Mainframe, Business Continuity Manager	<p>This mode enables/disables to output the F/M=FB message to the host when the status of P-VOL changes to Suspend during a TC/TCA S-VOL pair suspend or deletion operation from BCM.</p> <p>Mode 776 = ON:</p> <p>When the status of P-VOL changes to Suspend during a TC/TCA S-VOL pair suspend or deletion operation from BCM, the F/M=FB message is not output to the host.</p> <p>Mode 776 = OFF (default):</p> <p>When the status of P-VOL changes to Suspend during a TC/TCA S-VOL pair suspend or deletion operation from BCM, the F/M=FB message is output to the host.</p>	OFF	

Mode	Category	Description	Default	MCU/RCU
		Notes: <ol style="list-style-type: none"> 1. Set this mode to ON in the environment where TC/TCA for z/OS is used from BCM and the MCU host does not need the F/M=FB message output during an S-VOL pair suspend or deletion operation from BCM. 2. If this mode is set to ON, the F/M=FB message is not output to the host when the status of P-VOL changes to Suspend during a TC/TCA S-VOL pair suspend or deletion operation from BCM 3. If the PPRC item of CU option is set to NO, the F/M=FB message is not output to the host regardless of setting of this mode. 4. If the function switch#07 is set to "enable", the F/M=FB message is not output to the host regardless of setting of this mode. 		
784	TrueCopy global-active device'	<p>This mode can reduce the MIH watch time of RI/O for a TrueCopy for Mainframe or global-active device pair internally so that update I/Os can continue by using an alternate path without MIH or time-out occurrence in the environment where Mainframe host MIH is set to 15 seconds, or Open host time-out time is short (15 seconds or less). The mode is effective at initial pair creation or Resync operation for Hitachi TrueCopy® for Mainframe or global-active device. It is not effective by just setting this mode to ON.</p> <p>Mode 784 = OFF (default):</p> <p>The operation is processed in accordance with the TC Sync for z/OS, TC Sync. or global-active device specification.</p> <p>Mode 784 = ON</p> <p>This mode reduces the internal MIH time of RI/Os so that when a path failure occurs between controllers on which the host MIH time is set to 15 seconds, update I/Os can be quickly processed by using an alternate path. This lowers the possibility of host MIH occurrence.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is used when the MIH time on a mainframe host is set to 15 seconds, or the timeout time on an open system host is set to 15 seconds or less. 2. The purpose of this mode is to reduce the RI/O MIH tome to 5 seconds. 3. This function is available for all the TC Sync for mainframe, TC Sync, and GAD pairs on the subsystem, unable to specify the pairs that are using this function or not. 4. To apply the mode to TC Sync, the firmware must be the supported version on both sides. 5. For a TC Sync or TC Sync pair with the mode effective (RI/O MIH time is 5 seconds), the setting of RI/O MIH time made at RCU registration (default is 15 seconds, which can be changed within range from 10 to 100 seconds) is invalid. However, RI/O MIH time displayed on Device Manager - Storage 	OFF	MCU/RCU

Mode	Category	Description	Default	MCU/RCU
		<p>Navigator and CCI is not "5 seconds" but is what set at RI/O registration.</p> <ol style="list-style-type: none"> 6. For a TC Sync for z/OS TC Sync, or GAD pair with the mode effective (RI/O MIH time is 5 seconds), the setting of RI/O MIH time made at RCU registration (default is 15 seconds, which can be changed within range from 10 to 100 seconds) is invalid. However, RI/O MIH time displayed on Storage Navigator and CCI is not "5 seconds" but is what set at RI/O registration 7. If a failure occurs on the switched path between controllers, mainframe host MIH or open server time-out may occur. 8. If a VSD to which the path between controllers belongs is overloaded, switching to an alternate path delays and host MIH or time-out may occur. 9. If an RI/O retry occurs due to other factors than RI/O MIH (5 sec), such as a check condition report issued from RCU to MCU, the RI/O retry is performed on the same path instead of an alternate path. If a response delay to the RI/O occurs constantly on this path due to path failure or link delay, host MIH or time-out may occur due to response time accumulation for each RI/O retried within 5 seconds. 10. Even though the mode is set to ON, if Mainframe host MIH time or Open host time-out time is set to 10 seconds or less, host MIH or time-out may occur due to a path failure between controllers. 11. Operation commands are not available for quickly switching to an alternate path. 12. The mode works for the pair on which an initial pair creation or Resync operation is executed. 13. Micro-program downgrade to an unsupported version cannot be executed unless all the TC Sync for z/OS or TC Sync pairs are suspended or deleted. 14. For GAD pairs, the mode is effective if the firmware is in a version that supports GAD. 		
787	Compatible FlashCopy(R) V2	<p>This mode enables the batch prefetch copy.</p> <p>Mode 787 = ON:</p> <p>The batch prefetch copy is executed for an FCv2 pair and a Preserve Mirror pair</p> <p>Mode 787 = OFF (default):</p> <p>The batch prefetch copy is not executed.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. When the mode is set to ON, the performance characteristic regarding sequential I/Os to the FCv2target VOL changes. 2. The mode is applied only when SOM 577 is set to OFF 3. The mode is applied if response performance for a host I/O issued to the FCv2 target VOL is prioritized 	OFF	

Mode	Category	Description	Default	MCU/RCU
803	Dynamic Provisioning, Data Retention Utility	<p>While a HDP pool VOL is blocked, if a read or write I/O is issued to the blocked pool VOL, this mode can enable the Protect attribute of DRU for the target DP-VOL.</p> <p>Mode 803 = ON:</p> <p>While a HDP pool VOL is blocked, if a read or write I/O is issued to the blocked pool VOL, the DRU attribute is set to Protect.</p> <p>Mode 803 = OFF (default):</p> <p>While a HDP pool VOL is blocked, if a read or write I/O is issued to the blocked pool VOL, the DRU attribute is not set to Protect.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is applied when <ul style="list-style-type: none"> • a file system using HDP pool VOLs is used. • Data Retention Utility is installed. 2. Because the DRU attribute is set to Protect for the V-VOL, a read I/O is also disabled. 3. If Data Retention Utility is not installed, the expected effect cannot be achieved. 4. The Protect attribute of DRU for the HDP V-VOL can be released on the Data Retention window of Device Manager - Storage Navigator after recovering the blocked pool VOL. 	OFF	
855	ShadowImage, ShadowImage for Mainframe, Volume Migration V2	<p>By switching the mode to ON/OFF when ShadowImage is used with SOM 467 set to ON, copy processing is continued or stopped as follows.</p> <p>Mode 855 = ON:</p> <p>When the amount of dirty data is within the range from 58% to 63%, the next copy processing is continued after the dirty data created in the previous copy is cleared to prevent the amount of dirty data from increasing (copy after destaging). If the amount of dirty data exceeds 63%, the copy processing is stopped.</p> <p>Mode 855 = OFF (default):</p> <p>The copy processing is stopped when the amount of dirty data is over 60%.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is applied when all the following conditions are met <ul style="list-style-type: none"> • ShadowImage is used with SOM 467 set to ON. • Write pending rate of an MP blade that has LDEV ownership of the copy target is high • Usage rate of a parity group to which the copy target LDEV belongs is low. • ShadowImage copy progress is delayed. 2. This mode is available only when SOM 467 is set to ON. 		

Mode	Category	Description	Default	MCU/RCU
		<p>3. If the workload of the copy target parity group is high, the copy processing may not be improved even if this mode is set to ON</p>		
857	Open and Mainframe	<p>This mode enables or disables to limit the cache allocation capacity per MPB to within 128 GB except for cache residency.</p> <p>Mode 857 = ON:</p> <p>The cache allocation capacity is limited to within 128 GB.</p> <p>Mode 857 = OFF (default):</p> <p>The cache allocation capacity is not limited to within 128 GB.</p> <p>Note:</p> <p>This mode is used with VSP microcode version -04 (70-04-0x-00/00) and earlier. It is also applied when downgrading the microprogram from V02 (70-02-02-00/00) or higher to a version earlier than V02 (70-02-02-00/00) while over 128 GB is allocated.</p>	OFF	-
867	Dynamic Provisioning	<p>All-page reclamation (discarding all mapping information between HDP pool and HDP volumes) is executed in DP-VOL LDEV format. This new method is enabled or disabled by setting the mode to ON or OFF.</p> <p>Mode 867 = ON:</p> <p>LDEV format of the DP-VOL is performed with page reclamation.</p> <p>Mode 867 = OFF (default):</p> <p>LDEV format of the HDP-VOL is performed with 0 data writing.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is applied at recovery after a pool failure. 2. Do not change the setting of the mode during DP-VOL format. 3. If the setting of the mode is changed during DP-VOL format, the change is not reflected to the format of the DP-VOL being executed but the format continues in the same method. 	OFF	
872	Universal Volume Manager	<p>When the mode is applied, the order of data transfer slots is guaranteed at the destaging from P9500 to an external storage.</p> <p>Mode 872 = ON:</p> <p>The order of data transfer slots from VSP to an external storage is guaranteed.</p> <p>Mode 872 = OFF (default):</p> <p>The order of data transfer slots from VSP to an external storage is not guaranteed.</p>	OFF	

Mode	Category	Description	Default	MCU/RCU
		<p>In V03 and later versions, the mode is set to ON before shipment.</p> <p>If the micro-program is exchanged to a supported version (V03 or later), the setting is OFF as default and needs to be set to ON manually.</p> <p>Note:</p> <p>This mode is applied when performance improvement at sequential write in UVM configuration is required.</p>		
895	TrueCopy for Mainframe	<p>Setting the mode to ON or OFF, the link type with transfer speed of 8 GBps or 4 GBps is reported respectively.</p> <p>Mode 895 = ON:</p> <p>When the FICON/FC link up speed is 8 GBps, the link type with transfer speed of 8 GBps is reported.</p> <p>Mode 895 = OFF (default):</p> <p>The link type with transfer speed of up to 4 GBps is reported , even when the actual transfer speed is 8 GBps.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. To apply the mode, set the RMF version of mainframe to be connected to 1.12 or higher. 2. If the OS does not use a supported version, the transfer speed cannot be displayed correctly. 	OFF	
896	Dynamic Provisioning Dynamic Provisioning for Mainframe, Dynamic Tiering Dynamic Tiering for Mainframe, Hitachi Thin Image	<p>The mode enables or disables the background format function performed on an unformatted area of a HDP/HDT pool.</p> <p>For information regarding operating conditions, refer to Hitachi Virtual Storage Platform G1000 Provisioning Guide for Open Systems or Hitachi Virtual Storage Platform G1000 Provisioning Guide for Mainframe Systems.</p> <p>Mode 896 = ON (default)</p> <p>The background format function is enabled.</p> <p>Mode 896 = OFF</p> <p>The background format function is disabled.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. The mode is applied when a customer requires the background format for a HDP/HDT pool in the environment where new page allocation (for example, when system files are created from a host for newly created multiple HDP VOLS), frequently occurs and the write performance degrades because of an increase in write pending rate. 2. When the mode is set to ON, because up to 42MB/s of ECCG performance is used, local copy performance may degrade by about 10%. Therefore, confirm whether the 10% performance degradation is acceptable or not before setting the mode to ON. 	ON	

Mode	Category	Description	Default	MCU/RCU
		<p>3. When a Dynamic Provisioning VOL that is used as an external VOL is used as a pool VOL, if the external pool becomes full due to the background format, the external VOL may be blocked.</p> <p>If the external pool capacity is smaller than the external VOL (Dynamic Provisioning VOL), do not set the mode to ON.</p>		
897	Dynamic Tiering, Dynamic Tiering for Mainframe	<p>By the combination of SOM 897 and 898 setting, the expansion width of Tier Range upper I/O value (IOPH) can be changed as follows.</p> <p>Mode 897 = ON:</p> <ul style="list-style-type: none"> SOM 898 is OFF: 110%+0IO SOM 898 is ON: 110%+2IO <p>Mode 897 = OFF (Default)</p> <ul style="list-style-type: none"> SOM 898 is OFF: 110%+5IO (Default) SOM 898 is ON: 110%+1IO <p>By setting the SOM s to ON to lower the upper limit for each tier, the gray zone between other tiers becomes narrow and the frequency of page allocation increases.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. Apply the mode when the usage of upper tier is low and that of lower tier is high. 2. The mode must be used with SOM 898. 3. Narrowing the gray zone increases the number of pages to migrate between tiers per relocation. 4. When Tier1 is SSD while SOM 901 is set to ON, the effect of SOM 897 and 898 to the gray zone of Tire1 and Tier2 is disabled and the SOM 901 setting is enabled instead. In addition, the settings of SOM 897 and 898 are effective for Tire2 and Tier3. <p>Please also see spreadsheet "SOM 897_898_901" for more details about the relations between SOM 897, 898 and 901.</p>	OFF	
898	Dynamic Tiering, Dynamic Tiering for Mainframe	<p>I/O value (IOPH) can be changed as follows.</p> <p>Mode 898 = ON:</p> <ul style="list-style-type: none"> SOM 897 is OFF: 110%+1IO SOM 897 is ON: 110%+2IO <p>Mode 898 = OFF (default):</p> <ul style="list-style-type: none"> SOM 897 is OFF: 110%+5IO (Default) SOM 897 is ON: 110%+0IO <p>By setting the SOM s to ON to lower the upper limit for each tier, the gray zone between other tiers becomes narrow and the frequency of page allocation increases.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. Apply the mode when the usage of upper tier is low and that of lower tier is high. 2. The mode must be used with SOM 897. 3. Narrowing the gray zone increases the number of pages to migrate between tiers per relocation. 	OFF	

Mode	Category	Description	Default	MCU/RCU
		<p>4. When Tier1 is SSD while SOM 901 is set to ON, the effect of SOM 897 and 898 to the gray zone of Tire1 and Tier2 is disabled and the SOM 901 setting is enabled instead. In addition, the settings of SOM 897 and 898 are effective for Tire2 and Tier3.</p> <p>Please also see spreadsheet "SOM 897_898_901" for more details about the relations between SOM 897, 898 and 901.</p>		
899	Volume Migration	<p>In combination with the SOM 900 setting, whether to execute and when to start the I/O synchronous copy change as follows.</p> <p>Mode 899 = ON:</p> <ul style="list-style-type: none"> SOM 900 is ON: I/O synchronous copy starts without retrying Volume Migration. SOM 900 is OFF: I/O synchronous copy starts when the threshold of Volume Migration retry is exceeded. (Recommended) <p>Mode 899 = OFF (default):</p> <ul style="list-style-type: none"> SOM 900 is ON: I/O synchronous copy starts when the number of retries reaches half of the threshold of Volume Migration retry. SOM 900 is OFF: Volume Migration is retired and I/O synchronous copy is not executed. <p>Notes:</p> <ol style="list-style-type: none"> This mode is applied when improvement of Volume Migration success rate is desired under the condition that there are many updates to a migration source volume of Volume Migration. During I/O synchronous copy, host I/O performance degrades. 	OFF	
900	Volume Migration	<p>In combination with SOM899 setting, whether to execute and when to start the I/O synchronous copy change as follows.</p> <p>Mode 900 = ON:</p> <ul style="list-style-type: none"> SOM899 is ON: I/O synchronous copy starts when the threshold of Volume Migration retry is exceeded. SOM899 is OFF: I/O synchronous copy starts when the number of retries reaches half of the threshold of Volume Migration retry. <p>Mode 900 = OFF (default):</p> <ul style="list-style-type: none"> SOM899 is ON: I/O synchronous copy starts when the threshold of Volume Migration retry is exceeded. (Recommended) SOM899 is OFF: Volume Migration is retired and I/O synchronous copy is not executed. <p>Notes:</p> <ol style="list-style-type: none"> This mode is applied when improvement of Volume Migration success rate is desired under the condition that there are many updates to a migration source volume of Volume Migration. 	OFF	

Mode	Category	Description	Default	MCU/RCU
		2. During I/O synchronous copy, host I/O performance degrades.		
901	Dynamic Tiering Dynamic Tiering for Mainframe	<p>By setting the mode to ON or OFF, the page allocation method of Tier Level ALL when the drive type of tier1 is SSD changes as follows.</p> <p>Mode 901 = ON:</p> <p>For tier1 (drive type is SSD), pages are allocated until the capacity reaches the limit. Without consideration of performance limitation exceedance, allocation is done from highly loaded pages until reaching the capacity limit</p> <p>When the capacity of the tier1 reaches the threshold value, the minimum value of the tier range is set to the starting value of the lower IOPH zone, and the maximum value of the lower tier range is set to the boundary value.</p> <p>Mode 901 = OFF (default):</p> <p>For tier1 (drive type is SSD), page allocation is performed based on performance potential limitation. With consideration of performance limitation exceedance, allocation is done from highly loaded pages but at the point when the performance limitation is reached, pages are not allocated any more even there is free space.</p> <p>When the capacity of the tier1 reaches the threshold value, the minimum value of the tier range is set to the boundary value, and the maximum value of the lower tier range is set to a value of boundary value x 110% + 5 [IOPH].</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is applied when pages with the maximum capacity need to be allocated to tier1 (drive type is SSD) with Dynamic Tiering or Dynamic Tiering for Mainframe. 2. When Tier1 is SSD while SOM901 is set to ON, the effect of SOM897 and 898 to the gray zone of Tire1 and Tier2 is disabled and the SOM901 setting is enabled instead. In addition, the settings of SOM897 and 898 are effective for Tire2 and Tier3. <p>Please also see spreadsheet "SOM897_898_901" for more details about the relations between SOM897, 898 and 901</p>	OFF	
904	Dynamic Tiering Dynamic Tiering for Mainframe	<p>By setting the mode to ON or OFF, the number of pages to be migrated per unit time at tier relocation is changed.</p> <p>Mode 904 = ON:</p> <p>The number of pages to be migrated at tier relocation is set to up to one page per second. Mode 904 = OFF (default):</p> <p>No restriction on the number of pages to be migrated at tier relocation (existing specification).</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This mode is applied when: 	OFF	

Mode	Category	Description	Default	MCU/RCU
		<ul style="list-style-type: none"> Dynamic Tiering for Mainframe is used (including multi platforms configuration). the requirement for response time is severe. <p>2. The number of pages to be migrated per unit time at tier relocation decreases.</p>		
908	Universal Replicator Universal Replicator for Mainframe	<p>The mode can change CM capacity allocated to MPBs with different workloads.</p> <p>Mode 908 = ON:</p> <p>The difference in CM allocation capacity among MPBs with different workload is large.</p> <p>Mode 908 = OFF (default):</p> <p>The difference in CM allocation capacity among MPBs with different workload is small (existing operation)</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. The mode is applied to a CLPR only used for UR JNLGs. 2. Since CM capacity allocated to MPBs with low load is small, the performance is affected by a sudden increase in load. 	OFF	
930	Dynamic Provisioning Hitachi Thin Image	<p>When the mode is set to ON, all of the zero data page reclamation operations in processing are stopped. (Also the zero data page reclamation cannot be started.)</p> <p>* Zero data page reclamation by WriteSame and UNMAP functions, and IO synchronous page reclamation are not disabled.</p> <p>Mode 930 = ON:</p> <p>All of the zero data page reclamation operations in processing are stopped at once. (Also the zero data reclamation cannot be newly started.)</p> <p>Mode 930 = OFF (default):</p> <p>The zero data page reclamation is performed.</p> <p>See sheet "SOM 930" for relationship with SOM 755 and SOM 859.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. The mode is applied when stopping or disabling zero data page reclamation by user request is required. 2. When the mode is set to ON, the zero data page reclamation does not work at all. <ul style="list-style-type: none"> Zero data page reclamation by Write Same and UNMAP, and IO synchronous page reclamation can work. 3. When downgrading micro-program to a version that does not support the mode while the mode is set to ON, set the mode to OFF after the downgrade <ul style="list-style-type: none"> Because the zero data page reclamation does not work at all while the mode is set to ON. 4. The mode is related to SOM 755 and SOM 859. 	OFF	

Mode	Category	Description	Default	MCU/RCU
937	Dynamic Provisioning Dynamic Provisioning for Mainframe Dynamic Tiering Dynamic Tiering for Mainframe	<p>By setting the mode to ON, HDT monitoring data is collected even if the pool is a HDP pool.</p> <p>Mode 937 = ON:</p> <p>HDT monitoring data is collected even if the pool is a HDP pool.</p> <p>Only Manual execution mode and Period mode are supported.</p> <p>Mode 937 = OFF (default):</p> <p>HDT monitoring data is not collected if the pool is a HDP pool</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. The mode is applied when HDT monitoring data collection is required in HDP environment. 2. When HDT is already used, do not set the mode to ON. 3. For HDT monitoring data collection, shared memory for HDT must be installed. 4. If monitoring data collection is performed without shared memory for HDT installed, an error is reported and the monitoring data collection fails. 5. Before removing the shared memory for HDT, set the mode to OFF and wait for 30 minutes. 6. Tier relocation with monitoring data collected when the mode is set to ON is disabled. 7. When HDP is converted into HDT (after purchase of PP license), the collected monitoring data is discarded. 	OFF	
1050	Universal Replicator TrueCopy global-active device	<p>This mode enables creation of pairs using user capacity in excess of 1.8 PB per system by managing differential BMP in hierarchical memory for pair volumes whose capacity is 4 TB (open) or 262,668 Cyl (mainframe) or less.</p> <p>Mode 1050 = ON:</p> <p>For pair volumes of 4 TB (open)/262,668 Cyl (mainframe) or less, differential BMP is managed in hierarchical memory that performs caching to CM/PM using HDD as a master and enables creation of pairs using user capacity in excess of 1.8 PB per system.</p> <p>Mode 1050= OFF (default):</p> <p>For pair volumes of 4TB (OPEN)/262,668 Cyl (Mainframe) or less, differential BMP is managed in SM as usual so that the user capacity to create pairs is limited to 1.8 PB per system. Also, differential MPB management can be switched from the hierarchical memory to SM by performing a resync operation for pairs whose volume capacity is 4 TB (open)/ 262,668 Cyl (mainframe) or less.</p> <p>Notes.</p> <ol style="list-style-type: none"> 1. This mode is related to SOM 1058. 	OFF	Both

Mode	Category	Description	Default	MCU/RCU
		<ol style="list-style-type: none"> 2. The hierarchical memory is used for volumes over 4 TB (open)/262,668 Cyl (mainframe) even when the mode is set to OFF. 3. When the mode is turned OFF after operating with the mode set to ON, if resynchronizing pairs whose volume capacity is 4TB (open)/262,668Cyl (Mainframe) or less managed in the hierarchical memory, the pair resync operation may fail due to lack of the SM capacity. 4. If a pair resync operation fails, the pairs exceeding 1.8 PB of user capacity need to be deleted. 5. Open non-DP VOLs do not support hierarchical memory differential management so that the mode cannot be applied. 6. To downgrade the microcode, the procedure described in Maintenance Manual (Function ID 01:03 described in 03 MICRO-FC) is required. Refer to the manual before applying the mode. 7. The mode is applied when pair creation using user capacity exceeding 1.8 PG per system is desired. 8. Depending on the I/O pattern, I/O response might be affected. 9. Depending on the condition, initial copy time might be affected 10. The differential BMP managed in hierarchical memory does not use the shared memory, but the differential data is managed in a pool with which the volumes are associated. For the pool capacity necessary for the differential data management, refer to "Differential Data" in the Hitachi TrueCopy® User Guide, Hitachi TrueCopy® for Mainframe User Guide, Hitachi Universal Replicator User Guide, Hitachi Universal Replicator for Mainframe User Guide, and the Global-Active Device User Guide. 11. Before using this SOM to increase pair volumes on the storage system, check the resources on the storage system to make sure all performance requirements are met. 		
1058	Universal Replicator TrueCopy global-active device	<p>This mode can change differential BMP management from SM to hierarchical memory so that the number of pairs to be created on a system and user capacity used for pairs increase.</p> <ul style="list-style-type: none"> • For mainframe systems, all pairs can be managed in hierarchical memory so that pairs can be created by all LDEVs. • For open systems, pairs that can only be managed in SM use SM so that the number of pairs that can be created using non-DP VOLs increases. <p>Mode 1058 = ON:</p> <ul style="list-style-type: none"> • SOM1050 is set to ON • SOM1050 is set to OFF <p>Mode 1058 = OFF (default):</p> <ul style="list-style-type: none"> • SOM1050 is set to ON • SOM1050 is set to OFF 	OFF	Both

Mode	Category	Description	Default	MCU/RCU
		Notes: <ol style="list-style-type: none"> 1. Depending on the I/O pattern, I/O response might be affected. 2. Depending on the condition, initial copy time might be affected. 3. The mode is related to SOM1050. 4. OPEN non-DP VOLs do not support hierarchical memory differential management so that the mode cannot be applied. 5. To downgrade the microcode, the procedure described in Maintenance Manual Function ID 01:03 described in 03 MICRO-FC. is required. Refer to the manual before applying the mode. 6. The mode is applied when increasing the number of pairs that can be created on a system or the user capacity for pairs is desired. 7. The differential BMP managed in hierarchical memory does not use the shared memory, but the differential data is managed in a pool with which the volumes are associated. For the pool capacity necessary for the differential data management, refer to "Differential Data" in the Hitachi TrueCopy® User Guide, Hitachi TrueCopy® for Mainframe User Guide, Hitachi Universal Replicator User Guide, Hitachi Universal Replicator for Mainframe User Guide, and the Global-Active Device User Guide 8. Before using this SOM to increase pair volumes on the storage system, reexamine the resource on the storage system to make sure all performance requirements are met. 		
1070	global-active device	<p>The mode changes the processing for a group operation with GAD consistency group.</p> <p>Mode 1070 = ON:</p> <p>The status change of all pairs in a consistency group. is performed for 50 msec.</p> <p>Mode 1070 = OFF (default):</p> <p>The status change of all pairs in a consistency group. is performed for 1 msec.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. The mode is applied when reducing the time to complete status change of all pairs in a consistency group at a group operation (suspension and resync operation) with the GAD CTG function. 2. The VSD usage rate increases during status change of all pairs in a consistency group. 	OFF	Both

SOM details

This section provides detailed information for several of the SOMS described in the above table.

Details for SOM 15

Table 41 SOM 15 functions

Operation with Mode 15 ON	Operation with Mode 15 OFF
Upper limit for retry of drive is reduced from 2 sec to 0.5 sec.	Upper limit for retry of drive is 2 sec
If a drive failure occurs in read processing, a correction read processing is executed immediately.	If a drive failure occurs in read processing, a retry processing corresponding to the type of failure is executed
I/O watching time is reduced from 6.5 sec to 4.5 sec.	I/O watching time is 6.5 sec.
Read or write processing is not retried for time-out failure.	Read or write processing is retried for time-out failure

Details for SOM 122

Table D-3 shows the results of the pairsplit/pairresync command from CCI.

Table 42 SOM 122 pairsplit operations

CCI setting			Controller setting	Split type
Command	-fq option	Environment variable HORCC_SPLT	System Option Mode122	
pairsplit	Normal	None	ON	Steady Split
			OFF	Steady Split
		Normal	ON	Steady Split
			OFF	Steady Split
		Quick	ON	Steady Split
			OFF	Steady Split
	Quick	None	ON	Quick Split
			OFF	Quick Split
		Normal	ON	Quick Split
			OFF	Quick Split
		Quick	ON	Quick Split
			OFF	Quick Split
	None	None	ON	Steady Split
			OFF	Quick Split
		Normal	ON	Steady Split
			OFF	Steady Split
		Quick	ON	Quick Split
			OFF	Quick Split

Table 43 SOM 122 pairresync operations

CCI setting			Controller setting		Split type
Command	-fq option	Environment variable HORCC_SPLT	System Option Mode87	System Option Mode122	
pairresync	Normal	None	ON	ON	Normal Resync
				OFF	Normal Resync
			Normal	ON	Normal Resync
				OFF	Normal Resync
		Normal	Quick	ON	Normal Resync
				OFF	Normal Resync
			None	ON	Normal Resync
				OFF	Normal Resync
		Quick	Normal	ON	Normal Resync
				OFF	Normal Resync
			Quick	ON	Normal Resync
				OFF	Normal Resync
	Quick	None	ON	ON	Quick Resync
				OFF	Quick Resync
			Normal	ON	Quick Resync
				OFF	Quick Resync
		Normal	Quick	ON	Quick Resync
				OFF	Quick Resync
			None	ON	Quick Resync
				OFF	Quick Resync
		Quick	Normal	ON	Quick Resync
				OFF	Quick Resync
			Quick	ON	Quick Resync
				OFF	Quick Resync
	None	None	ON	ON	Normal Resync
				OFF	Quick Resync
			Normal	ON	Normal Resync
				OFF	Normal Resync
		Normal	Quick	ON	Normal Resync
				OFF	Normal Resync
			None	ON	Normal Resync
				OFF	Normal Resync
		Quick	Normal	ON	Quick Resync
				OFF	Quick Resync
			Quick	ON	Quick Resync
				ON	Quick Resync

CCI setting			Controller setting		Split type
Command	-fq option	Environment variable HORCC_SPLT	System Option Mode87	System Option Mode122	
				OFF	Quick Resync

Details for SOM 269

For Device Manager - Storage Navigator operations, only low speed format is available. See the following table for SVP operations

Table 44 SOM 269: SVP operations

Operation	Target of Operation	Mode 269 ON	Mode 269 OFF
PDEV Addition	-	High speed	High speed
VLL (CVS)	All LDEVs in a PG	No format	No format
VLL (CVS)	Some LDEVs in a PG	No format	No format
Format	PG is specified	High speed	High speed
Format	All LDEVs in a PG	High speed	Low speed
Format	Some LDEVs in a PG	Low speed	Low speed

Details for SOM 467

Table 45 SOM 467 default setting

Storage system	Default setting
Hitachi Virtual Storage Platform G1000	ON (all microcode levels)

Details for SOM 729

Table 46 SOM 729 behavior

SOM 729	Protect V-VOLs when I/O fails to Full Pool	Behavior
OFF	Disabled	DRU Protect attribute is not set
OFF	Enabled	DRU Protect attribute is set
ON	Disabled	DRU Protect attribute is not set
ON	Enabled	DRU Protect attribute is set

Details for SOM 784

The following table lists the operational specifications for each combination of MCU and RCU with TrueCopy for Mainframe and Continuous Access Synchronous.

Table 47 SOM 784 operational specifications

MCU and RCU			Operational specification	
Model	Microprogram version	SOM 784 setting	Pair creation, resync	RI/O MIH time reduction
VSP G1000	All supported versions	OFF	Normal end	Disabled
VSP G1000	All supported versions	ON	Normal end	Enabled

Details for SOM 803

Table 48 SOM 803 behavior

SOM 803	Protect V-VOLs when I/O fails to Blocked Pool VOL	Behavior
OFF	Disabled	DRU Protect attribute is not set
OFF	Enabled	DRU Protect attribute is set
ON	Disabled	DRU Protect attribute is not set
ON	Enabled	DRU Protect attribute is set

Details for SOM 855

Table 49 SOM 855 behavior with SOM 467

SOM 467	SOM 855	WP				
		To 57%	58% to 60%	61% to 63%	64% to 75%	Over 76%
ON	ON	Normal copy	Copy after destaging		Copy stops	
	OFF	Normal copy		Copy stops		
OFF	ON/OFF	Normal copy				Copy stops

Details for SOM 897, SOM 898, and SOM 901

Table 50 Relations among SOM897, SOM898, and SOM901

SOM 901	Type of Tier1	Tier1 and Tier2 gray zone	Tier2 and Tier3 gray zone
ON	SSD	SOM 901	Combination of SOM 897 &SOM 898
	Not SSD	Combination of SOM 897 & SOM 898	
OFF	SSD	Combination of SOM897 & SOM898	

Details for SOM 901

Table 51 Relations between SOM930, SOM755 and SOM859

SOM 930	SOM 755	SOM 859	I/O synchronous page discarding	VOL batch page discarding	Write Same	UNMAP
OFF	OFF	OFF	Enabled	Enabled	Enabled	Enabled
OFF	OFF	ON	Disabled	Enabled	Enabled	Enabled
OFF	ON	OFF	Disabled	Disabled	Disabled	Disabled
OFF	ON	ON	Disabled	Disabled	Disabled	Disabled
ON	OFF	OFF	Enabled	Disabled	Enabled	Enabled
ON	OFF	ON	Disabled	Disabled	Enabled	Enabled
ON	ON	OFF	Disabled	Disabled	Disabled	Disabled
ON	ON	ON	Disabled	Disabled	Disabled	Disabled



Regulatory compliance

This appendix includes a comprehensive set of specifications for the VSP G1000 storage system storage system described in this manual. The Regulatory Compliance section includes a table of regulatory specifications that are met by the VSP G1000 storage system. Following the tables are individual regulatory statements that explain the requirements of various countries.

- ☐ [Regulatory compliance](#)
- ☐ [US FCC Notice](#)
- ☐ [European Declaration of Conformity](#)
- ☐ [Notice of export controls](#)
- ☐ [Hazardous and toxic substances](#)
- ☐ [Disposal](#)
- ☐ [Recycling](#)
- ☐ [Electronic emissions certificates](#)

Regulatory compliance

This equipment has been tested and is certified to meet the following standards:

Table 52 VSP G1000 certifications

Standard	Specification	Mark on the product	Country
Electronic emission control	FCC Part 15 Subpart B Class A	Yes (FCC)	U.S.A
Electronic emission control	FCC Part 15 Subpart B Class A:2010, Class A ICES-003 Issue 4 Class A	Yes (UL)	Japan
Safety certification	TUV Safety Report and TUV-NRTL Certification, FCC Verification Report	Yes (TUV)	EU, North America
Electronic emission certifications	TUV Safety Report, EMC Report, TUV GS License, EMC Certificate, CE Mark	Yes (CE Mark)	European Union
Electronic emission control	CB Report and Certificate	Yes (TUV)	Worldwide
Electronic emission control	Test Report for C-Tick Approval	Yes	Australia and New Zealand
VCCI Registration for Product and Accessories	VCCI Class A	Yes (VCCI)	Japan
Safety certification	GOST Certificate for Product and Accessories	Yes (GOST)	Russia
Electronic emission control	BSMI Approval for Product and Accessories	Yes (BSMI)	Taiwan
Electronic emission control	RRL Approval and KTL Safety Approval	Yes (RRL)	Korea
Safety certification	IRAM Approval	Yes	Argentina
Electronic emission control	CCC Approval for Switching Power Supply	Yes (IRAM)	China

Table 53 VSP G1000 certifications by region

	Region	Regulatory	Standard	Certificate No. and Report No.	
Safety	Worldwide	CB	IEC60950-1:2005+A1	Certificate Numbers	JPTUV-053187-M2 JPTUV-053211-A1

	Region	Regulatory	Standard	Certificate No. and Report No.	
					PTUV-048773-M1
				Report Numbers	12030097 12030890 12028263
				Photo Documentation Numbers	12030097 12030890 12028263
	North America	cTUVus	UL60950-1:2007 CAN/CSA-C22.2 No. 60950-1-07+A1	Test Report No. Certificate Numbers	USA-JT 12030098 CU72133020 CU72133022 CU72120935
	European Union	TUV	+A11+A1+A12	Certificate Numbers	S1-50266086 S1-50266254 S1-50245594
	Argentina	IRAM	IEC60950-1:2005+A1	Certificate Numbers	RA3385104E,204E,205E RA3385103E,202E,203E RA3283003E
	Safety EMC	Russia	EAC TP TC 004/2011 TP TC 020/2011	Certificate Numbers	RA3283003E RU C-JP.AR46.B.60400 RU C-JP.AR46.B.60634
	North America	FCC	FCC Part15 Subpart B Class A EICES-003 Issue:2012 Class A	Test Report No.	10033930S-C 10057416S-C 10162445S-D
	European Union	EN	EEN55022:2010 EEN55024:2010 EEN61000-3-2:2006 +A1+A2 EEN61000-3-3:2008	Certificate No. Test Report Numbers	CJ50268193 12030583-001 12030583-003 12030583-004
EMC	Australia and New Zealand	C-Tick RCM	AS/NZS CISPR 22:2009+A1 Class A	Test Report Numbers	10033930S-B 10057416S-B 10162445S-C
	Taiwan	BSMI	CNS13429/CNS14336-1	Declaration of Conformity	Declaration of Conformity
	South Korea	KCC	KN22KN24	Certificate No.	MSIP-REM-HTB-DKC810

	Region	Regulatory	Standard	Certificate No. and Report No.	
	Region	Regulatory	Standard	Model	Certificate No.
Safety EMC	China	CCC	GB4943-2011GB9254-2008GB17625.1-2003	SBX/UBX_SWPSTDPS-600FB XX	2011010907455767
				FBX_SWPSPPD6001	2012010907575263

US FCC Notice

FCC Notice

Federal Communications Commission

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case users will be required to correct the interference at their own expense.

Electronic emissions testing

EMI testing was done with shielded cables. Therefore, in order to comply with the FCC regulations, you must use shielded cables with your installation.

The EMI tests were done in the following configurations:


DKC810I-CBX+DKC+F810I-SBX

DKC810I-CBX+DKC+F810I-SBX+DKC-F810I-UBX

Copies of the Underwriters Laboratories EMI compliance certificates are located at the end of this chapter.

If trouble occurs in another configuration, a user may be requested to take appropriate preventive measures.

European Declaration of Conformity

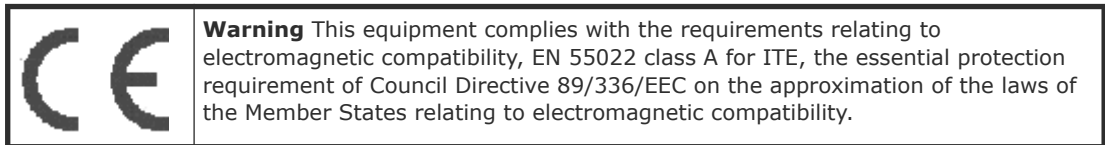



"EINE LEICHT ZUGÄNGLICHE TRENN-VORRICHTUNG, MIT EINER KONTAKT-ÖFFNUNGSWEITE VON MINDESTENS 3mm IST IN DER UNMITTELBAREN NÄHE DER VERBRAUCHERANLAGE ANZUORDEN (4-POLIGE ABSCHALTUNG)."

Maschinen lärm informations verordnung 3. GSGV, 18.01.1991: Der "höchste" Schalldruckpegel beträgt 70 db (A) oder weniger gemäß ISO 7779

CLASS 1 LASER PRODUCT




 **Warning:** This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

 **Warning:** Dies ist ein Produkt der Klasse A. In nichtgewerblichen Umgebungen können von dem Gerät Funkstörungen ausgehen, zu deren Beseitigung vom Benutzer geeignete Maßnahmen zu ergreifen sind.

Notice of export controls

Export of technical data contained in this document may require an export license from the United States government and/or the government of Japan. Contact the Hitachi Legal Department for any export compliance questions

China RoHS

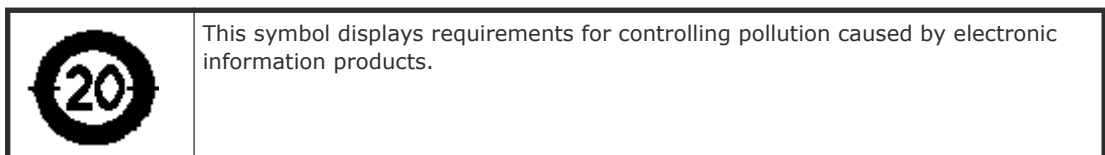


Hazardous and toxic substances


Table 54 Hazardous and toxic substances

Toxic and Hazardous Substances and Elements						
Unit	Lead (PB)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr (VI))	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
Controller chassis	X	O	O	O	O	O
Drive chassis	X	O	O	O	O	O
<p>The Symbol O indicates that this toxic or hazardous substances contained in all of the homogeneous materials for this part is below this limit requirement in SJ/T 11363-2006.</p> <p>The symbol X indicates that this toxic or hazardous substances contained in at least one of the homogeneous materials used for this part is above the limit requirement in SJ/T 11363-2006.</p>						

Disposal

	<p>Note: This symbol on the product or on its packaging means that your electrical and electronic equipment should be disposed at the end of life separately from household wastes. There are separate collection systems for recycling EU and many cities in the USA. For more information, contact the local authority or the dealer where you purchased the product.</p>
--	--

Recycling

	<p>The cache backup battery unit includes a nickel-hydride battery. A nickel-hydride battery should be recycled when it is no longer usable. When you replace the battery unit, do not dispose of the old one in the trash. Recycle the battery instead. The mark posted on the battery unit is a three-arrow mark that means a recyclable part.</p>
---	--

Electronic emissions certificates

Copies of the Underwriters Laboratories EMI compliance certificates are located on the following pages. Contact Hitachi Data Systems support for detailed information if needed.



Test report No. : 10162445S-D
Page : 1 of 22
Issued date : January 31, 2013

EMI TEST REPORT

Test Report No. : 10162445S-D

Applicant: Hitachi Ltd.

Type of Equipment: Disk Storage System - RAID800

Model No.: DKC8101-CBXA, DKC-F8101-CBXB
DKC-F8101-SBX (MDKC8101-SBX (x8))
DKC-F8101-UBX (MDKC8101-UBX (x8))
DKC-F8101-FBX (MNF100R8-BOX (x4))

Test regulation: FCC Part 15 Subpart B:2013 ClassA
ICES-003 Issue 5:2012 ClassA

Test result: Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: January 21 - 24 , 2014

Representative test engineer: *M. Hosaka*
Makoto Hosaka
Engineer of WiSE Japan,
UL Verification Service

Approved by: *I. Isozaki*
Ichiro Isozaki
Leader of WiSE Japan,
UL Verification Service



- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
- ☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.
1-22-3 Megumioka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone: +81 463 50 6400
Facsimile: +81 463 50 6400

13-EM-F0429

Figure 41 UL EMI compliance certificate (1 of 3)



Test report No. : 10162445S-C
Page : 1 of 23
Issued date : January 31, 2014

EMI TEST REPORT

Test Report No.: 10162445S-C

Applicant: Hitachi Ltd.
Type of Equipment: Disk Storage System - RAID800
Model No.: DKC810I-CBXA, DKC-F810I-CBXB
DKC-F810I-SBX (MDKC810I-SBX (x8))
DKC-F810I-UBX (MDKC810I-UBX (x8))
DKC-F810I-FBX (MNF100R8-BOX (x4))
Test standard: AS/NZS CISPR 22:2009+A1:2010 classA
Test Result: Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above standard.
4. The test results in this test report are traceable to the national or international standards.
5. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test:

January 21 - 24, 2014

**Representative
test engineer:**

M. Hosaka

Makoto Hosaka
Engineer of WiSE Japan,
UL Verification Service

Approved by:

I. Isozaki

Ichiro Isozaki
Leader of WiSE Japan,
UL Verification Service



- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

13-EM-F0429

Figure 42 Test certificate

	Ref. Certif. No. JPTUV-048773-M1
---	--

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME	SYSTEME CEI D'ACCEPTATION MUTUELLE DE CERTIFICATS D'ESSAIS DES EQUIPEMENTS ELECTRIQUES (IECEE) METHODE OC
--	--

CB TEST CERTIFICATE	CERTIFICAT D'ESSAI OC
----------------------------	------------------------------

<p>Product Produit</p> <p>Name and address of the applicant Nom et adresse du demandeur</p> <p>Name and address of the manufacturer Nom et adresse du fabricant</p> <p>Name and address of the factory Nom et adresse de l'usine</p> <p>Ratings and principal characteristics Valeurs nominales et caractéristiques principales</p> <p>Trademark (if any) Marque de fabrique (si elle existe)</p> <p>Type of Manufacturer's testing Laboratories used Type de programme du laboratoire d'essais constructeur</p> <p>Model / Type Ref. Ref. de type</p> <p>Additional information (if necessary may also be reported on page 2) Les informations complémentaires (si nécessaire, peuvent être indiquées sur la 2^{ème} page)</p> <p>A sample of the product was tested and found to be in conformity with Un échantillon de ce produit a été essayé et a été considéré conforme à la</p> <p>As shown in the Test Report Ref. No. which forms part of this Certificate Comme indiqué dans le rapport d'essais numéro de référence qui constitue partie de ce Certificat</p>	<p>Flash Module Drive Box</p> <p>Hitachi, Ltd. 322-2 Nakazato Odawara-shi, Kanagawa, 250-0872 JAPAN</p> <p>Hitachi, Ltd. 322-2 Nakazato Odawara-shi, Kanagawa, 250-0872 JAPAN</p> <p>Hitachi, Ltd. 2880 Kozu Odawara-shi, Kanagawa, 256-8510 JAPAN</p> <p>1) AC 200-240V; 50/60Hz; 2 x 1.3A 2) AC 100-120/200-240V; 50/60Hz; 2x 2.6/1.3A Class I</p> <p>HITACHI</p> <p>TMP</p> <p>1) MNF100R-BQXxy, MNF100RB-BQXxxx (x, y = 0-9, A-Z or blank) 1) DW-F700-DBFxxx, HT-F405A-DBFxxx (x = A-Z or blank) 2) DF-F850-DBFxxx, HT-F4066-DBFxxx (x = 0-9, A-Z or blank)</p> <p>For model differences, refer to the test report. Re-issue of JPTUV-048773 dated 28.12.2012, due to first modification</p> <p>IEC 60950-1:2005+A1 National differences see test report</p> <p>12028263 002</p>
--	---

This CB Test Certificate is issued by the National Certification Body
Ce Certificat d'essai OC est établi par l'Organisme National de Certification

 TÜVRheinland®	<p>TÜV Rheinland Japan Ltd. Global Technology Assessment Center 4-25-2 Kita-Yamata, Tsuzuki-ku Yokohama 224-0021 Japan Phone +81 45 914-3888 Fax +81 45 914-3354 Mail: info@jpn.tuv.com Web: www.tuv.com</p> <p style="text-align: right;">  Dipl.-Ing. (FH) M. Geiser </p>
--	---

Date: 12.07.2013

Figure 43 Test certificate



Glossary

Index

A

- architecture
system 48

C

- certifications
 - compliance 186
 - Europe 189
 - Japan 189
 - US FCC 188
- chassis
 - controller 24
 - controller, components 24
 - drive 35
- checklist 71
- clearances
 - equipment 73
- components
 - drive chassis 35
- controller, components 24

D

- drive chassis components 35

E

- equipment
 - clearances 73
- equipment weight 74
- export controls 189

G

- guidelines
 - access by authorized personnel 66
 - cabling 66
 - earthquake safety 66
 - electrical safety 67
 - equipment modifications 66
 - fire protection 66
 - hazards 66

- loose clothing 66
- moving equipment 66
- operating in storms 66
- power cables 66
- safety glasses 66
- walkways and floors 66
- warning and safety labels 66
- work safety 66

H

- host modes 60, 61

L

- logical units 57, 58

M

- mainframe 58, 59
- memory
 - cache 39

O

- operations
 - battery backup 125
- option modes
 - system 144

P

- procedures
 - power off 124
 - power on 123

R

- RAID groups 49
- RAID implementation 49
- requirements 76
 - airflow 80

- cable length 34, 75
- circuit breakers 78
- data center 74
- delivery 71
- facilities 71
- general 66
- grounding 78
- installation 69, 70
- LAN 75
- operational 71, 75
- plugs 78
- power 71
- power connection 78
- safety 65, 70, 71
- service clearance 97
- site 73
- storage 71, 74
- responsibilities
 - support team 70
 - user 70

S

- safety 120
- specifications 76
 - cable length 134
 - drive 134
 - electrical 77
 - environmental 79, 141
 - equipment noise 84
 - heat output 80
 - load rating 97
 - mechanical 134, 138
- switches
 - power 123
- system reliability 21

T

- technological advances 21

Hitachi Data Systems

Corporate Headquarters

2845 Lafayette Street
Santa Clara, California 95050-2639
U.S.A.
www.hds.com

Regional Contact Information

Americas

+1 408 970 1000
info@hds.com

Europe, Middle East, and Africa

+44 (0) 1753 618000
info.emea@hds.com

Asia Pacific

+852 3189 7900
hds.marketing.apac@hds.com



MK-92RD8007-08