

View Progress Report

OPERATING INSTRUCTIONS

Copyright

© Ericsson AB 2017, 2018. All rights reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

Trademark List

All trademarks mentioned herein are the property of their respective owners. These are shown in the document Trademark Information.



Contents

1	Introduction	1
1.1	Prerequisites	1
2	Procedure	3



[View Progress Report](#)



1 Introduction

This document describes how to view the ongoing progress report or the result of the last backup operation. There is no historical information about earlier backup operation results.

1.1 Prerequisites

This section describes the prerequisites, which must be fulfilled before using the procedure.

1.1.1 Conditions

The following conditions must apply:

- A backup and restore management operation has been started.

Note: Scheduled backups are automatically started when a scheduled event is triggered.

- An Ericsson Command-Line Interface (ECLI) session in Exec mode is in progress.



[View Progress Report](#)



2 Procedure

To view the progress report of an operation:

1. Navigate to the relevant managed object as follows:

- For a backup or delete operation, for example:

```
>dn ManagedElement=<Node Name>,SystemFunctions=1,BrM=1,BrmBackupManager=USER_DATA
```

- For a restore operation, for example:

```
>dn ManagedElement=<Node Name>,SystemFunctions=1,BrM=1,BrmBackupManager=USER_DATA,BrmBackup=testBackup_20150616
```

2. Display the progress report for the operation as follows:

- For a backup or delete operation:

```
(BrmBackupManager=USER_DATA)>show
```

- For a restore operation:

```
(BrmBackup=testBackup_20150616)>show
```

Note: Since a long-running operation can be executing, it can be required to enter the command several times until the final operation result is shown in the progress report.

An example of a progress report for the creation of a manual backup is shown in Example 1.

Progress information can be read displaying attributes in progressReport. The progression of the values of important attributes during execution of a backup operation is shown in Table 1.

If the operation is successful, subattribute `result`=SUCCESS.

If the operation is unsuccessful, subattribute `result`=FAILURE and subattribute `resultInfo` in attribute `progressReport` reports an explanatory text message.

Table 1 Progress Values for Main Subattributes


Subattribute Name	Initial Value	Next Value	Next Value	Next Value	Final Value
progressPercentage	0	25	50	75	100
state	RUNNING	RUNNING	RUNNING	RUNNING	FINISHED



Table 1 Progress Values for Main Subattributes

Subattribute Name	Initial Value	Next Value	Next Value	Next Value	Final Value
result	NOT_AVAILABLE	NOT_AVAILABLE	NOT_AVAILABLE	NOT_AVAILABLE	SUCCESS
timeActionCompleted	1970-01-01T01:00:00	1970-01-01T01:00:00	1970-01-01T01:00:00	1970-01-01T01:00:00	2013-12-31T19:00:00

Note: Value 1970-01-01T01:00:00 shown for subattribute timeActionCompleted is used by default when no real value exists yet.

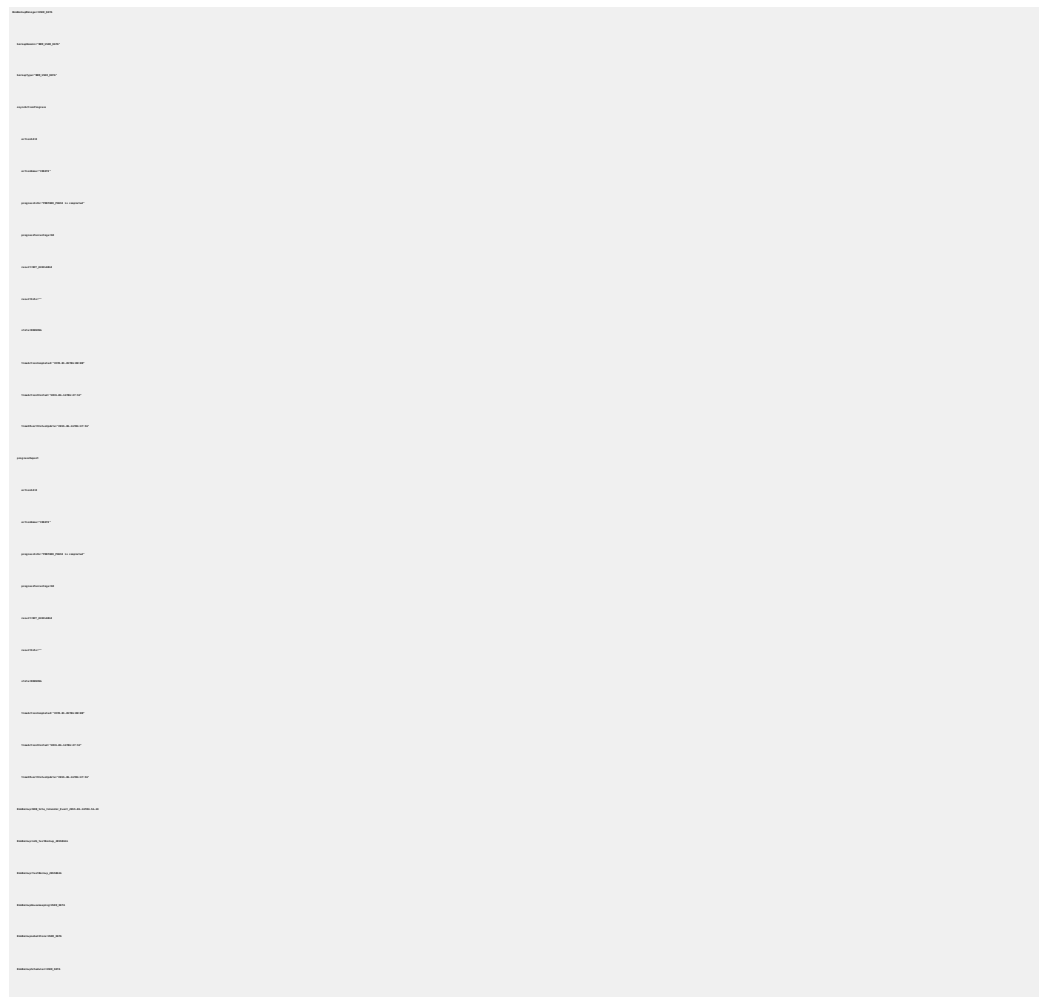

Example 1 Manual Backup Progress Report