




Dell Inspiron 13z N311z Memory Modules Replacement


Written By: Terrence15

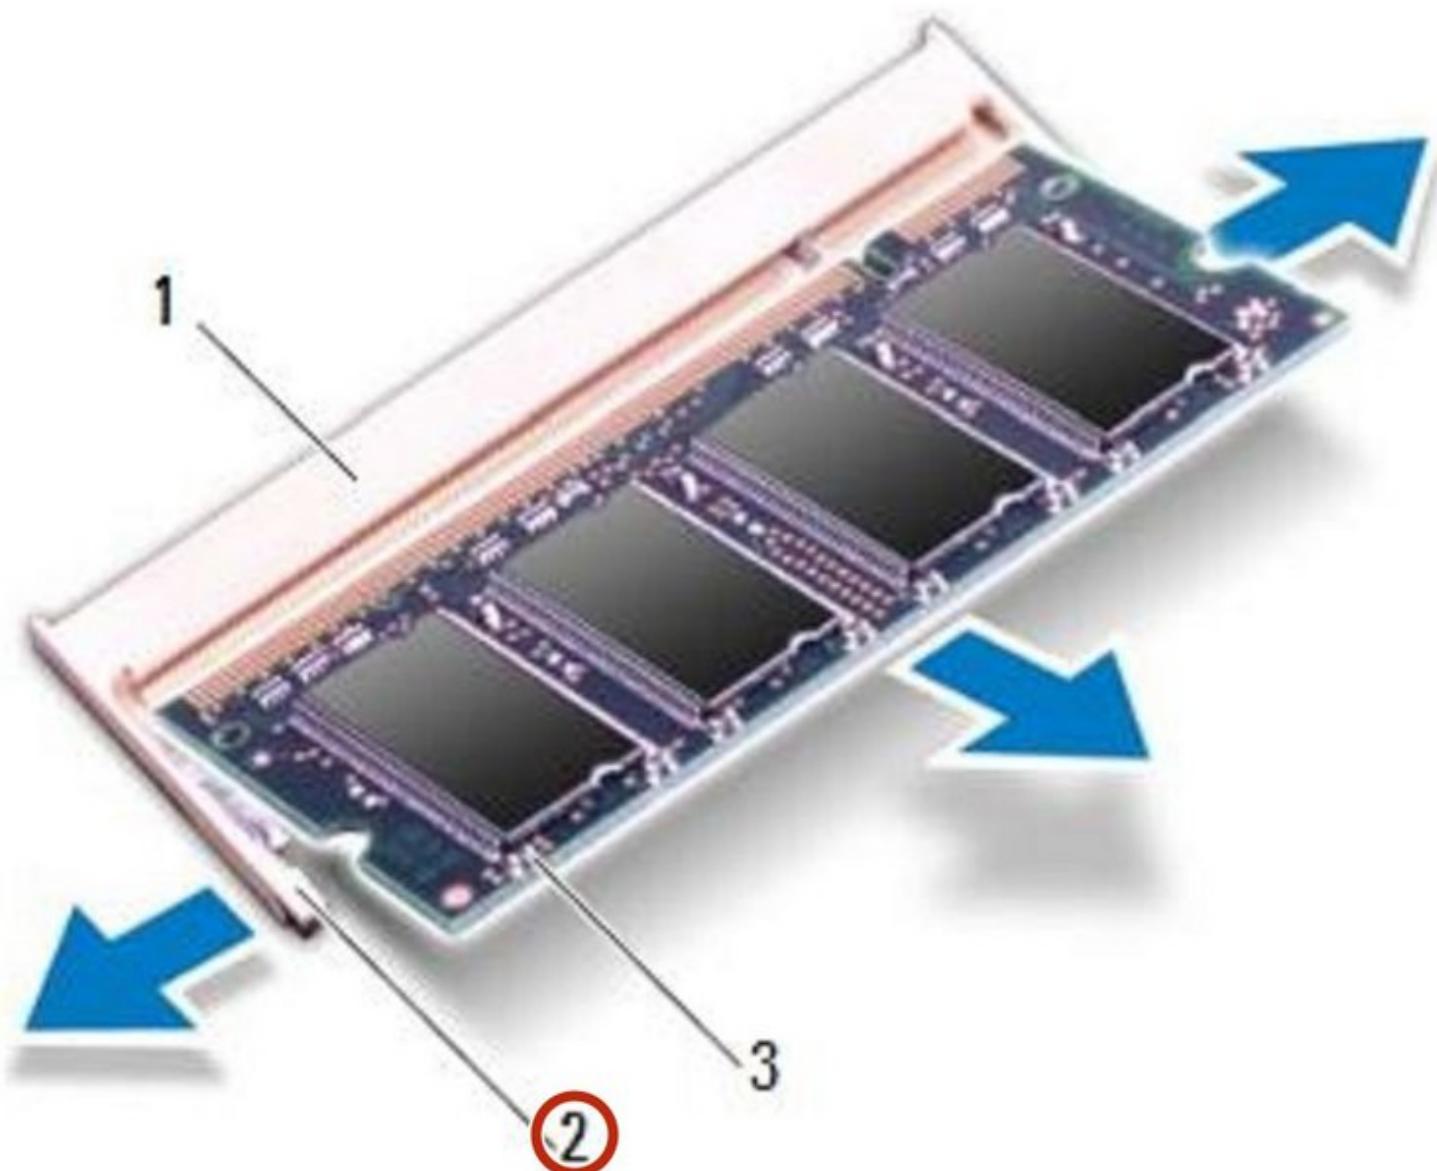

INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Modules.

Step 1 — Popping up the Memory Module

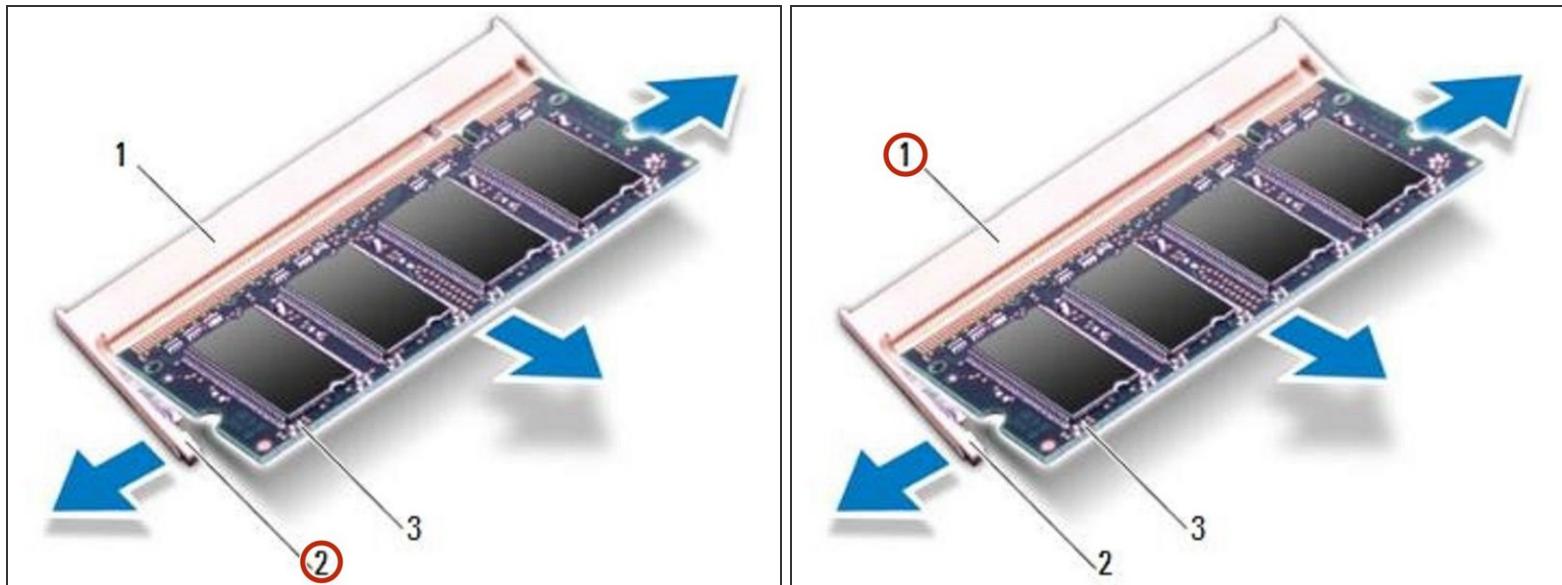


⚠️ WARNING: Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in ["Before You Begin"](#).

⚠️ CAUTION: To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).

⚠️ CAUTION: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.


- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the memory module pops up.

Step 2 — Removing the Memory Module

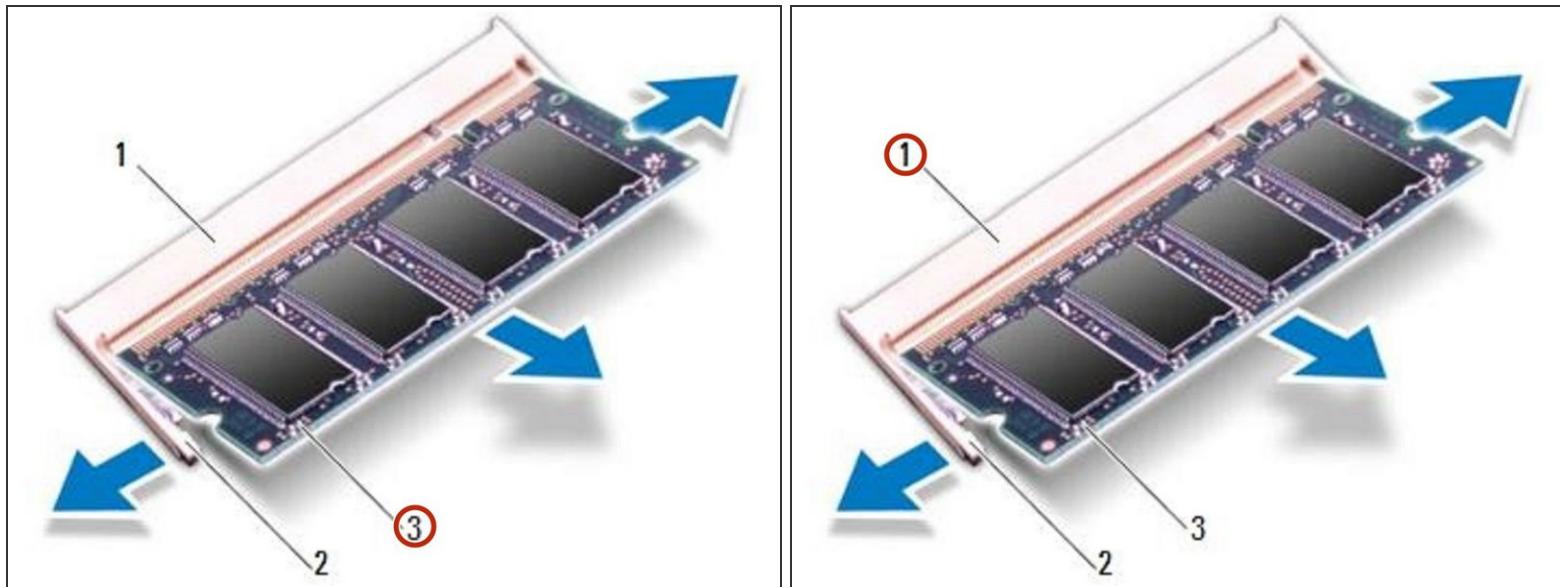


- Remove the memory module from the memory-module connector.

Step 3 — Align the Notch

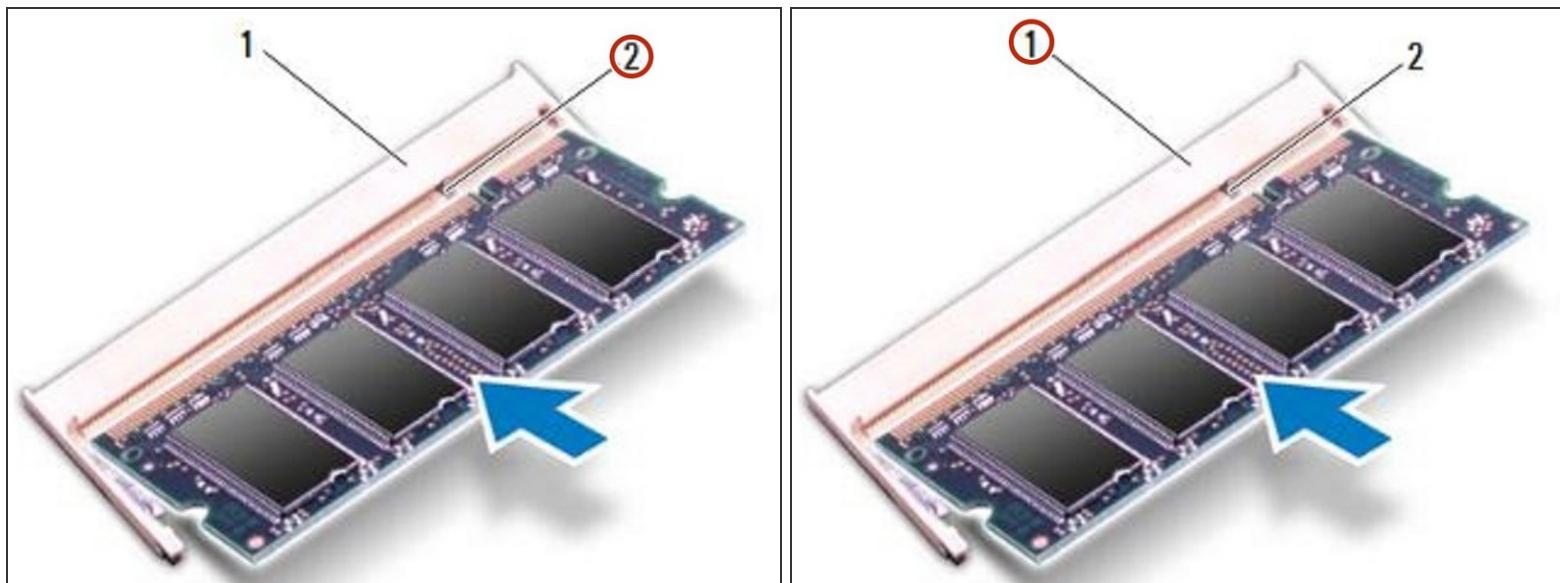

- Align the notch on the **NEW** memory module with the tab in the memory module connector.

Step 4 — Sliding the Memory Module

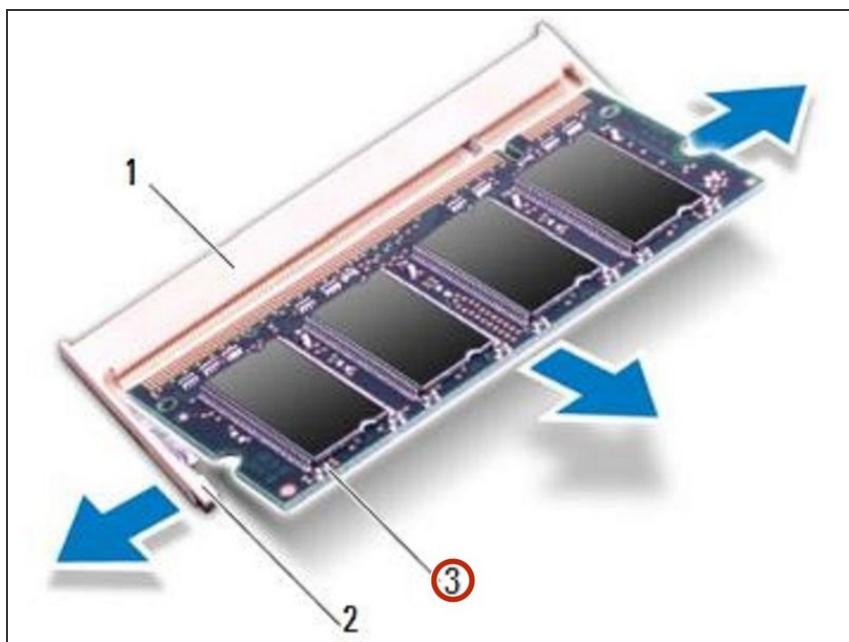

- Slide the memory module firmly into the memory-module connector at a 45-degree angle, and press the memory module down on both sides until it clicks into place. If you do not hear the click, remove the memory module and reinstall it.

(i) NOTE: If the memory module is not installed properly, the computer may not boot.