




Dell Inspiron 1501 Memory Modules Replacement

Written By: Terrence15

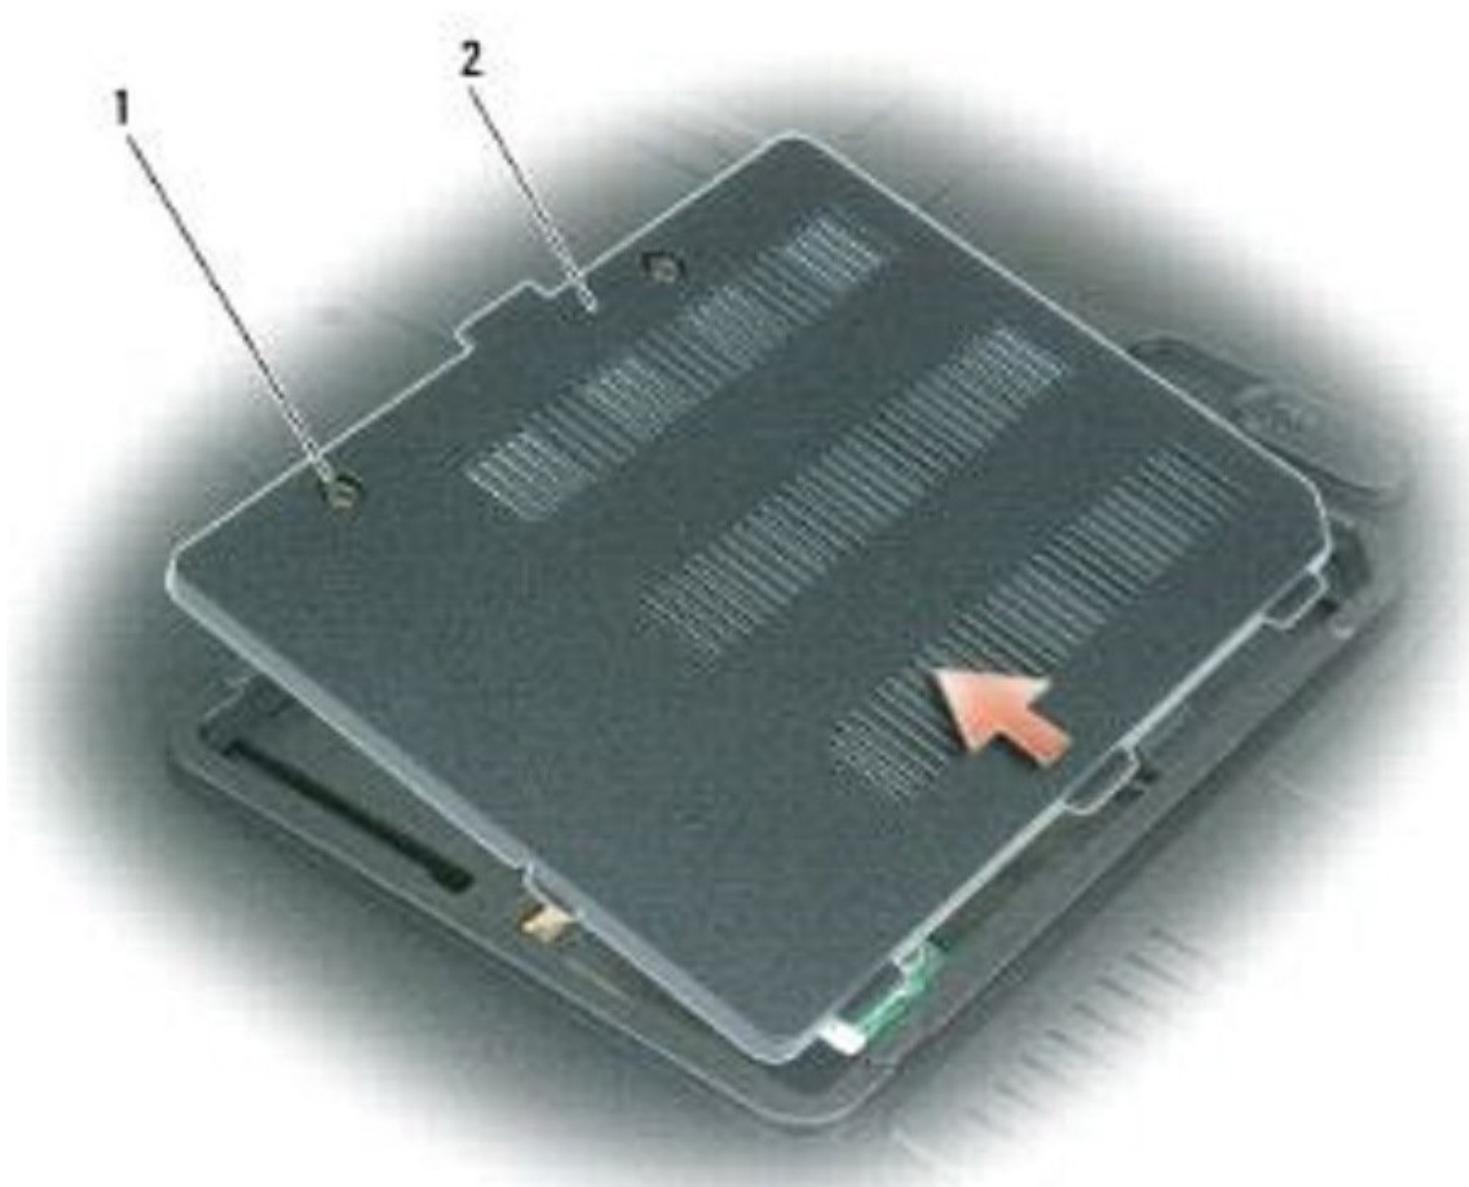


INTRODUCTION

In this guide, we will be showing you how to remove and replace the Memory Modules.

TOOLS:

- Phillips #0 Screwdriver (1)


Step 1 — Turn the Computer Over

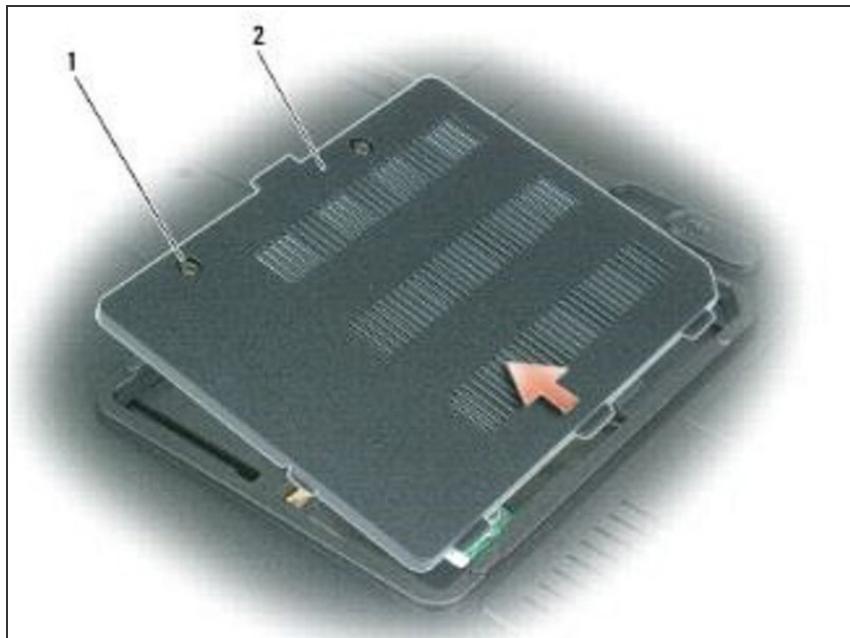

⚠ Follow the instructions in [Before You Begin](#).


- Turn the computer upside-down.

Step 2 — Loosen the Screws

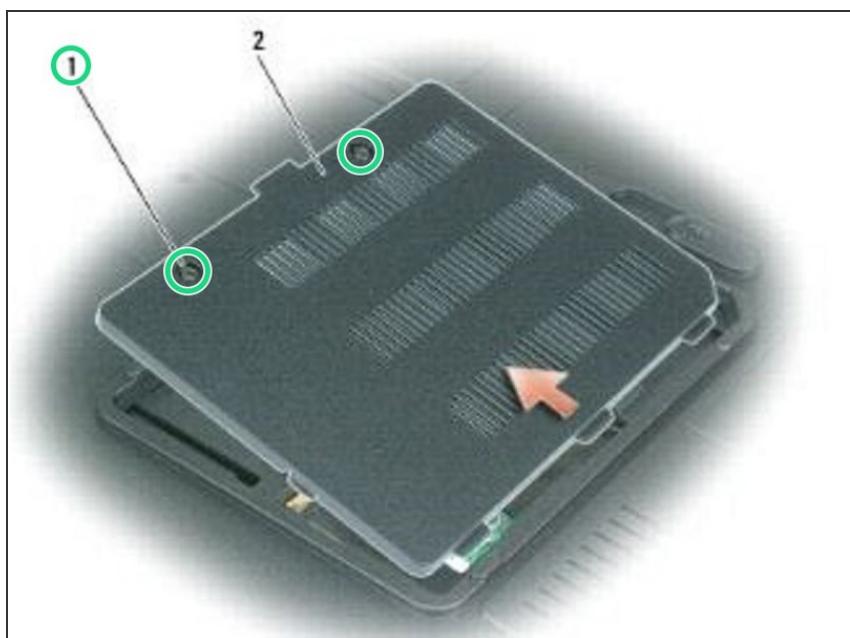

- Loosen the two captive screws on the memory module/modem cover and remove the cover.

Step 3 — Popping up the Memory Module

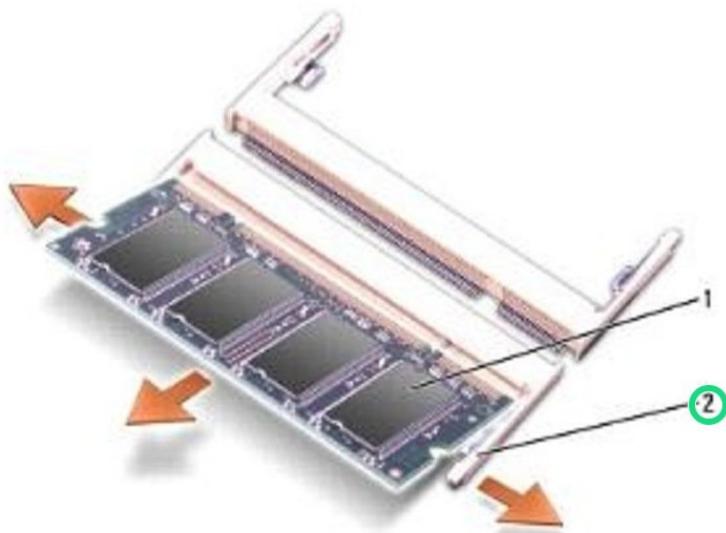


- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.

 **NOTICE:** To prevent damage to the memory module connector, do not use tools to spread the securing clips that secure the memory module.

 **NOTICE:** Handle memory modules by their edges, and do not touch the components on a module.

Step 4 — Popping up the Memory Module

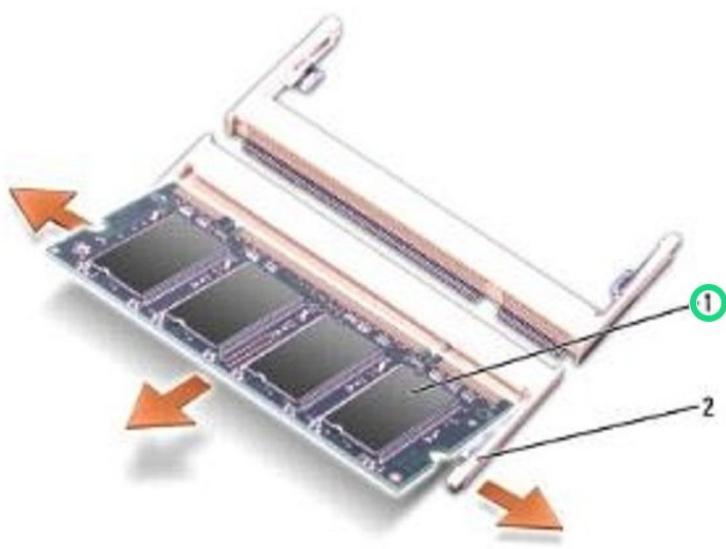


- Remove the module from the connector at a 45-degree angle.

Step 5 — Align the Notch



- Align the notch in the module edge connector with the tab in the connector slot.


Step 6 — Sliding the Module

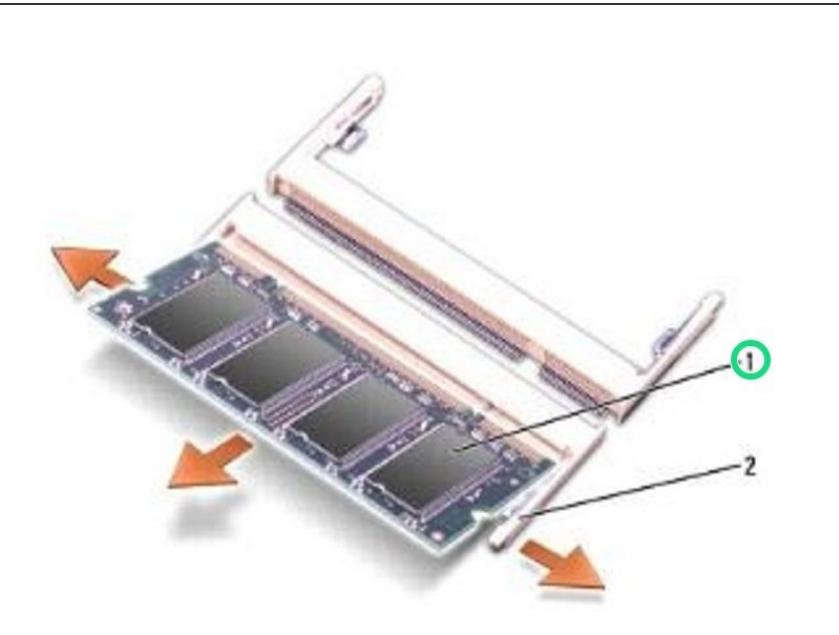

- Slide the **NEW** module firmly into the slot at a 45-degree angle, and lower the module until it clicks into place. If

you do not feel the click, remove the module and reinstall it.

Step 7 — Replace the Modem Cover

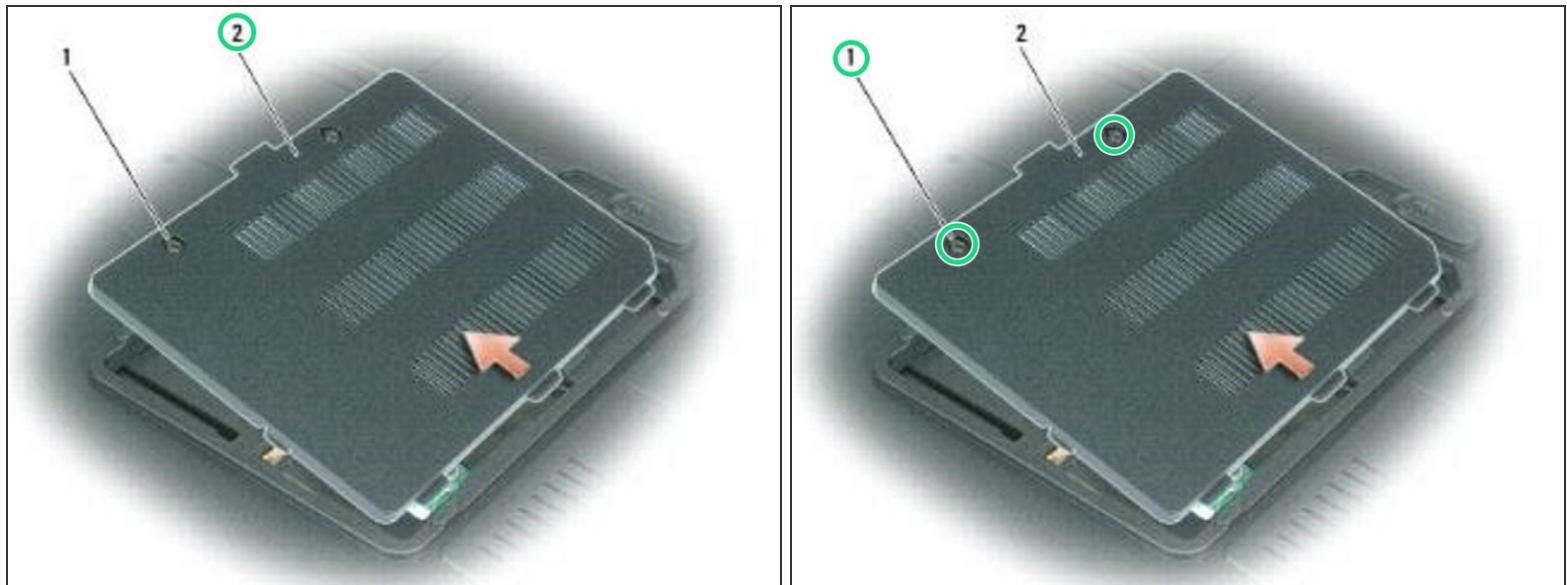

- Replace the memory module/modem cover and tighten the captive screws.

(i) NOTICE: If the memory module/modem cover is difficult to close, remove the module and reinstall it. Forcing the cover to close may damage your computer.