

SERVICE 501U TELEPHONE SETS

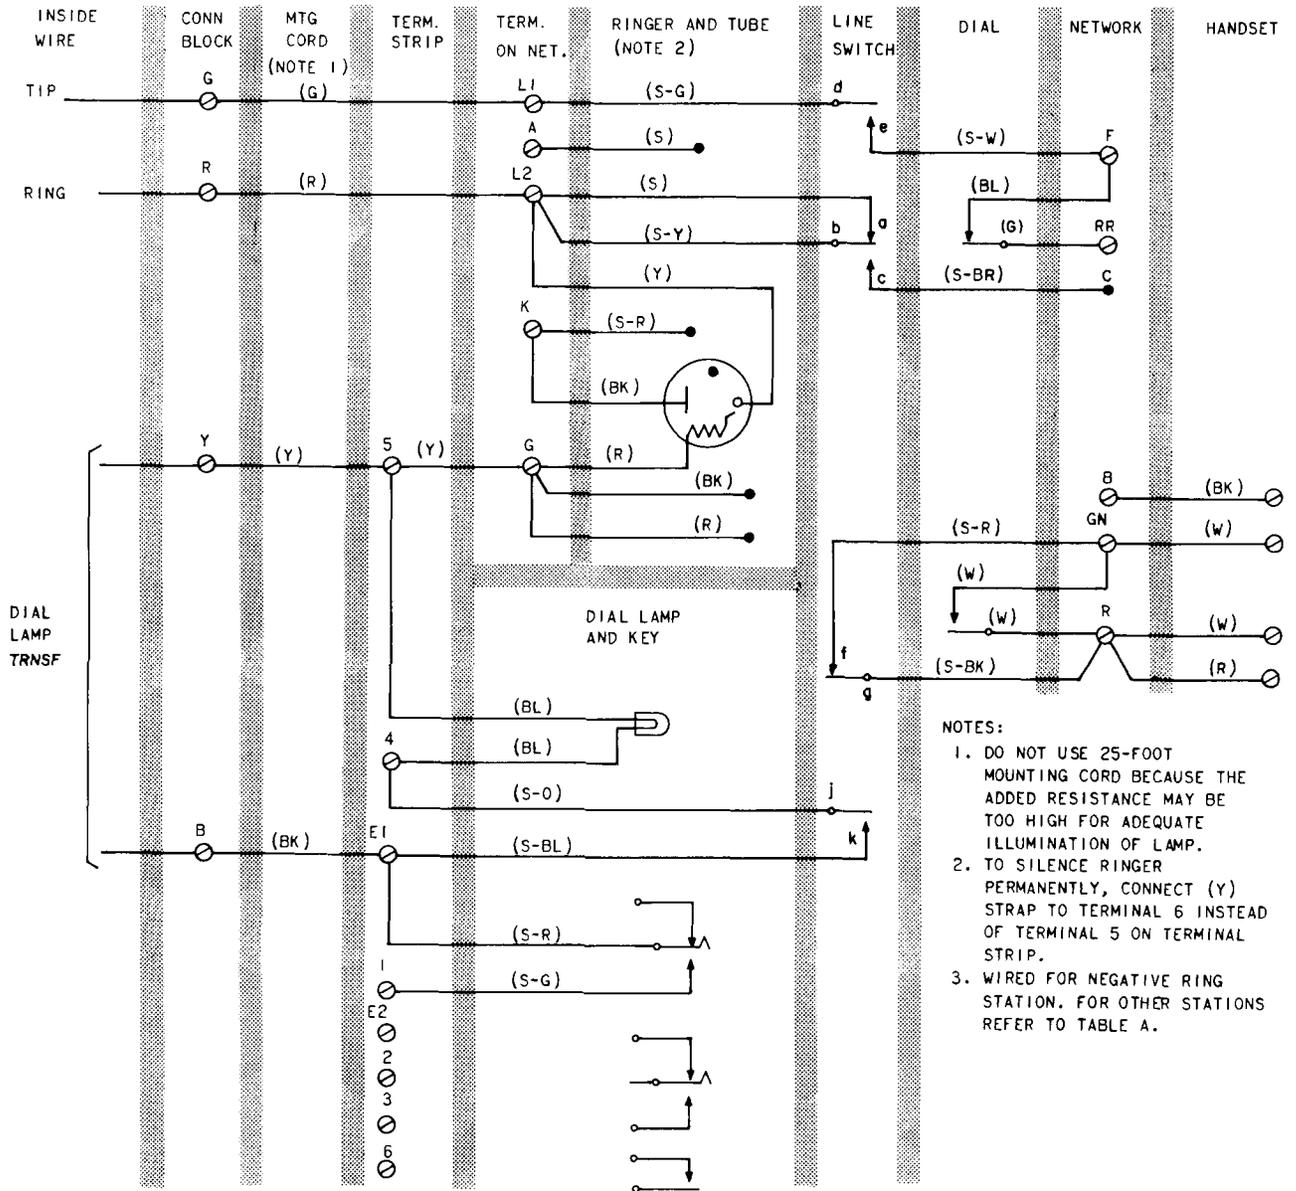


Fig. 1—501U (MD) Telephone Set, Connections

TABLE A
LINE, RINGER, AND TUBE CONNECTIONS

WIRE OR LEAD		NEGATIVE (-) PARTIES		POSITIVE (+) PARTIES	
		RING	TIP	RING	TIP
Trnsf Leads at Conn Block		Y	Y	Y	Y
		B	B	B	B
Mtg Cord at Conn Block	R	R	G	R	G
	G	G	R	G	R
	Y	Y	Y	Y	Y
	BK	B	B	B	B
Mtg Cord in Set	R	L2	L2	L2	L2
	G	L1	L1	L1	L1
	Y	5	5	5	5
	BK	E1	E1	E1	E1
Ringer Leads (See Note 2. Fig. 1)	R	L1	L1	L2	L2
	BK	G	G	L2	L2
	S	A	A	A	A
	S-R	K	K	K	K
Tube Leads	R	G	G	L2	L2
	BK	K	K	K	K
	Y	L2	L2	G	G