

35 KEYBOARD FOR AUTOMATIC SEND-RECEIVE SETS

ACTUAL WIRING DIAGRAMS

CONTENTS	PAGE
1. GENERAL .....	1
2. DIAGRAM INDEX (ATTACHMENTS) .	1

1. GENERAL

1.01 This section provides actual wiring diagrams for the 35 ASR Set keyboards.

1.02 The section is reissued to include the most current wiring information. Since this is a general revision, marginal arrows have been omitted.

1.03 The actual wiring diagrams, which are attached as a part of this publication, are listed in the diagram index. The index also lists the subject matter and current issue of each diagram.

1.04 These diagrams show the origin and termination of the various leads as well as the color coding of the leads for each of the components.

1.05 Notes are included on the diagrams to explain the symbols used or to point out certain special conditions that should be observed.

1.06 Schematic wiring diagrams for the keyboards will be found in the appropriate section for the set with which they are used.

2. DIAGRAM INDEX (ATTACHMENTS)

TITLE	SHEET NO.	DRAWING NUMBER	WD ISSUE
35 Keyboard LAK803 (Bell 35A)	1	5811WD	10
35 Keyboard LAK806 (Bell 35C)	1	6395WD	12
35 Keyboard LAK805	1	6454WD	6
35 Keyboards LAK804 & LAK811	1	6479WD	6
35 Keyboard LAK816 (Bell 35N)	2	7930WD	6
	CTRL		3
	1		3
35 Keyboard LAK817 (Bell 35R)	2	8147WD	2
	1		3
35 Keyboard LAK819 (Bell 35S)	CTRL	8409WD	1
	1		1
	2		1


# 5811 WD

## REVISIONS

ISSUE	DATE	AUTH. NO.
X2	6-25-62	73865
X3	7-13-62	73938
X4	9-26-62	74652
X5	10-29-62	74963
X6	2-12-63	75851
X7	3-13-63	76027
8	6-24-65	87329
9	11-25-66	91976-1
10	5-2-67	93362

### NO. NOTES

#### 1. WIRING LEGEND:

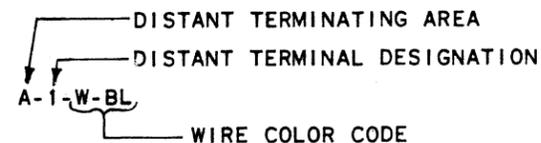

#### 2. COLOR CODE:


BK - BLACK	W-BK - WHITE-BLACK
BR - BROWN	W-BR - WHITE-BROWN
R - RED	W-R - WHITE-RED
O - ORANGE	W-O - WHITE-ORANGE
Y - YELLOW	W-Y - WHITE-YELLOW
G - GREEN	W-G - WHITE-GREEN
BL - BLUE	W-BL - WHITE-BLUE
P - PURPLE	W-P - WHITE-PURPLE
W - WHITE	W-S - WHITE-SLATE
S - SLATE	

#### 3. CONNECTOR VIEWED FROM BOTTOM.


#### 4. \* ASTERISK DENOTES 18 GA. WIRE

#### 5. THE 195648 STRAP IS NOT PRESENT IN EARLY MANUFACTURED UNIT.


**F**  
192013 KEYBOARD  
CONNECTOR (SEE NOTE 3)

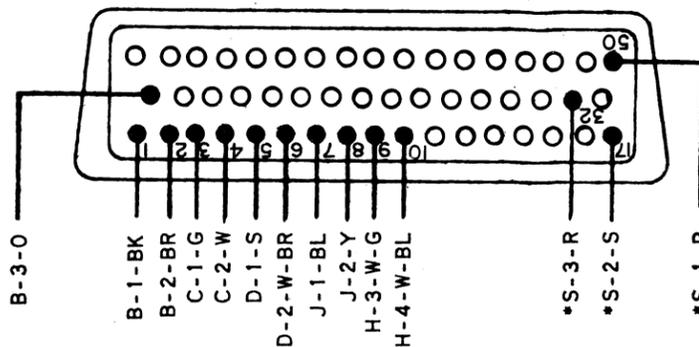


**S**  
151415  
MOTOR TERMINAL BLOCK

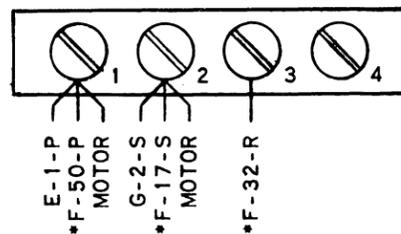


**G**  
BACKSPACE MAGNET

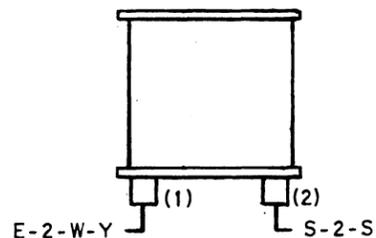


**H**  
REPERFORATOR SELECTOR  
MAGNETS

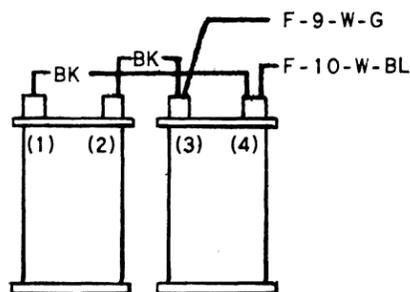


**E**  
151329  
BACKSPACE SWITCH




**D**  
178144 KEYBOARD  
UNIVERSAL CONTACT

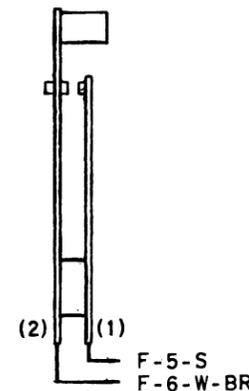


**C**  
324010  
192485 OR 319946  
TIMING CONTACT



**B**  
176352  
KEYBOARD  
SIGNAL GENERATOR

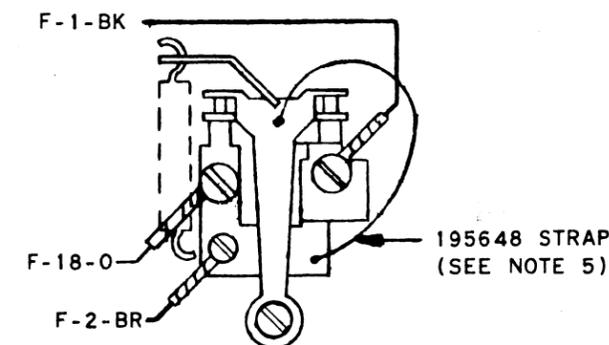

**J**  
END OF LINE  
INDICATOR SWITCH



ACTUAL  
 WIRING DIAGRAM  
 FOR MODEL 35  
 KEYBOARD  
 LAK803

### APPROVALS

D AND R E OF M

E-NUMBER

PROD. NO. 5811WD

DATE: 3-28-62

P.D. FILE NO. 1-30.151AA

DRAWN. V.E.S. CHKD.

ENGD. W.M.B. APPD.

TELETYPE  
CORPORATION

5811 WD


# 6395 WD

## REVISIONS


ISSUE	DATE	AUTH. NO.
A2	2-19-64	80153
B3	3-23-64	80166
B4	4-7-64	80159
5	6-25-64	82577
6	7-2-64	80159-1
7	8-13-64	83199
8	6-24-65	87329
9	8-16-66	91444
10	9-19-66	91848
11	1-23-66	91976-1
12	8-30-67	94468-D

- NO NOTES
- WIRING LEGEND:**  
 DISTANT TERMINATING AREA  
 DISTANT TERMINATING DESIGNATION  
 A-1-BK ← WIRE COLOR CODE
  - COLOR CODE:**  
 BK-BLACK      W-WHITE  
 BL-BLUE        R-RED  
 BR-BROWN      O-ORANGE  
 P-PURPLE       S-SLATE  
 G-GREEN        Y-YELLOW
  - CONNECTOR VIEWED FROM BOTTOM.
  - \*ASTERISKED DENOTES 18 GA. WIRE.
  - ASSOCIATED CABLE:  
199217 CABLE ASSEMBLY
  - NUMBERS IN PARENTHESIS ARE NOT MARKED ON COMPONENTS.
  - 
  - THE 154166 ARC SUPPRESSOR MUST BE DISCONNECTED IN SYSTEMS THAT EMPLOY THE 312325 OR 323609 REGENERATOR CARDS.


**A**  
MARGIN INDICATOR SWITCH  
155954




**B**  
CONTACT BOX ASSEMBLY  
197019

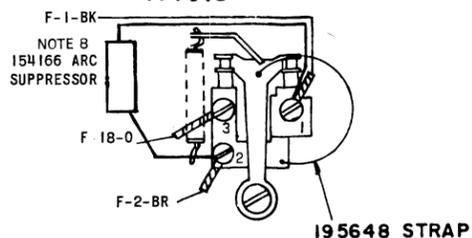


**C**  
TIMING CONTACT




**D**  
RECEIVE BREAK SWITCH

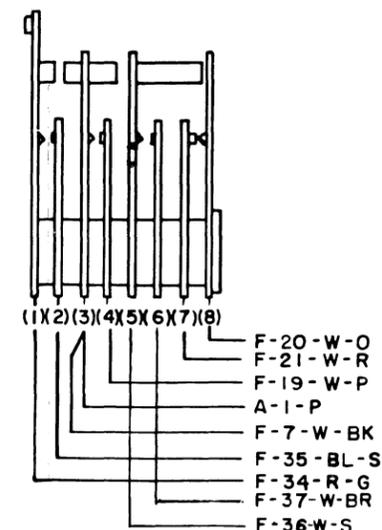


**E**  
BACKSPACE CONTACT




**F**  
KEYBOARD CONNECTOR  
192013

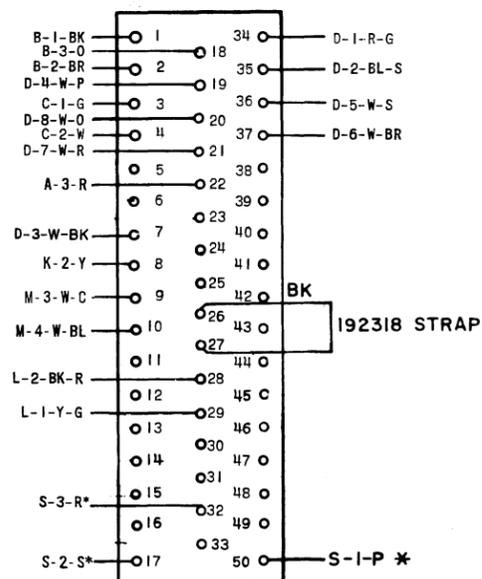


**G**  
BACKSPACE MAGNET  
(ON REPERFORATOR)

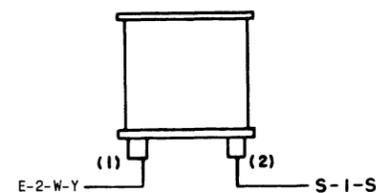


**L**  
CHARACTER COUNTER SUPPRESS COIL




**K**  
END OF LINE INDICATOR SWITCH



**M**  
REPERFORATOR SELECTOR MAGNETS

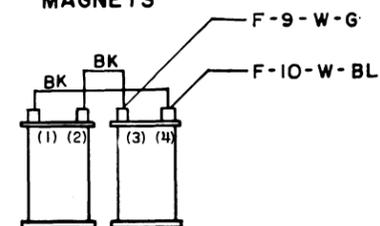

**S**  
MOTOR TERMINAL BLOCK  
151415



ACTUAL WIRING DIAGRAM FOR MODEL 35 KEYBOARD LAK806, 810, 821

APPROVALS

D AND R	E OF M
---	---

E-NUMBER

PROD. NO. 6395WD

DATE

P.D. FILE NO. 1-18.151AA

DRAWN	CHKD.
ENGD. W.E.C.	APPD.

TELETYPE CORPORATION

# 6395 WD


# 6454 WD

## REVISIONS

ISSUE	DATE	AUTH. NO.
2	1-28-64	79306
3	2-11-64	80148
4	5-11-64	82147
5	9-15-64	82608
6	6-24-65	87329

### NOTES

#### 1 WIRING LEGEND



#### 2 COLOR CODE

BK - BLACK	W-BK - WHITE-BLACK
BR - BROWN	W-BR - WHITE-BROWN
R - RED	W-R - WHITE-RED
O - ORANGE	W-O - WHITE-ORANGE
Y - YELLOW	W-Y - WHITE-YELLOW
G - GREEN	W-G - WHITE-GREEN
BL - BLUE	W-BL - WHITE-BLUE
P - PURPLE	W-P - WHITE-PURPLE
S - SLATE	W-S - WHITE-SLATE
W - WHITE	

#### 3 CONNECTOR VIEWED FROM BOTTOM.


#### 4 \* ASTERISK DENOTES 18 GA. WIRE

#### 5 ASSOCIATED CABLES


198247 CABLE ASSEMBLY  
 198252 CABLE ASSEMBLY

#### 6 REFER TO APPROPRIATE REPERFORATOR WIRING DIAGRAM FOR ADDITIONAL CONNECTIONS TO MOTOR TERMINAL BLOCK.


**A**  
MARGIN INDICATOR SWITCH  
155954




**B**  
KEYBOARD UNIVERSAL CONTACTS  
178144




**C**  
TIMING CONTACT




**D**  
RECEIVE BREAK SWITCH




**E**  
BACKSPACE CONTACT




**F**  
KEYBOARD CONNECTOR  
192013

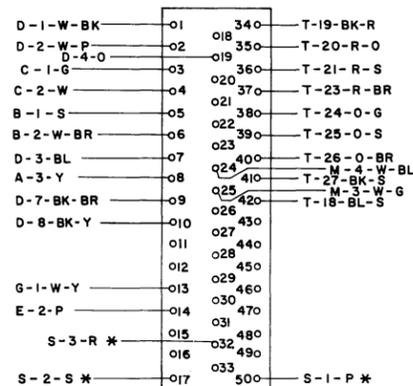


**G**  
BACKSPACE MAGNET  
(ON REPERFORATOR)




**M**  
REPERFORATOR SELECTOR MAGNETS



**S**  
MOTOR TERMINAL BLOCK  
151415



**T**  
MULTIPLE WIRE OUTPUT CONTACTS



ACTUAL WIRING DIAGRAM FOR MODEL 35 KEYBOARD LAK 305

### APPROVALS

D AND R  
**H.J.K.**

E OF M  
*[Signature]*

E-NUMBER  
PROD. NO. **6454 WD**

DATE **5-23-63**  
P.D. FILE NO. **1-18.151AA**

DRAWN **WP** CHKD. **J.A.C.**  
ENGD. **W.M.B.** APPD. **B.G.G.**

TELETYPE CORPORATION


# 6454 WD

REVISIONS


ISSUE	DATE	AUTH. NO.
2	10-8-64	83710
3	10-30-64	83869
4	1-22-65	85864
5	2-15-65	83740
6	6-24-65	87329

- NO. NOTES**
- WIRING LEGEND**  
  
 DISTANT TERMINATING AREA  
 DISTANT TERMINAL DESIGNATION  
 WIRE COLOR CODE  
 A-1-BK
  - CONNECTOR VIEWED FROM BOTTOM.
  - \* ASTERISK DENOTES 18 GA. WIRE.
  - ASSOCIATED CABLE:  
 199313 CABLE ASSEMBLY  
 192502 CABLE ASSEMBLY
  - NUMBERS IN PARENTHESIS ARE NOT MARKED ON COMPONENTS.


**A**  
MARGIN INDICATOR SWITCH  
155954




**B**  
CONTACT BOX ASSEMBLY  
176352

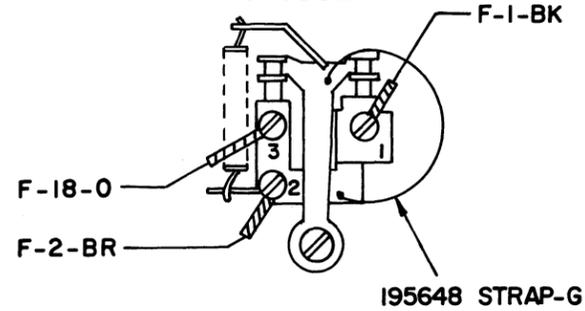


**C**  
TIMING CONTACT

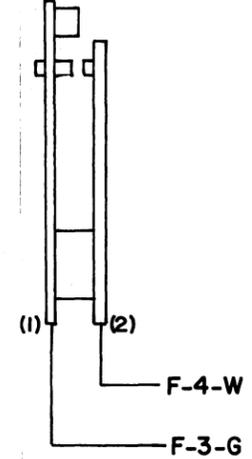


**D**  
KEYBOARD UNIVERSAL CONTACT  
178144

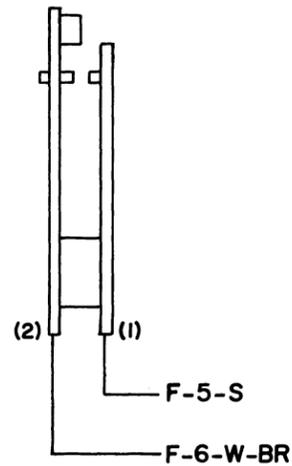

**E**  
BACKSPACE SWITCH  
151329

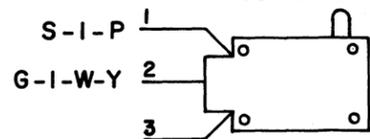

**F**  
KEYBOARD CONNECTOR  
192013

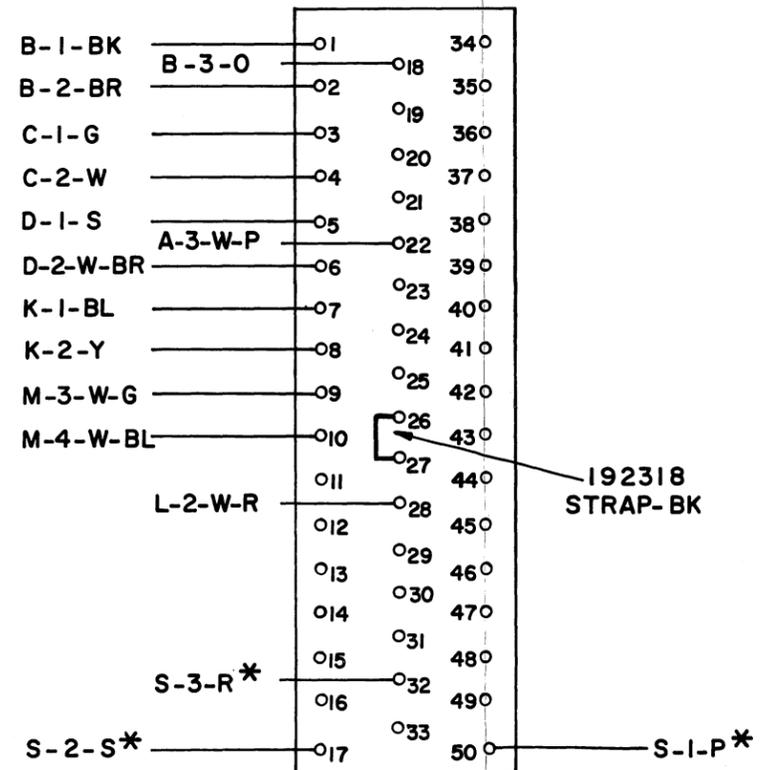

SHEET 1 OF 2

ACTUAL WIRING  
DIAGRAM  
FOR MODEL 35  
KEYBOARD  
LAK804 & LAK811

APPROVALS

D AND R E OF M

E-NUMBER

PROD. NO. 6479WD

DATE: 3-7-64

P.D. FILE NO. 1-18.151AA

DRAWN JAP CHKD. JGM

ENG. WEC APPD. BGG

TELETYPE  
CORPORATION


SEE SHEET 1 FOR NOTES

6479 WD


REVISIONS

ISSUE	DATE	AUTH. NO.
2	10-8-64	83710
3	10-30-64	83869
4	1-22-65	85864
5	2-15-65	83740
6	6-24-65	87329


**G**  
BACKSPACE MAGNET  
(ON REPERFORATOR)

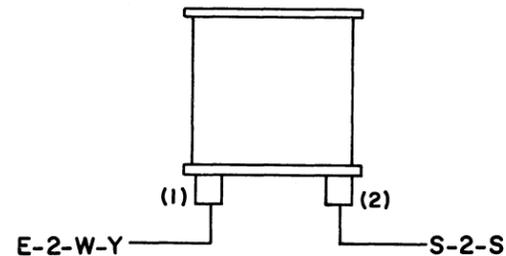


**K**  
END OF LINE  
INDICATOR SWITCH

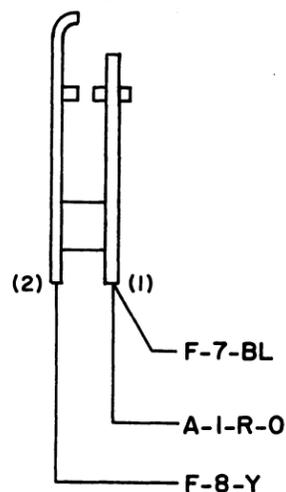


**L**  
CHARACTER COUNTER  
SUPPRESS COIL

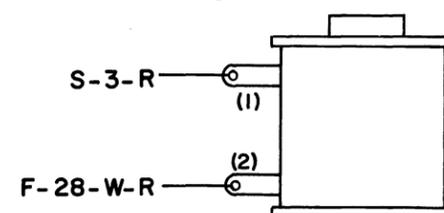

**M**  
REPERFORATOR SELECTOR  
MAGNETS

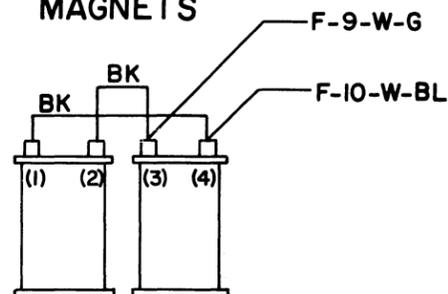

**S**  
MOTOR TERMINAL  
BLOCK  
151415

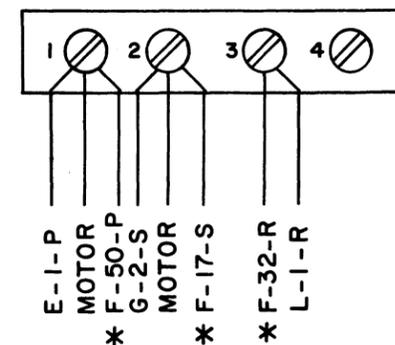

SHEET 2 OF 2

ACTUAL WIRING  
DIAGRAM  
FOR MODEL 35  
KEYBOARD  
LAK 804 & LAK 811

APPROVALS

D AND R E OF M  
*[Signatures]*

E-NUMBER

PROD. NO. 6479WD

DATE: 3-7-64

P.D. FILE NO. 1-18.151AA

DRAWN JAP CHKD. JGM

ENGD. WEC APPD. BGG

TELETYPE  
CORPORATION

6 6479 WD

ISSUE CONTROL RECORD

7930 WD

NO.

NOTES

SUPPORTING INFORMATION

CONTENTS

SHEET NO.

ISSUE

REVISIONS APPLYING TO THIS CONTROL RECORD

CATEGORY NO.

1  
2

2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

ISSUE	DATE	AUTH. NO.
1	10-13-66	17805-R
2	4-13-67	93156
3	5-17-67	93362-1

1	X	X																
2	X																	

ISSUE CONTROL SHEET 1 OF 1

ACTUAL WIRING DIAGRAM FOR MODEL 35KEYBOARD LAK 816


WD NUMBER 7930  
 DRAWN DDG CHKD. TDC  
 ENGD. RLW APPD. RRS

TELETYPE CORPORATION


3 7930 WD

- NO. NOTES**
- 1. WIRING LEGEND:**  
  
 A-1-BK  
 WIRE COLOR CODE
  - 2. WIRE COLOR CODE:**  
 BK - BLACK      R - RED  
 BR - BROWN     G - GREEN  
 BL - BLUE       Y - YELLOW  
 W - WHITE       P - PURPLE  
 O - ORANGE      S - SLATE
  - 3. CONNECTOR VIEWED FROM WIRING SIDE.**
  - 4. \* ASTERISK DENOTES 18 GA. WIRE**
  - 5. ASSOCIATED CABLE:**  
 315810 CABLE ASSEMBLY
  - 6. NUMBERS IN PARENTHESES ARE NOT MARKED ON COMPONENTS.**
  - 7.**
  - 8. ASSOCIATED SCHEMATIC:**  
 7994 WD  
 8008 WD
  - 9. ALL CONTACTS SHOWN IN UNOPERATED POSITION.**
  - 10. 319946 OR 324010 TIMING CONTACT USED IN CONJUNCTION WITH A SIGNAL REGENERATOR ASSEMBLY 305445 OR 305446 OPTIONAL.**


**A**  
**MARGIN INDICATOR SWITCH**  
 155954




**C**  
**TIMING CONTACT**  
 319946 OR 324010  
 (NOTE 10)

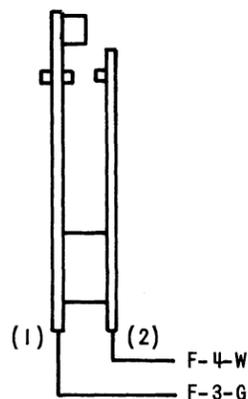


**D**  
**KEYBOARD**  
**UNIVERSAL CONTACT**  
 178144

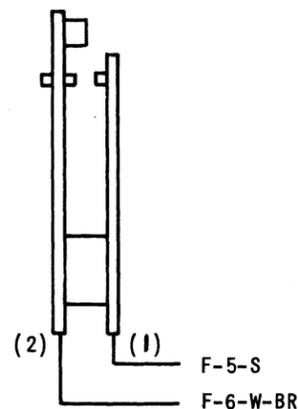

**B**  
**CONTACT**  
**BOX ASSEMBLY**  
 176352

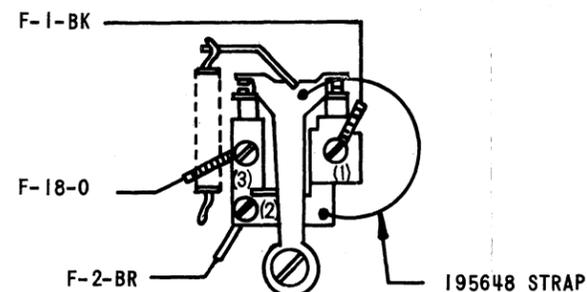

**E**  
**BACKSPACE**  
**CONTACT**  
 170413

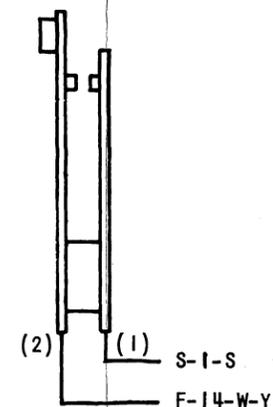

NOTE: REVISION INFORMATION MUST ALSO BE REFLECTED ON THE ISSUE CONTROL RECORD, WHICH IS A PART OF THIS DRAWING.

7930 WD		
REVISIONS		
ISSUE	DATE	AUTH. NO.
1	10-13-66	17805-R
2	4-13-67	93156
3	5-17-67	93362-1

SEE ISSUE CONTROL RECORD FOR COMPLETE LIST OF SHEETS COMPRISING THIS W.D.

SHEET 1

ACTUAL WIRING DIAGRAM  
 FOR MODEL 35  
 KEYBOARD  
 LAK816

**APPROVALS**

D AND R      E OF M

E-NUMBER

PROD. NO. 7930WD

DATE: 12-13-65

P.D. FILE NO. 1-A151.A116

DRAWN D.D.G.      CHKD. *TDL*


ENGD. R.L.W.      APPD. *RRS*

**TELETYPE**  
 CORPORATION


7930 WD

SEE SHEET 1 FOR NOTES.


**F**  
KEYBOARD CONNECTOR  
192013

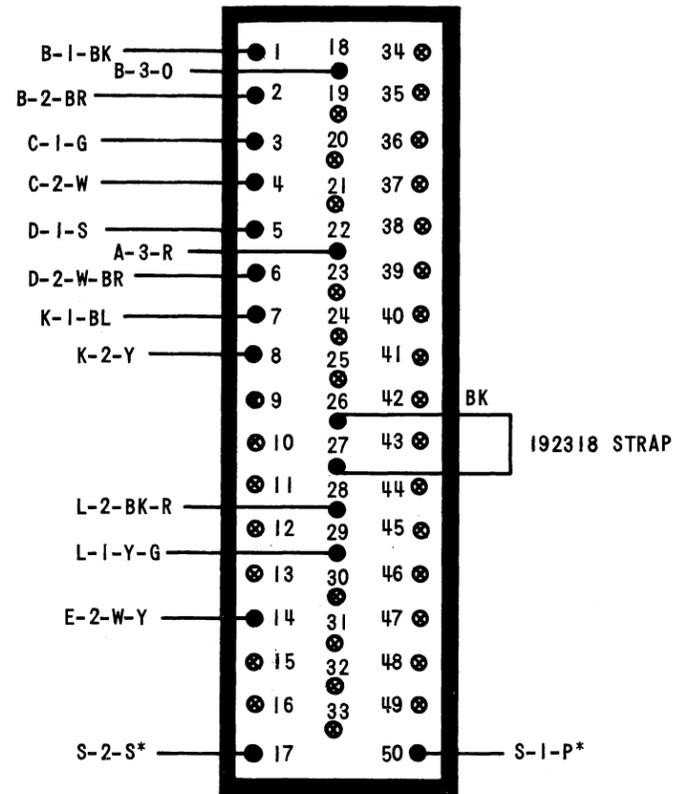


**L**  
CHARACTER COUNTER  
SUPPRESS MAGNET  
198269

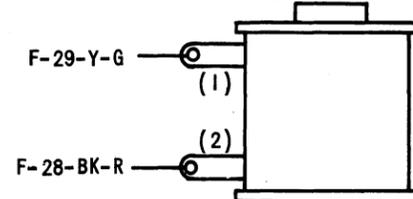

**K**  
END-OF-LINE  
INDICATOR SWITCH  
158050

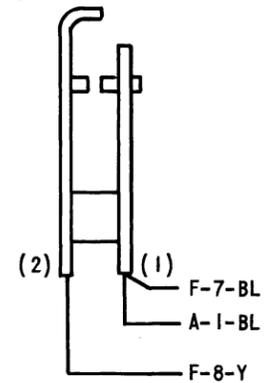

**S**  
MOTOR TERMINAL BLOCK  
151415

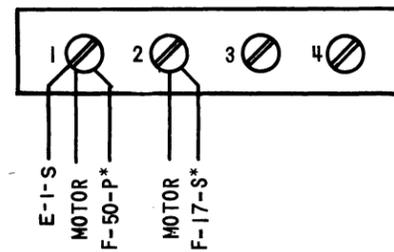

NOTE: REVISION INFORMATION MUST ALSO BE REFLECTED ON THE ISSUE CONTROL RECORD, WHICH IS A PART OF THIS DRAWING.

7930 WD		
REVISIONS		
ISSUE	DATE	AUTH. NO.
1	10-13-66	17805-R
2	4-13-67	93156

SEE ISSUE CONTROL RECORD FOR COMPLETE LIST OF SHEETS COMPRISING THIS W.D.

SHEET 2

ACTUAL WIRING DIAGRAM  
FOR MODEL 35  
KEYBOARD  
LAK816

APPROVALS

D AND R E OF M  
*HJK* *cr*

E-NUMBER  
PROD. NO. 7930WD

DATE: 12-13-65

P.D. FILE NO. I-A151.A116

DRAWN. D.D.G. CHKD. *TDR*  
ENGD. R.L.W. APPD. *RRS*

TELETYPE CORPORATION






7930 WD

8147 WD




REVISIONS

ISSUE	DATE	AUTH. NO.
1	11-2-67	18232-R
2	2-9-68	97229
3	2-12-68	95117

- NOTES
- WIRING LEGEND:  
 DISTANT TERMINATING AREA.  
 DISTANT TERMINAL DESIGNATION.  
 WIRE COLOR CODE.  
 A-1-BK [OO-A] ← SEE NOTE 7
  - CONNECTOR VIEWED FROM WIRING SIDE.
  - \* ASTERISK DENOTES 18 AWG. WIRE.
  - ASSOCIATED CABLE:  
 323073 CABLE ASSEMBLY.
  - TERMINAL DESIGNATIONS ENCLOSED IN PARENTHESES ARE FOR REFERENCE AND ARE NOT MARKED ON COMPONENT.
  - ⊗ INDICATES TERMINAL NOT REQUIRED.
  - WIRING STATUS:  
 RECTANGULAR BOX INDICATES HISTORY OF WIRING CHANGES  
 [OO-B] B-DENOTES WIRING BEFORE THE CHANGE DESCRIBED BY THE DESIGNATED NOTE NUMBER ENTERED THE PRODUCT.  
 [OO-A] A-DENOTES WIRING AFTER THE CHANGE DESCRIBED BY THE DESIGNATED NOTE ENTERED THE PRODUCT.
  - WIRING REROUTED TO FACILITATE ASSEMBLY

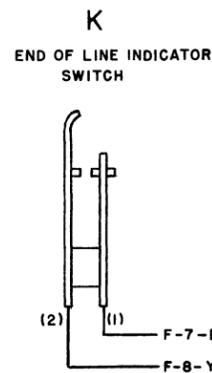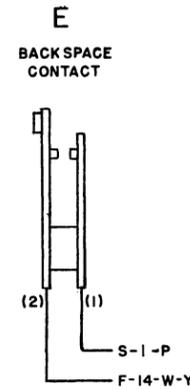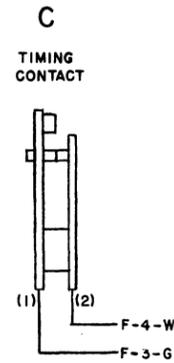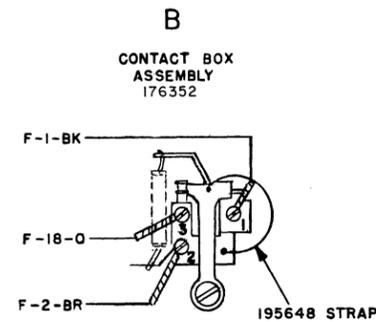

**F**  
KEYBOARD PLUG  
192013

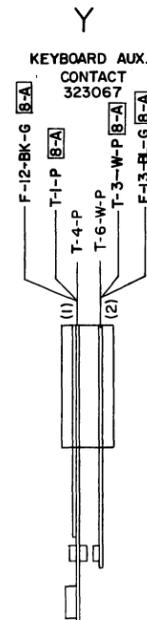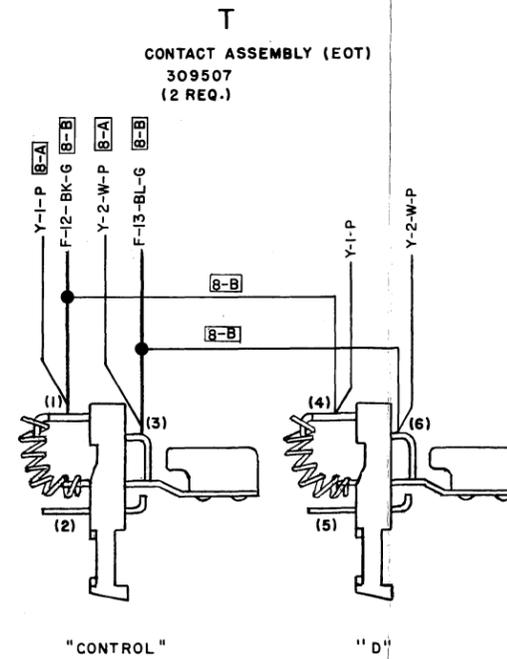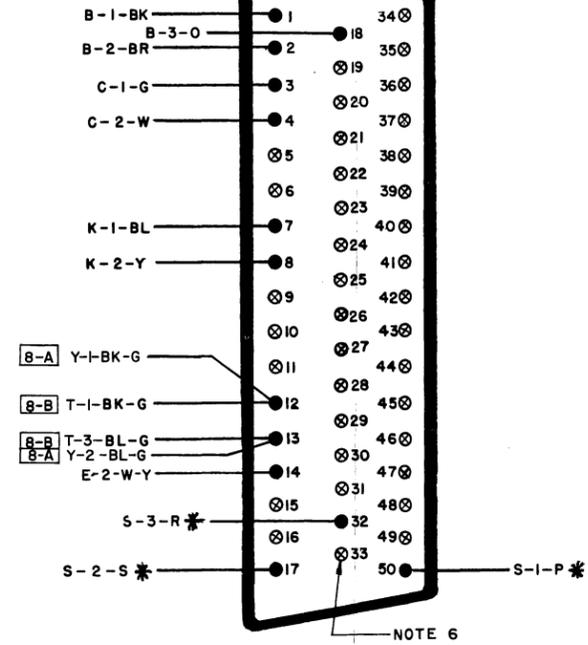

WIRING DIAGRAM FOR M 35 KEYBOARD LAK 817

APPROVALS

D AND R *[Signature]* E OF M *[Signature]*

E-NUMBER 143706

PROD. NO. 8147 WD

DATE 8-26-65

P.D. FILE NO. 4-A151/116AA

DRAWN A.D.

CHKD. *[Signature]*

ENGD. J.E.G.

APPD. *[Signature]*

TELETYPE CORPORATION

8147 WD

WDP

ISSUE CONTROL RECORD

8409 WD

NO.

NOTES

SUPPORTING INFORMATION

CONTENTS

SHEET NO.

ISSUE

REVISIONS APPLYING TO THIS CONTROL RECORD

2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

ISSUE DATE AUTH. NO.

1. SEE SHEET 1 OF THE WD FOR NOTES

CATEGORY NO.

AREAS A, B, C, D, E  
AREAS F, K, L, T, SA

1  
2

1 12-20-67 18578-R

WDP

ISSUE CONTROL SHEET 1 OF 1

ACTUAL WIRING DIAGRAM FOR MODEL 35 KEYBOARD LAK819

WD NUMBER 8409WD  
DRAWN CHKD. TDL  
ENGD. DAK APPD. KRS

TELETYPE CORPORATION

8409 WD

8409 WD

REVISIONS

ISSUE	DATE	AUTH. NO.
1	12-20-67	18578-R

NOTE: REVISION INFORMATION MUST ALSO BE REFLECTED ON THE ISSUE CONTROL RECORD, WHICH IS A PART OF THIS DRAWING.

SEE ISSUE CONTROL RECORD FOR COMPLETE LIST OF SHEETS COMPRISING THIS W.D.

SHEET 1 WDP

ACTUAL WIRING DIAGRAM FOR MODEL 35 KEYBOARD LAK819

APPROVALS

D AND R <i>[Signature]</i>	EOPM <i>[Signature]</i>
-------------------------------	----------------------------

E-NUMBER  
PROD. NO. 8409 WD


DATE: 4-15-67  
P.D. FILE 4 A151/116.219A  
DRAWN. *D.* CHKD. *TRC*  
ENGD. DAK APPD. *RRS*

TELETYPE CORPORATION


8409 WD

- | NO.        | NOTES   |            |         |            |           |           |            |           |            |            |           |
|------------|---|------------|---------|------------|-----------|-----------|------------|-----------|------------|------------|-----------|
| 1.         | <p>WIRING LEGEND:</p>   |            |         |            |           |           |            |           |            |            |           |
| 2.         | <p>WIRE COLOR CODE:</p> <table border="0"> <tr> <td>BK - BLACK</td> <td>R - RED</td> </tr> <tr> <td>BR - BROWN</td> <td>G - GREEN</td> </tr> <tr> <td>BL - BLUE</td> <td>Y - YELLOW</td> </tr> <tr> <td>W - WHITE</td> <td>P - PURPLE</td> </tr> <tr> <td>O - ORANGE</td> <td>S - SLATE</td> </tr> </table> | BK - BLACK | R - RED | BR - BROWN | G - GREEN | BL - BLUE | Y - YELLOW | W - WHITE | P - PURPLE | O - ORANGE | S - SLATE |
| BK - BLACK | R - RED   |            |         |            |           |           |            |           |            |            |           |
| BR - BROWN | G - GREEN   |            |         |            |           |           |            |           |            |            |           |
| BL - BLUE  | Y - YELLOW  |            |         |            |           |           |            |           |            |            |           |
| W - WHITE  | P - PURPLE  |            |         |            |           |           |            |           |            |            |           |
| O - ORANGE | S - SLATE   |            |         |            |           |           |            |           |            |            |           |
| 3.         | CONNECTOR VIEWED FROM WIRING SIDE.  |            |         |            |           |           |            |           |            |            |           |
| 4.         | * ASTERISK DEMOTES 18 GA. WIRE  |            |         |            |           |           |            |           |            |            |           |
| 5.         | ASSOCIATED CABLE:<br>198439 CABLE ASSEMBLY<br>315810 CABLE ASSEMBLY   |            |         |            |           |           |            |           |            |            |           |
| 6.         | NUMBERS IN PARENTHESES ARE NOT MARKED ON COMPONENTS.  |            |         |            |           |           |            |           |            |            |           |
| 7.         |   |            |         |            |           |           |            |           |            |            |           |
| 8.         | ASSOCIATED SCHEMATIC:<br>8410 WD  |            |         |            |           |           |            |           |            |            |           |
| 9.         | ALL CONTACTS SHOWN IN UNOPERATED POSITION.  |            |         |            |           |           |            |           |            |            |           |
| 10.        | 319946 TIMING CONTACT USED IN CONJUNCTION WITH THE DISTRIBUTOR TO SERIALIZE THE KEYBOARD SIGNAL   |            |         |            |           |           |            |           |            |            |           |


**A**  
MARGIN INDICATOR SWITCH  
155954




**B**  
CONTACT BOX ASSEMBLY  
176352

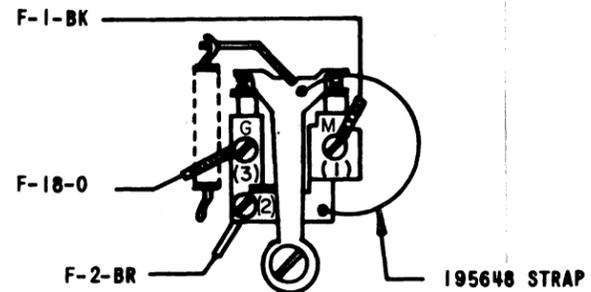


**C**  
TIMING CONTACT  
319946  
(NOTE 10)

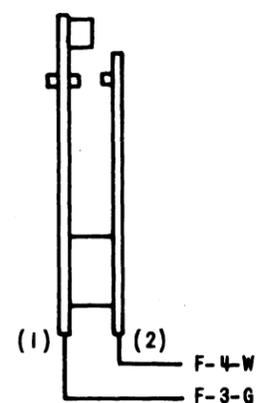

**D**  
KEYBOARD  
UNIVERSAL CONTACT  
178144

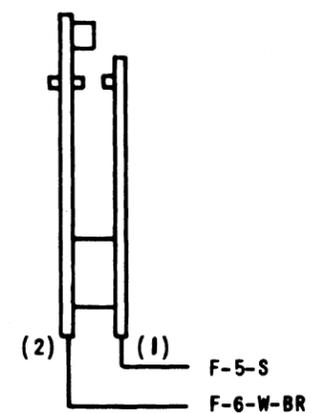


**E**  
BACKSPACE  
CONTACT  
170413

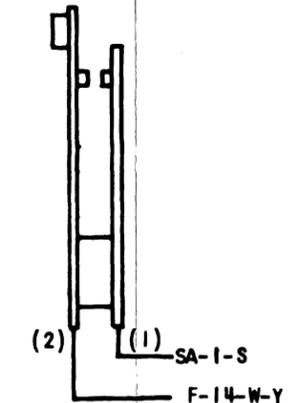


SEE SHEET 1 FOR NOTES.


### F KEYBOARD CONNECTOR 192013

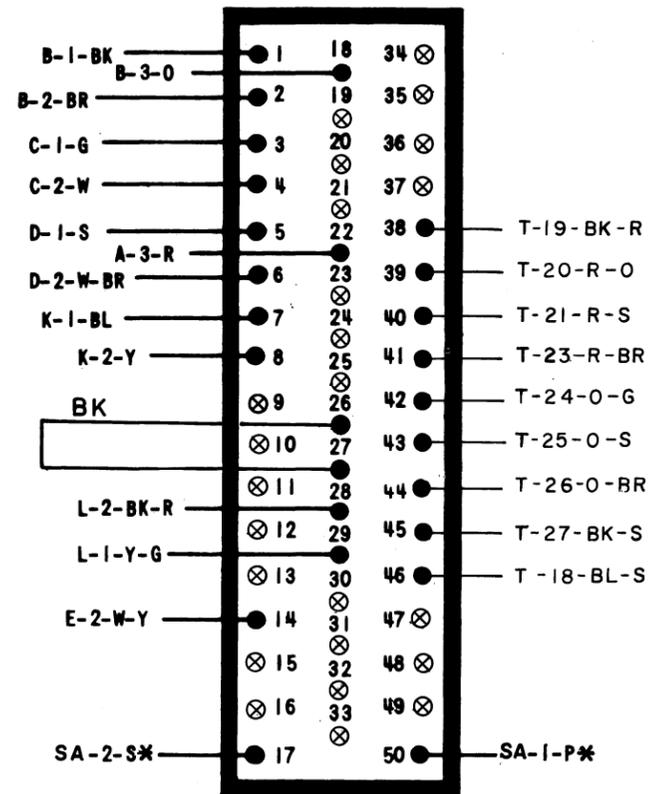


### K END-OF-LINE INDICATOR SWITCH 158050

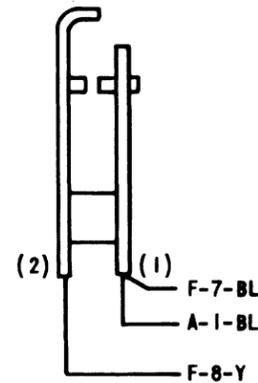


### L CHARACTER COUNTER SUPPRESS MAGNET 198272

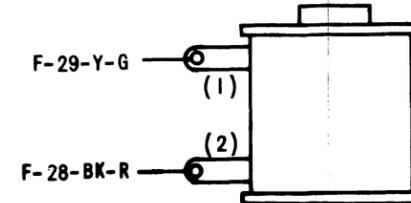

### T MULTIPLE WIRE OUTPUT CONTACTS

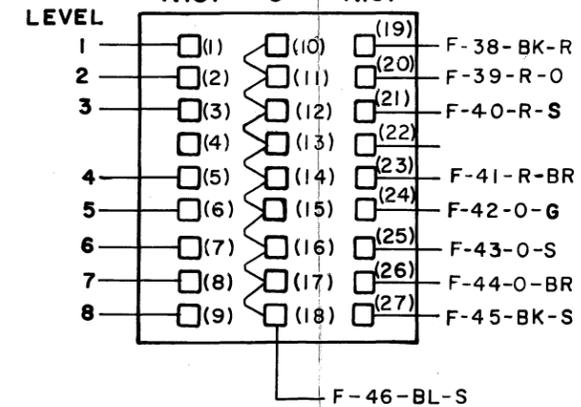

### SA MOTOR TERMINAL BLOCK 151415

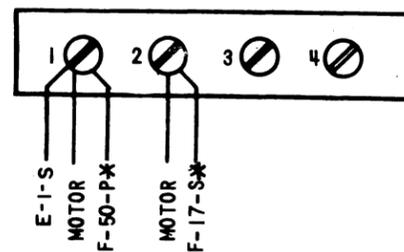

NOTE: REVISION INFORMATION MUST ALSO BE REFLECTED ON THE ISSUE CONTROL RECORD, WHICH IS A PART OF THIS DRAWING.

8409 WD

#### REVISIONS

ISSUE	DATE	AUTH. NO.
1	12-20-67	18578-R

SEE ISSUE CONTROL RECORD FOR COMPLETE LIST OF SHEETS COMPRISING THIS W.D.

SHEET 2

WDP

ACTUAL WIRING DIAGRAM  
FOR MODEL 35  
KEYBOARD  
LAK 819

#### APPROVALS

D AND R E OF M

*HJK* *ci*

E-NUMBER

PROD. NO. 8409 WD

DATE: 4-15-67

P.D. FILE 4A151/116.219A

DRAWN. *P.* CHKD. *Tol*

ENGD. DAK APPD. *ZRS*

TELETYPE CORPORATION

8409 WD