


TELEPHONE SETS
701D
CONNECTIONS

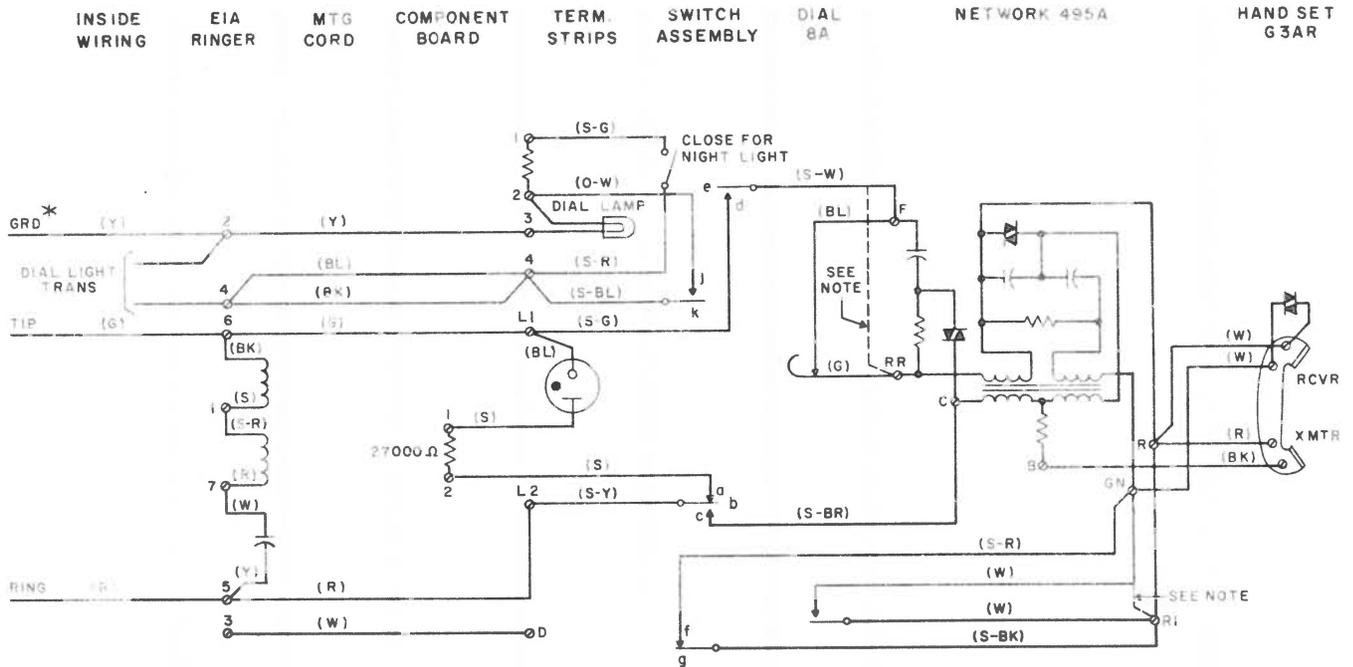

Note: Dotted line indicates connection for manual service. Dial remains on the set.

* Ground may be omitted; not required for protection of dial-light transformer.

Fig. 1 – Connections for 701D Telephone Set

TABLE A
LINE AND RINGER CONNECTIONS

Wire or Lead	Individual or Bridge	Ring Party	Tip Party
Line at Ringer	Ring B	5	5
	Tip G	6	6
	Grid Y	2	2
Ringer	BL	7	7
	S-BL	1	1
	BK	6	2
	S	1	1
Capacitor in Ringer	W	7	7
	Y	5	6
Transformer Leads at Ringer	F	2	2
	Z	4	4
Mounting Cord at Ringer	R	5	6
	G	6	5
	Y	2	2
	BL	4	4
Mounting Cord at Set	W	3	3
	BK	4	4
	W	7	7
	BK	1	1
Message-Waiting Lamp Leads	S	1	1
	BL	1	1

† Except tip parties requiring identifying ground.

‡ Terminal on component board.