


TELEPHONE SETS

322 TYPE—CONNECTIONS

I. GENERAL

1.01 This section covers the connections for the D-94616, D-94617, 322A and 322C type telephone sets.

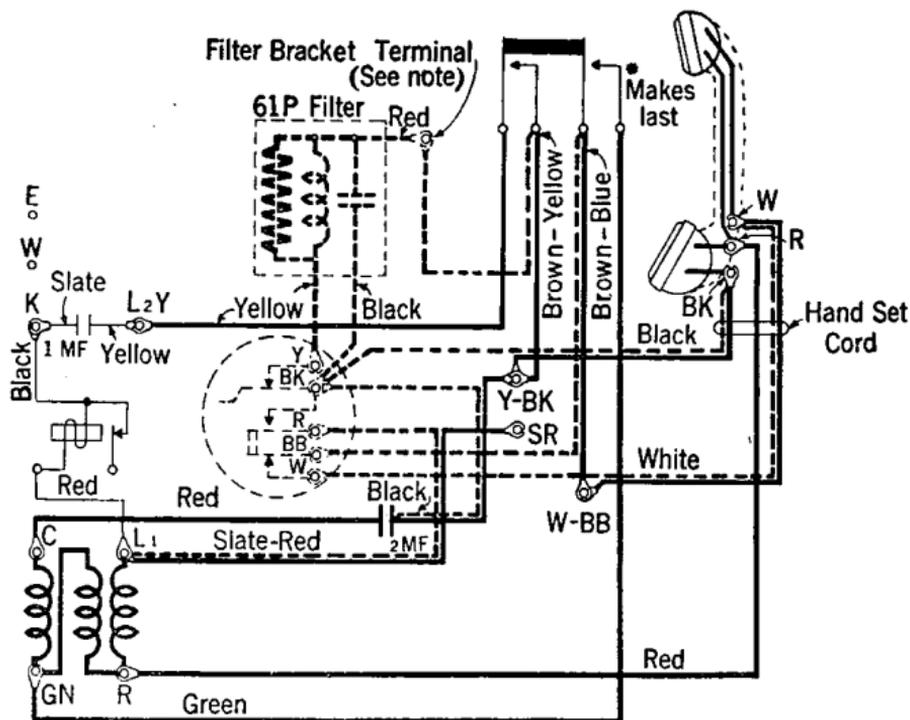

Note . . . If filter is not provided connect brown-yellow lead from switch contacts to Y of dial instead of to filter bracket terminal. Terminals Y-BK, SR and W-BB are on the manual 322 A set apparatus blank and terminals Y-BK and W-BB are on the manual D-94616 and D-94617 set apparatus blank.

Fig. 1—322 Type Telephone Set—Connections

1.02 D-94616 and D-94617 telephone sets are connected the same as in Fig. 1 except that for manual service the cord tip at the dial end of the slate-red lead is enclosed in tape.

1.03 For information on the ringing bridge in these sets and the use of additional ringing bridges refer to Section C55.301.