



Asus VivoBook E203MA-TBCL432B Power Button Replacement

How to replace the power button of the Asus VivoBook E203MA-TBCL432B.

Written By: Jacob Aubertine



INTRODUCTION

If you have followed a troubleshooting guide and determined that the power button on your Asus VivoBook E203MA-TBCL432B is broken, this guide will help you replace it. For this replacement guide, all you will need is a Phillips #0 screwdriver and a plastic opening tool to remove the back panel.

TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Back Panel



- Position the laptop so that the bottom panel is facing upwards, the hinge is away from you, and the ASUS logo is against the table.

ⓘ It will be easier to replace the battery if the laptop is closed.

Step 2



- Use a Phillips #0 screwdriver to remove the eight 5 mm screws on the back panel.
- Remove the two 7 mm Phillips #0 screws.

ⓘ The 8 screws marked in red are all of the same length, 5 mm, and should not be interchanged with the two longer 7 mm screws marked in orange.

Step 3



- Insert the iFixit opening tool in between the back panel and the rest of the laptop.
- With the iFixit opening tool, lift the panel from the laptop body. Work your way around the device creating separation with the tool.
- Once there is enough separation between the back panel and the device, gently pull off the back panel with your hands and completely remove it.

(i) Make sure to use a plastic tool, not a metal one, so that you don't scratch the panel.


Step 4 — Power Button



- Remove the single connector by first pulling back the white tab and then pulling the connector out with the blue tab.


This document was generated on 2020-01-21 04:05:53 PM (MST).

Step 5

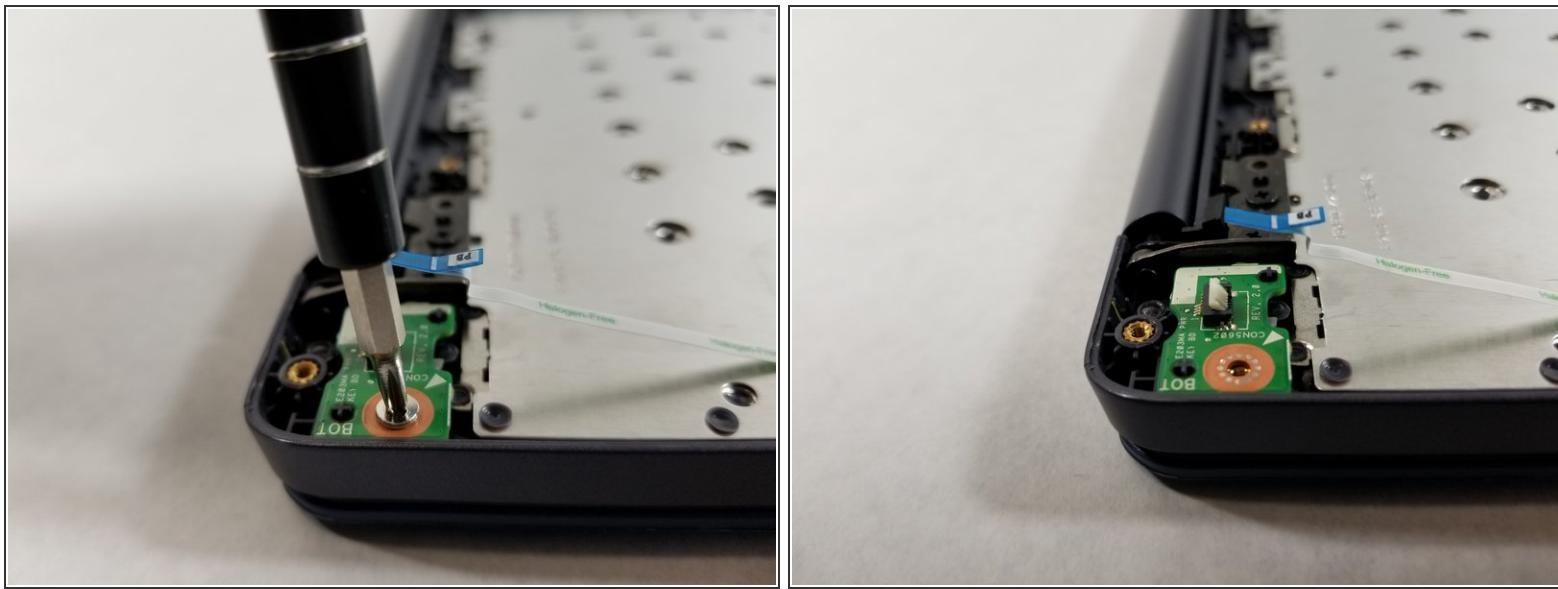

- Remove the single 2 mm screw with a Phillips #0 screwdriver.

Step 6

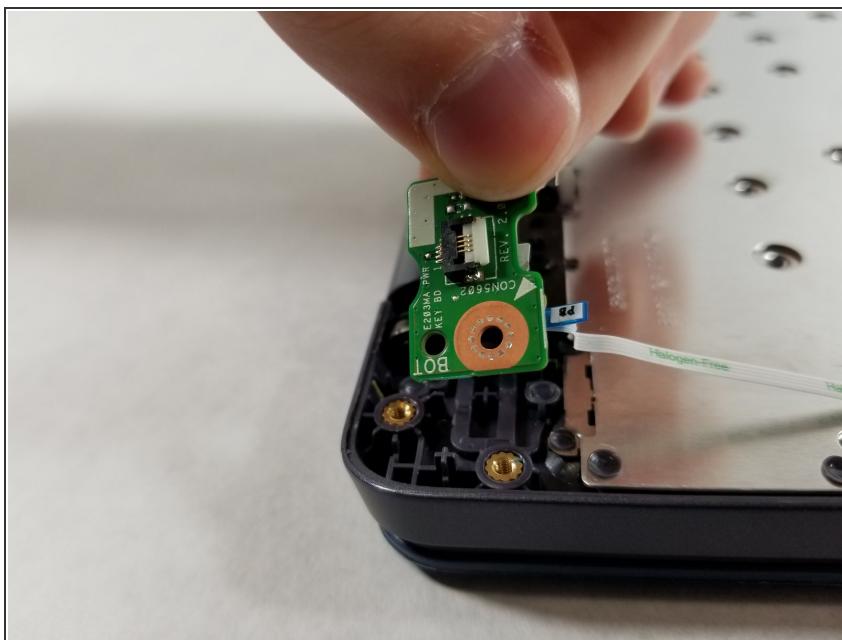

- Now that the power button component is free, lift it up and out of the laptop.

To reassemble your device, follow these instructions in reverse order.