





# BIOS battery replacement by why! W253EU

Replace BIOS battery (BIOS is the software that allows you to load the operating system from your computer).

Written By: Felice Suglia

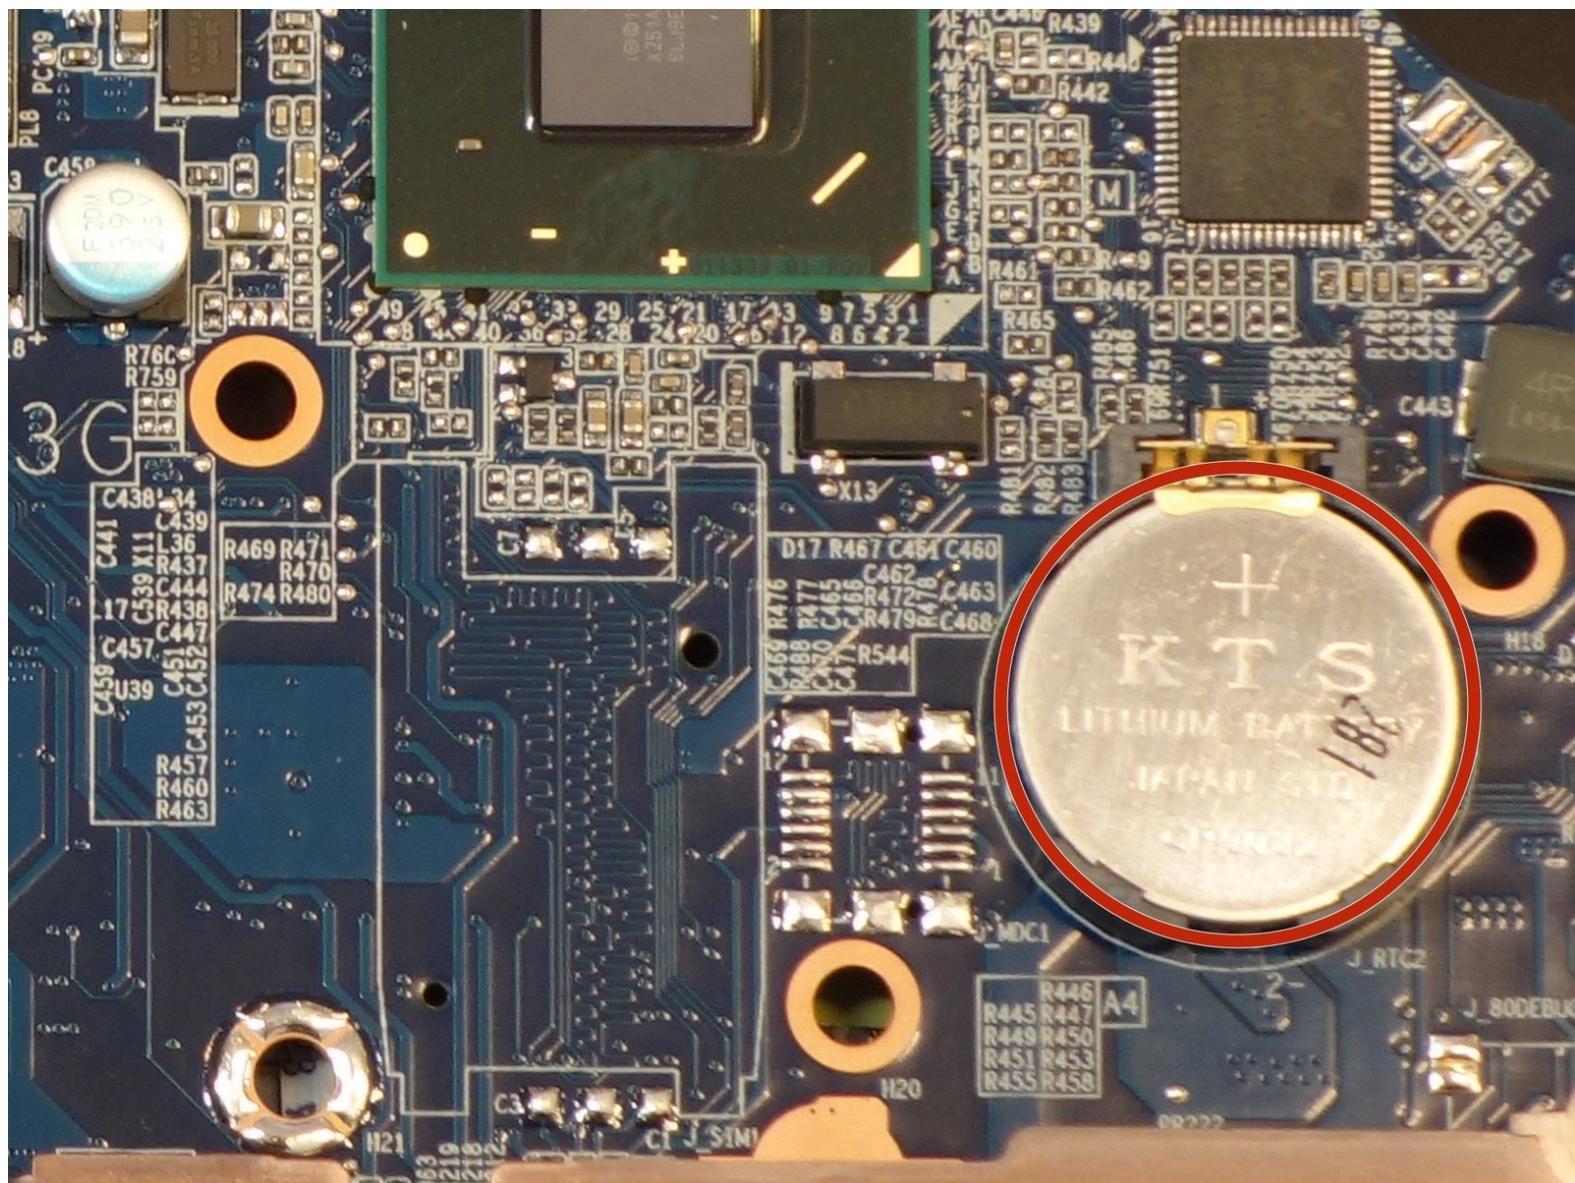


## Step 1 — Battery from why! Remove W253EU

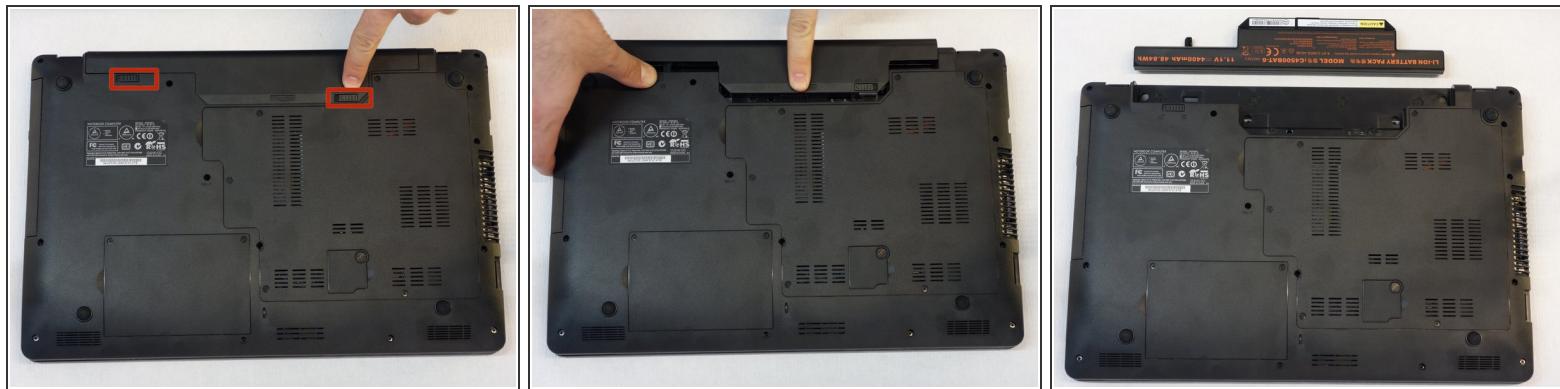


- Turn off the computer.
- Before each operation it is important to start with the removal of the accumulator.
- Take the slide unlocked into position, remove the battery.

## Step 2 — Access to RAM and CPU from why! W253EU (German)

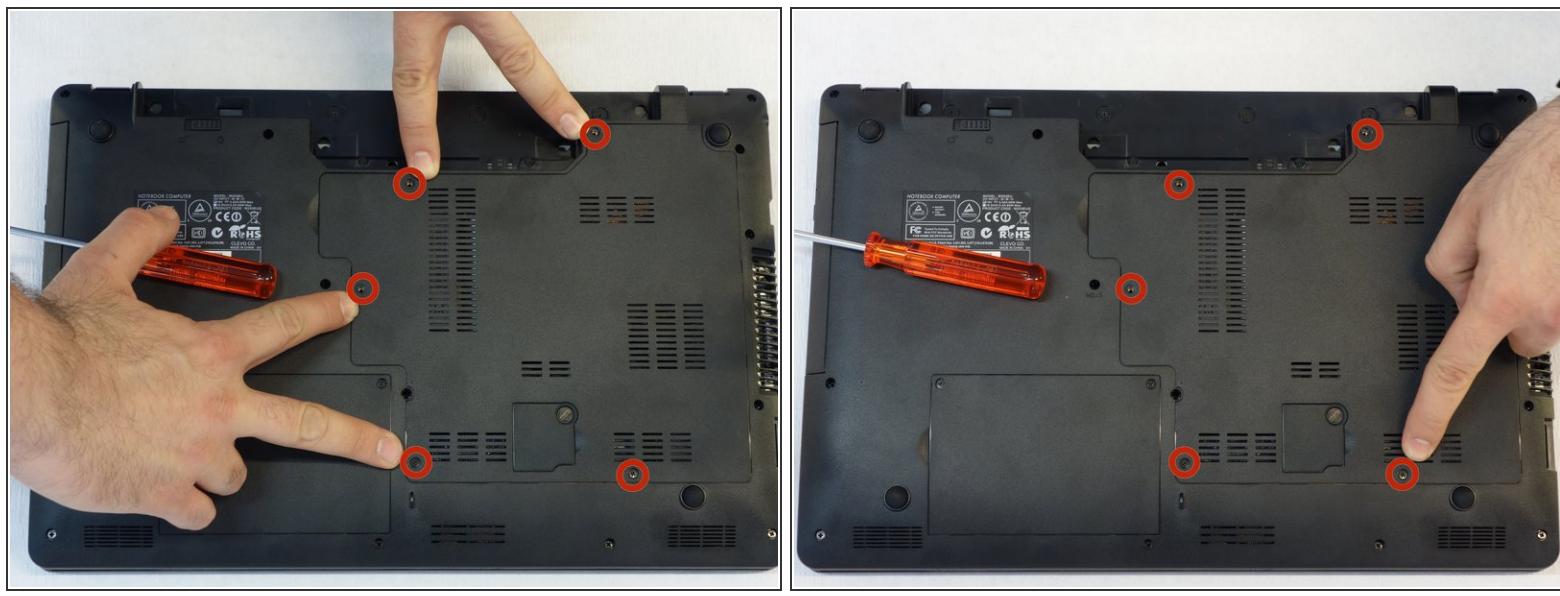


- Using the screwdriver Philips # 1, unscrew the 5 fixing screws of the cover.

## Step 3

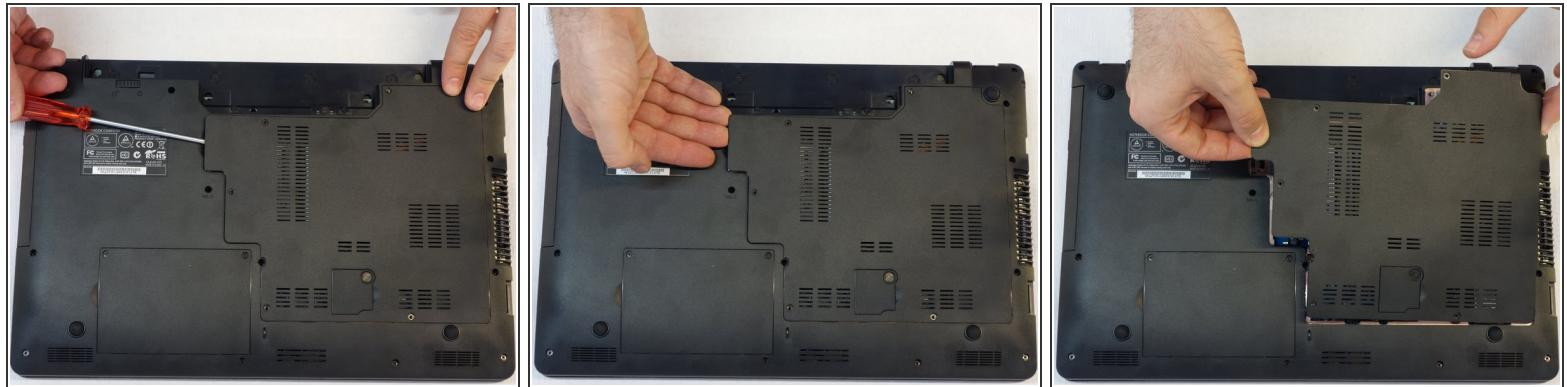


- Push the screwdriver a few millimeters under the cover so that it can be touched with your fingers.
- Now lift the cover carefully.
- Attention! Disconnect the ventilator cable so that the cover can be completely removed (see next step).

## Step 4

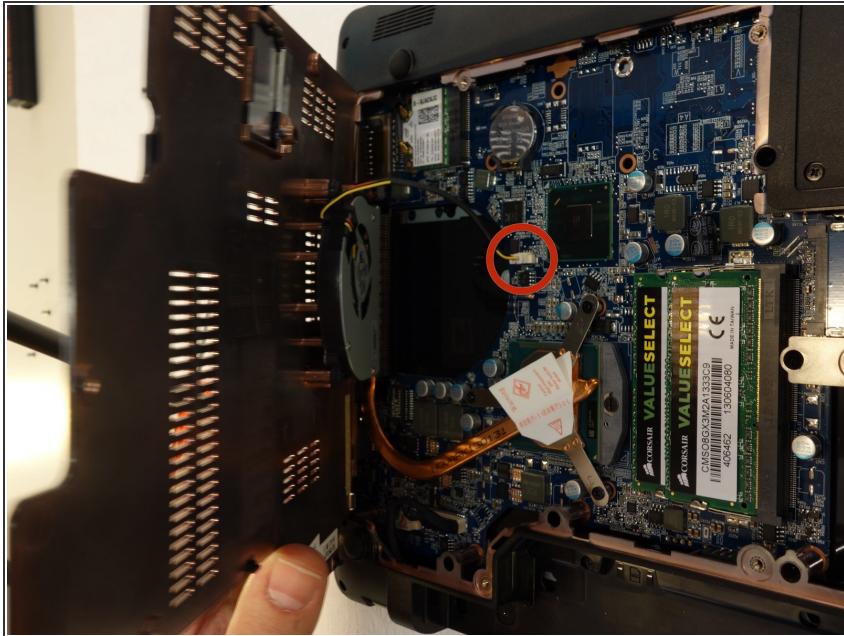

- Since the ventilator is mounted under the cover, its power supply cable must first be disconnected so that the cover can then be completely removed.

## Step 5 — BIOS battery

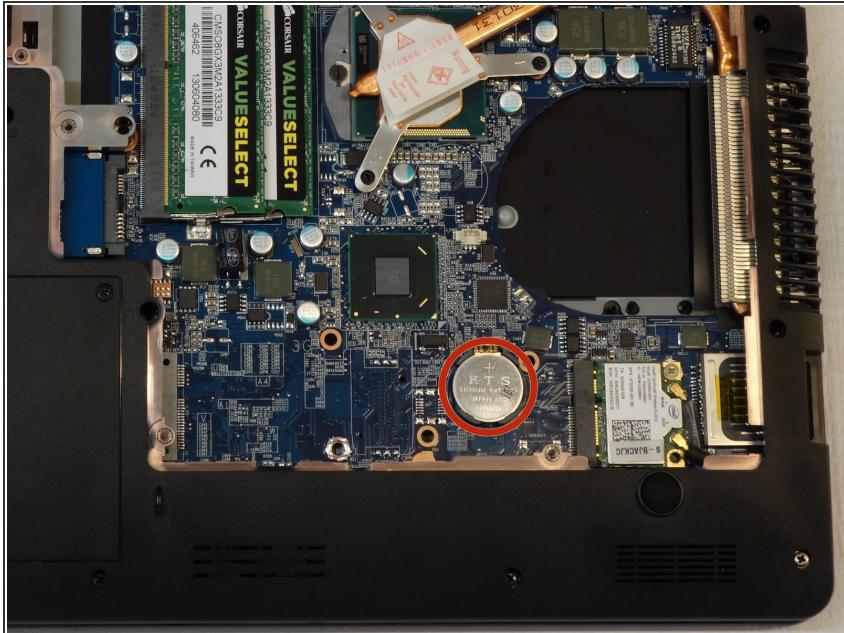

- Carefully remove the BIOS battery from its holder.
- Do not throw away the battery! In Switzerland, the electrical shops are obliged to accept all batteries and accumulators for disposal.

For reassembly, follow the instructions in reverse order.