



Comfort Zone CZ6C Power Cable Replacement

Replace the power cable for your Comfort Zone CZ6C if your power cable is damaged or faulty.

Written By: Nishanth Dara



INTRODUCTION

Learn how to properly replace the power cable of your Comfort Zone CZ6C.

TOOLS:

- Soldering Iron (1)
- Phillips #0 Screwdriver (1)
- Desoldering Braid (1)
- Lightweight Wire Strippers (1)


Step 1 — Power Cable



⚠ Make sure to unplug the Comfort Zone CZ6C before cutting any wires.


- ⓘ Before attempting to replace your power cable, learn how to solder using the [How To Solder and Desolder Corrections Guide](#).
- Start with the fan on its back. Unscrew the back panel to expose the internal wiring.

Step 2

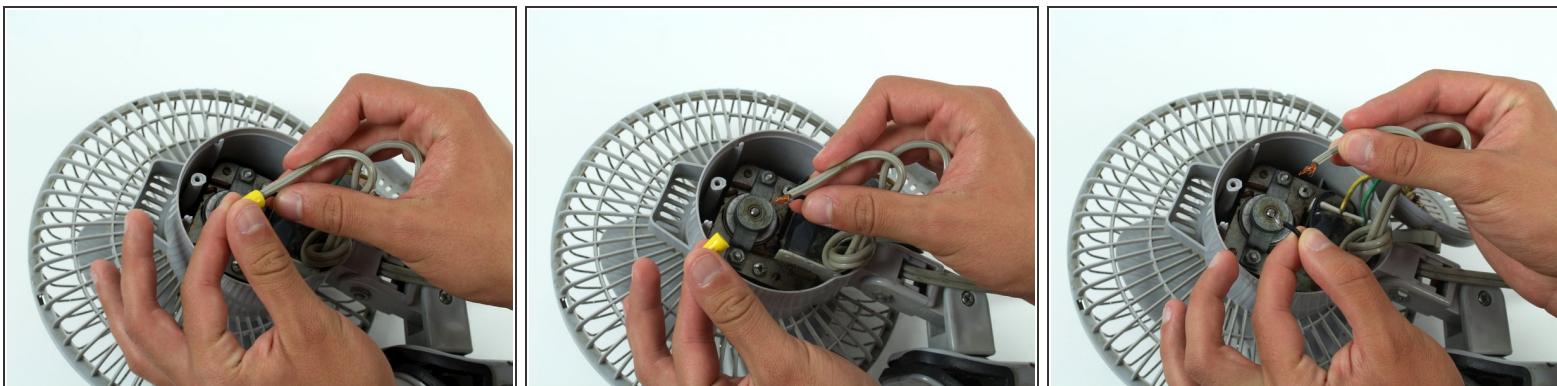


- Unscrew the yellow cap that connects the black wire and the gray power cord wire. Then, unwind the tied wires and pull them apart.

Step 3

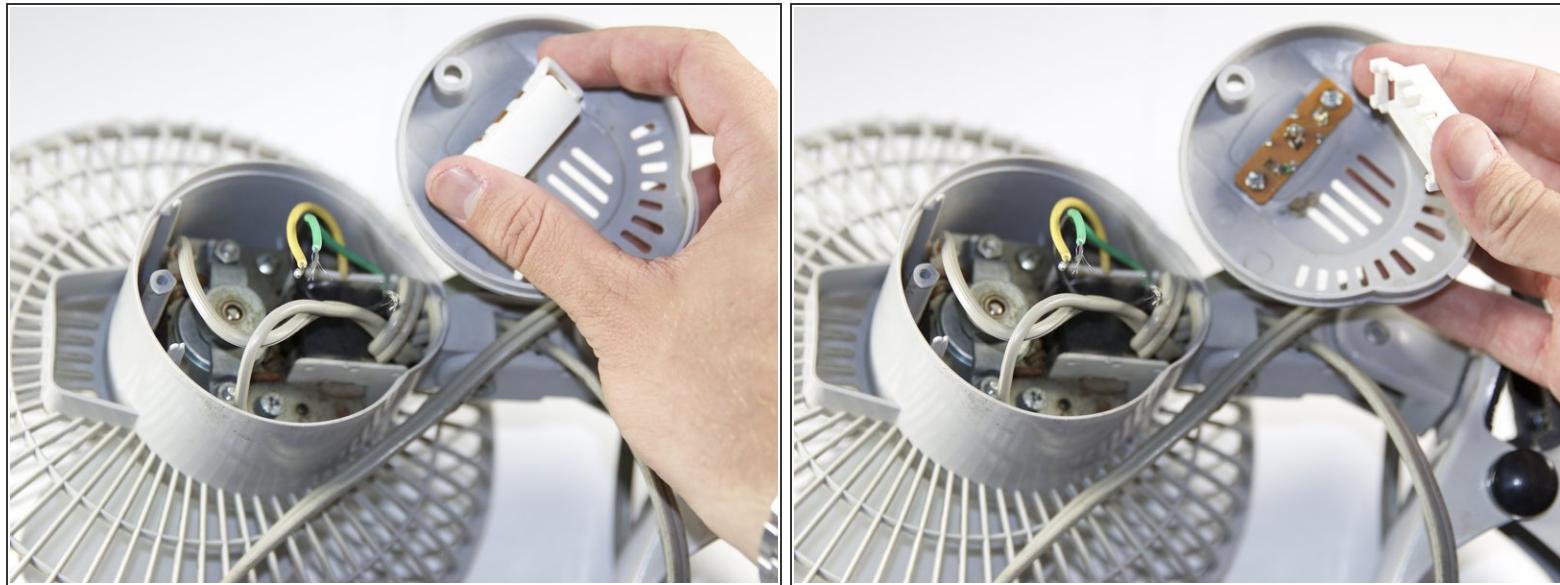

- Remove the plastic cover on the switch by pulling it apart from the back panel.


Step 4

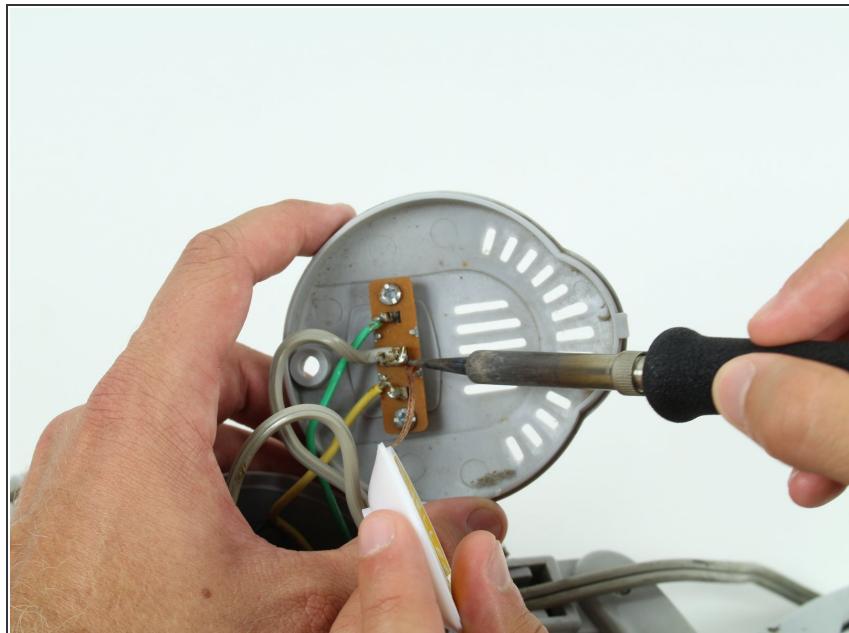

⚠ Use the soldering iron with caution. Don't touch the tip of the soldering iron to avoid the risk of injury.

- i** This step can be made easier with the help of a partner to hold the wiring while you desolder the connection.
- Disconnect the gray power wire from the switch by desoldering the connection.

Step 5

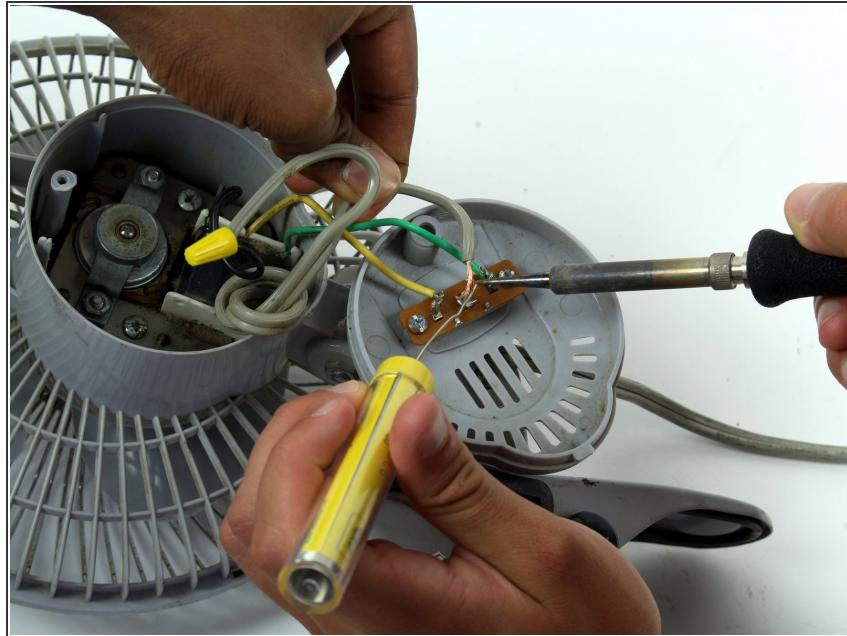

- Strip the end of the gray power cord.
- Then solder the end of the gray power cord to the switch.

To reassemble your device, follow these instructions in reverse order.