




# Dell Alienware 13 Memory Module Replacement

Dell Alienware 13 Memory Module Replacement


Written By: Terrence15

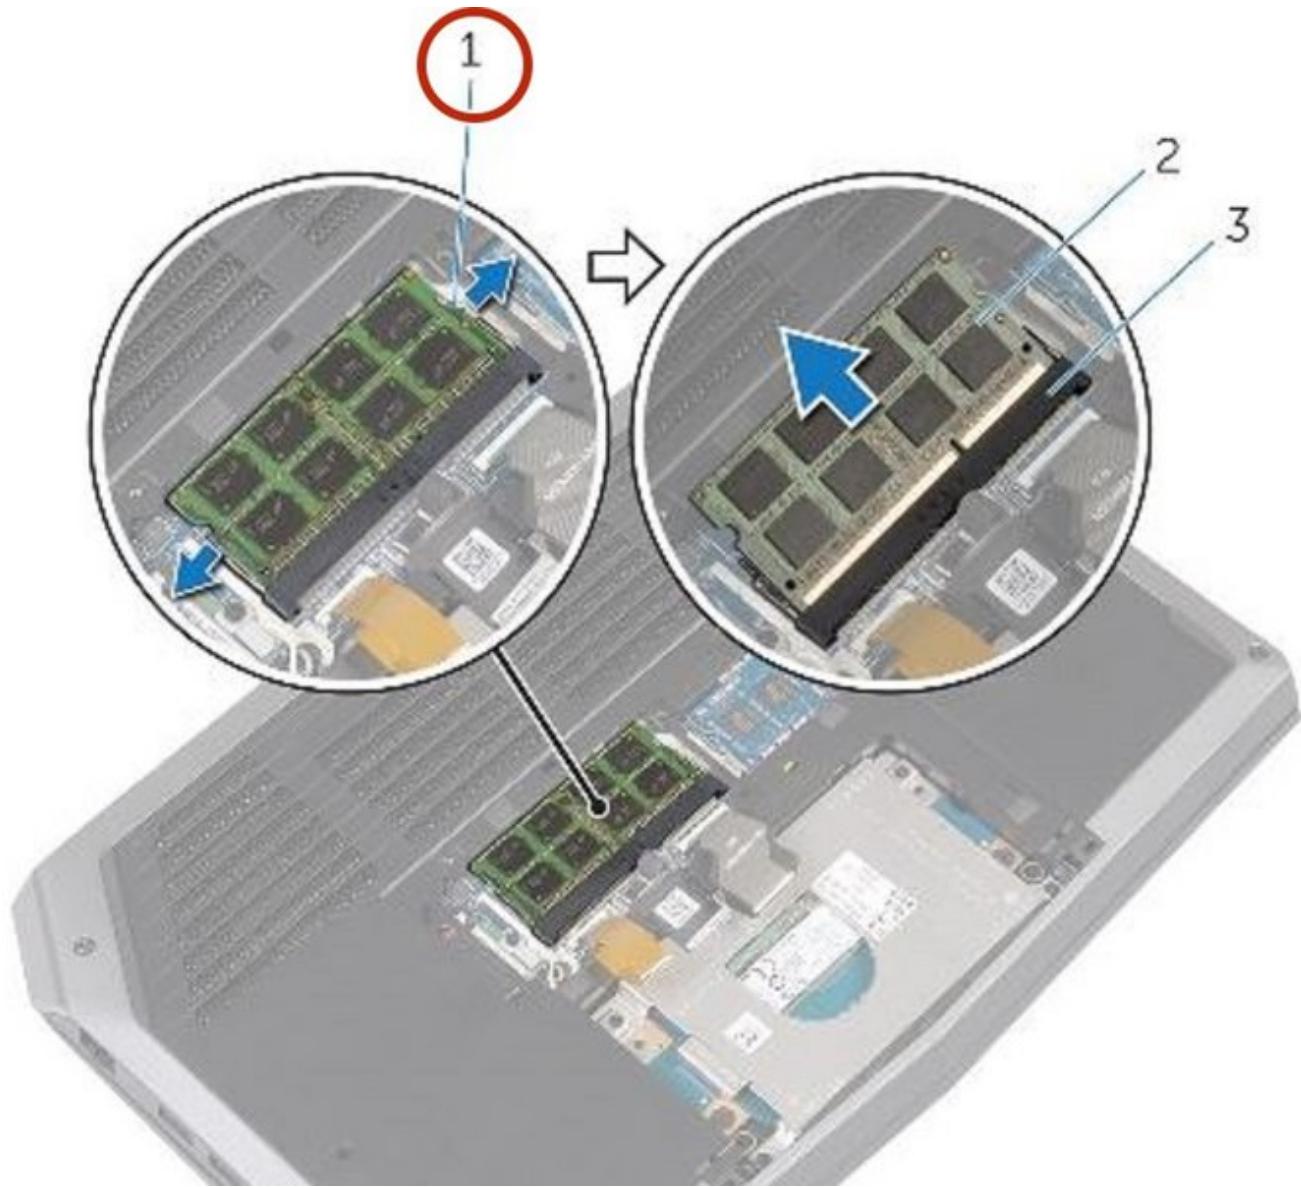

## INTRODUCTION

In this guide, we will be revealing how to remove and replace the memory module of the Dell Alienware 13.


## Step 1 — Popping out the Memory Modules

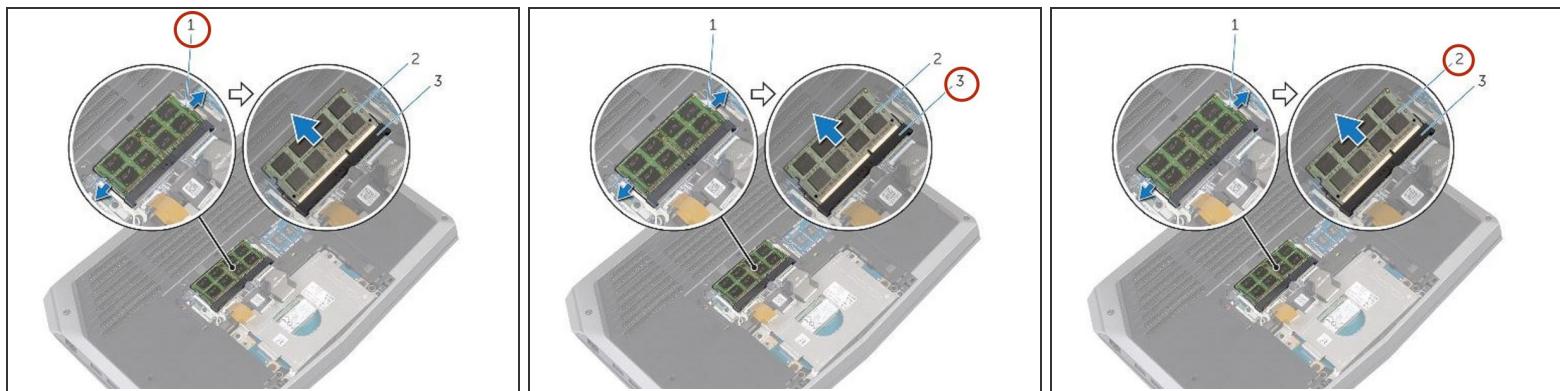

**⚠ WARNING:** Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before Working Inside Your Computer](#). After working inside your computer, follow the instructions in [After Working Inside Your Computer](#).


- Using your fingertips, carefully spread apart the securing clips on each end of the memory-module slot until the memory module pops up.

## Step 2 — Removing the Memory Module

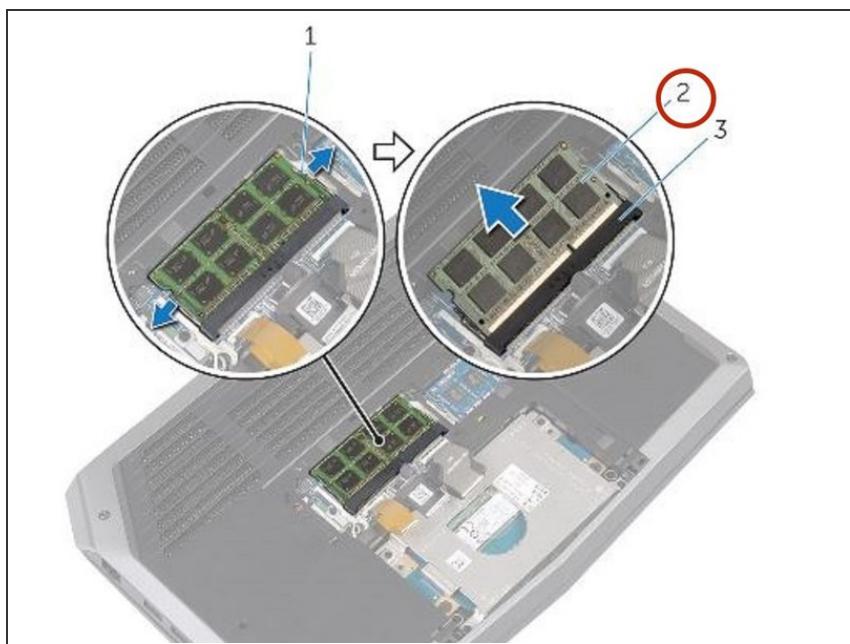

- Slide and remove the memory module from the memory-module slot.

## Step 3 — Aligning the new Memory Module

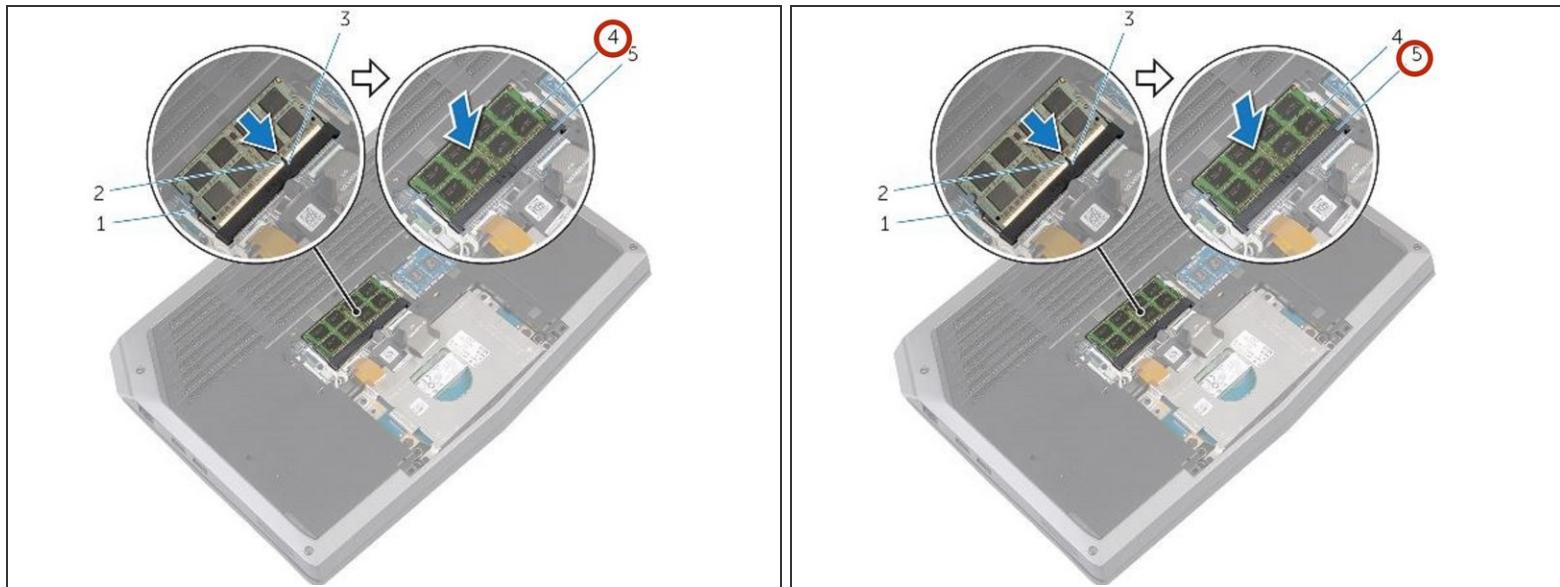

- Align the notch on the **NEW** memory module with the tab on the memory-module slot.

To reassemble your device, follow these instructions in reverse order.