




Dell Inspiron 10z 1120 Hard Drive Replacement

Written By: Terrence15

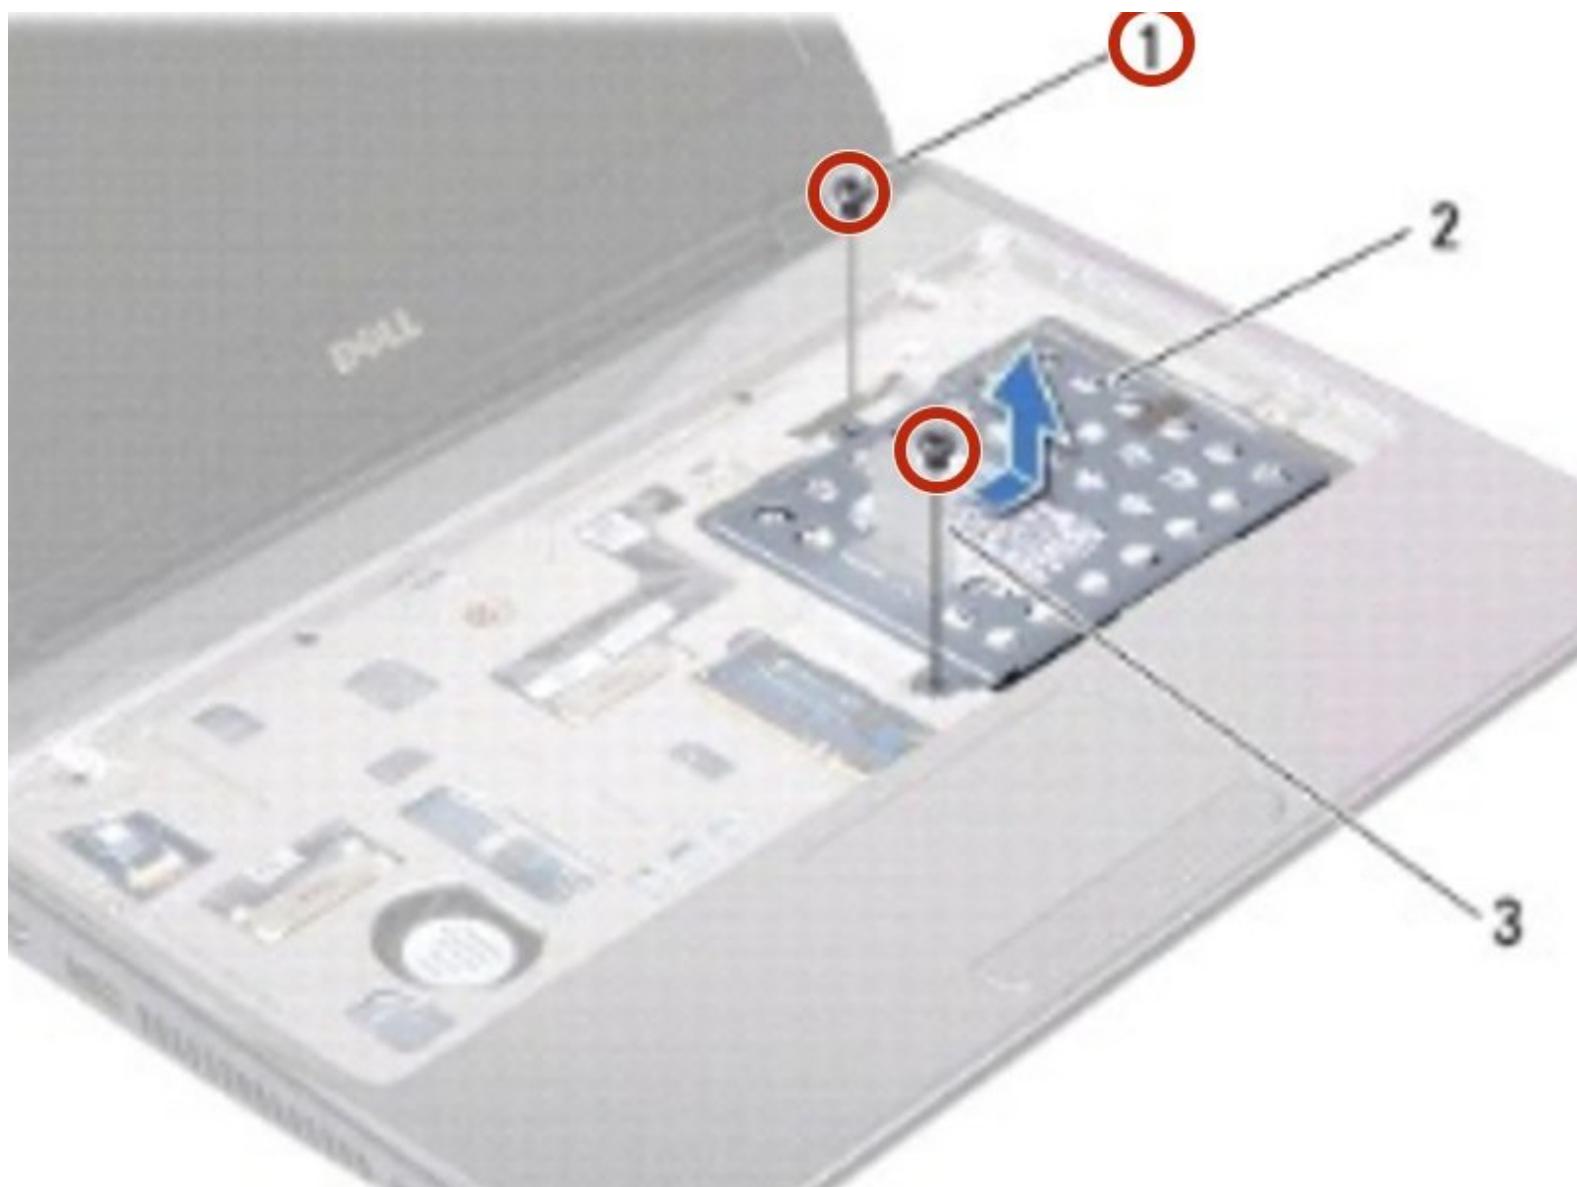


INTRODUCTION

In this guide, we will show you how to remove and replace the Hard Drive.

TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Remove the Screws

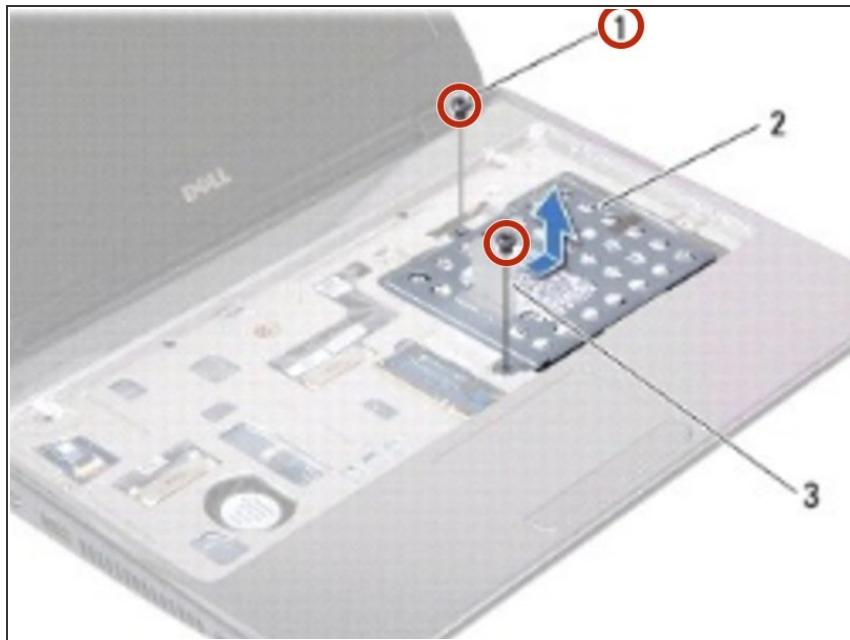


⚠️ **WARNING:** Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in [Before You Begin](#).

⚠️ **CAUTION:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).


- Remove the two screws that secure the hard-drive assembly to the computer base.

Step 2 — Sliding the Hard Drive

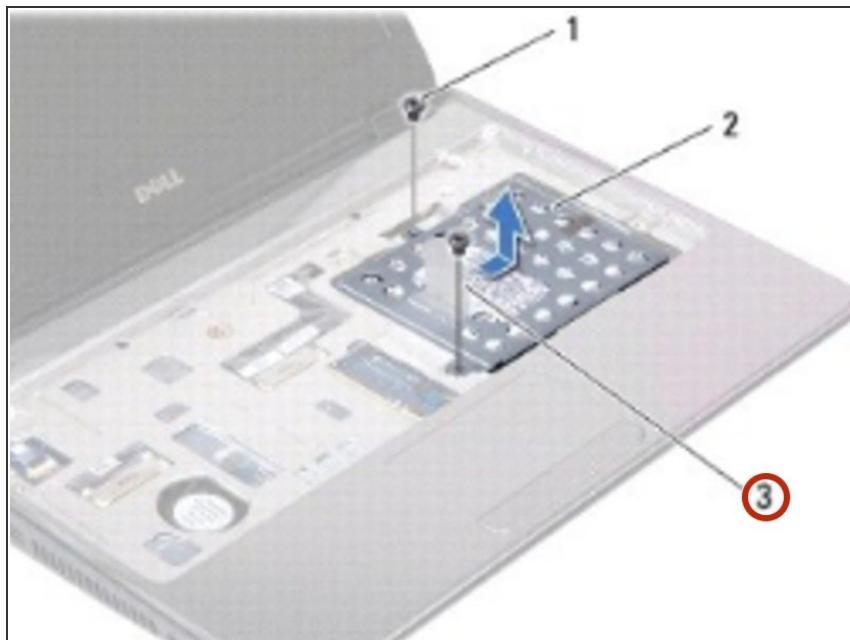


- Using the pull-tab, slide the hard-drive assembly to the side to disconnect it from the connector on the system board.

Step 3 — Lifting the Hard-drive

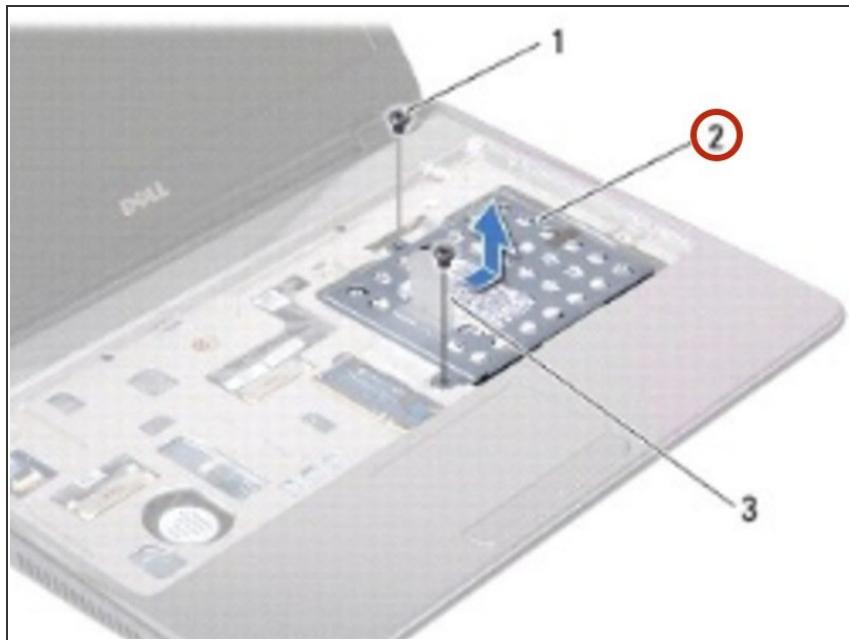


- Lift the hard-drive assembly out of the computer base.

Step 4 — Remove the Screws

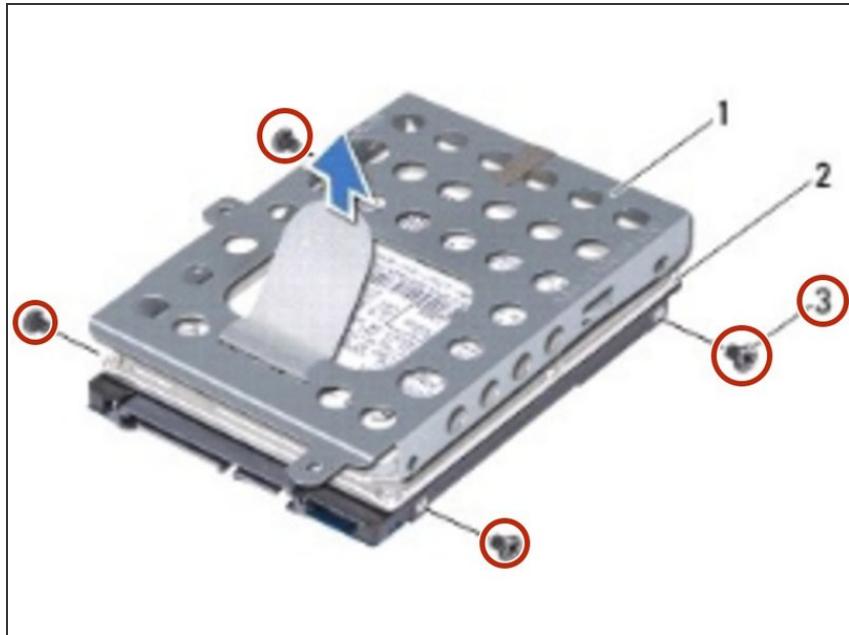

- Remove the four screws that secure the hard-drive bracket to the hard drive.

Step 5 — Lifting the Hard-Drive

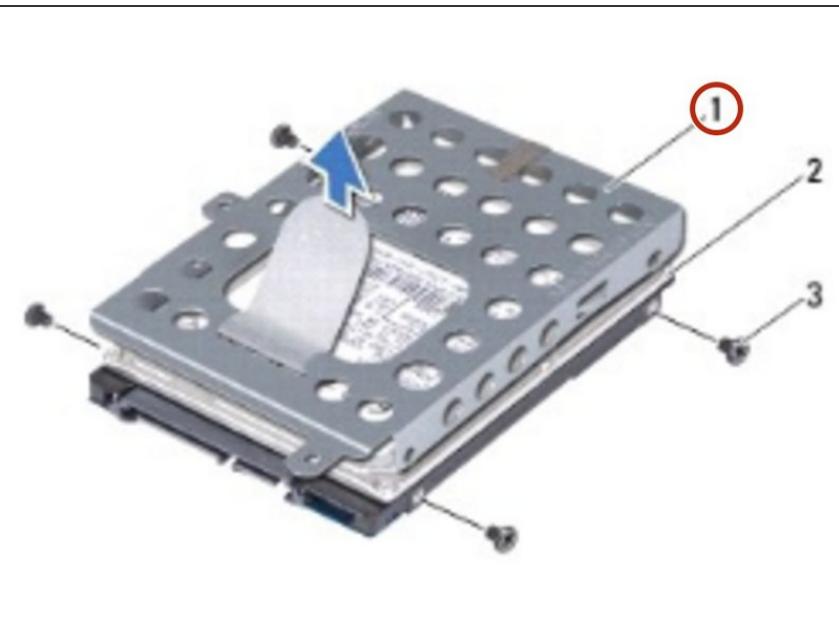

- Lift the hard-drive bracket off the hard drive.

Step 6 — Placing the Hard Drive




- Place the hard drive in the hard-drive bracket.

Step 7 — Replace the Screws




- Replace the four screws that secure the hard-drive bracket to the hard drive.

Step 8 — Placing the Hard Drive

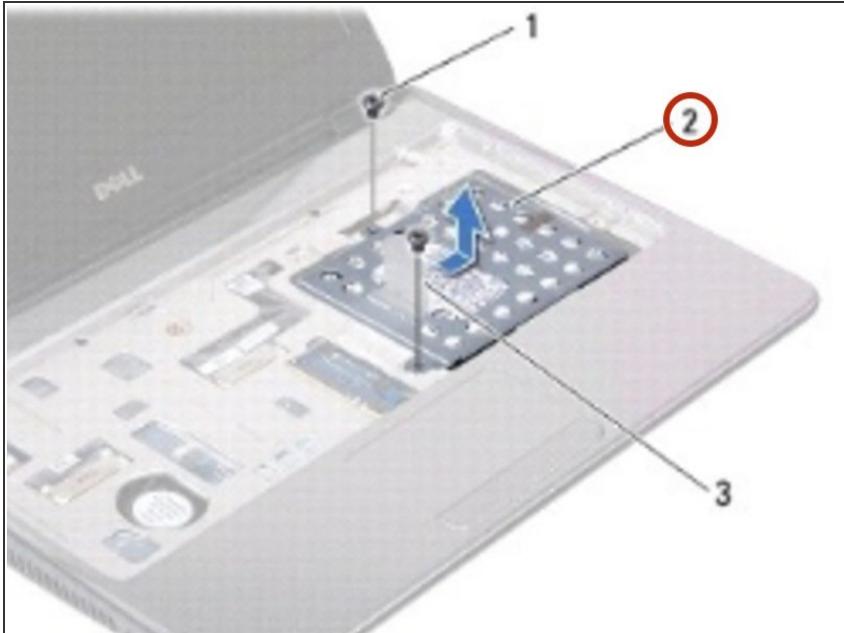

- Place the hard-drive assembly in the computer base.

Step 9 — Replace the Two Screws

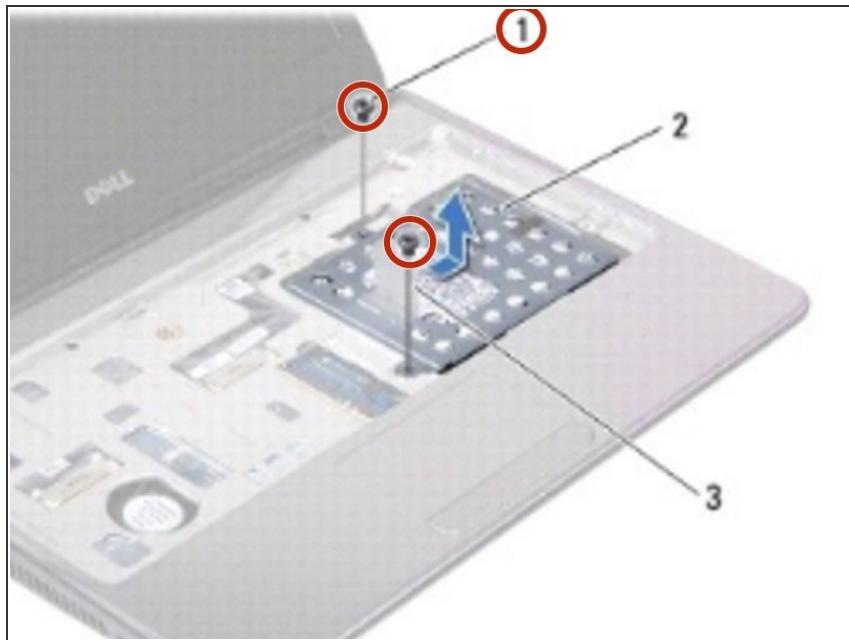

- Replace the two screws that secure the hard-drive assembly to the computer base.

To reassemble your device, follow these instructions in reverse order.