




Dell Inspiron 1210 Memory Module Replacement

Written By: Terrence15

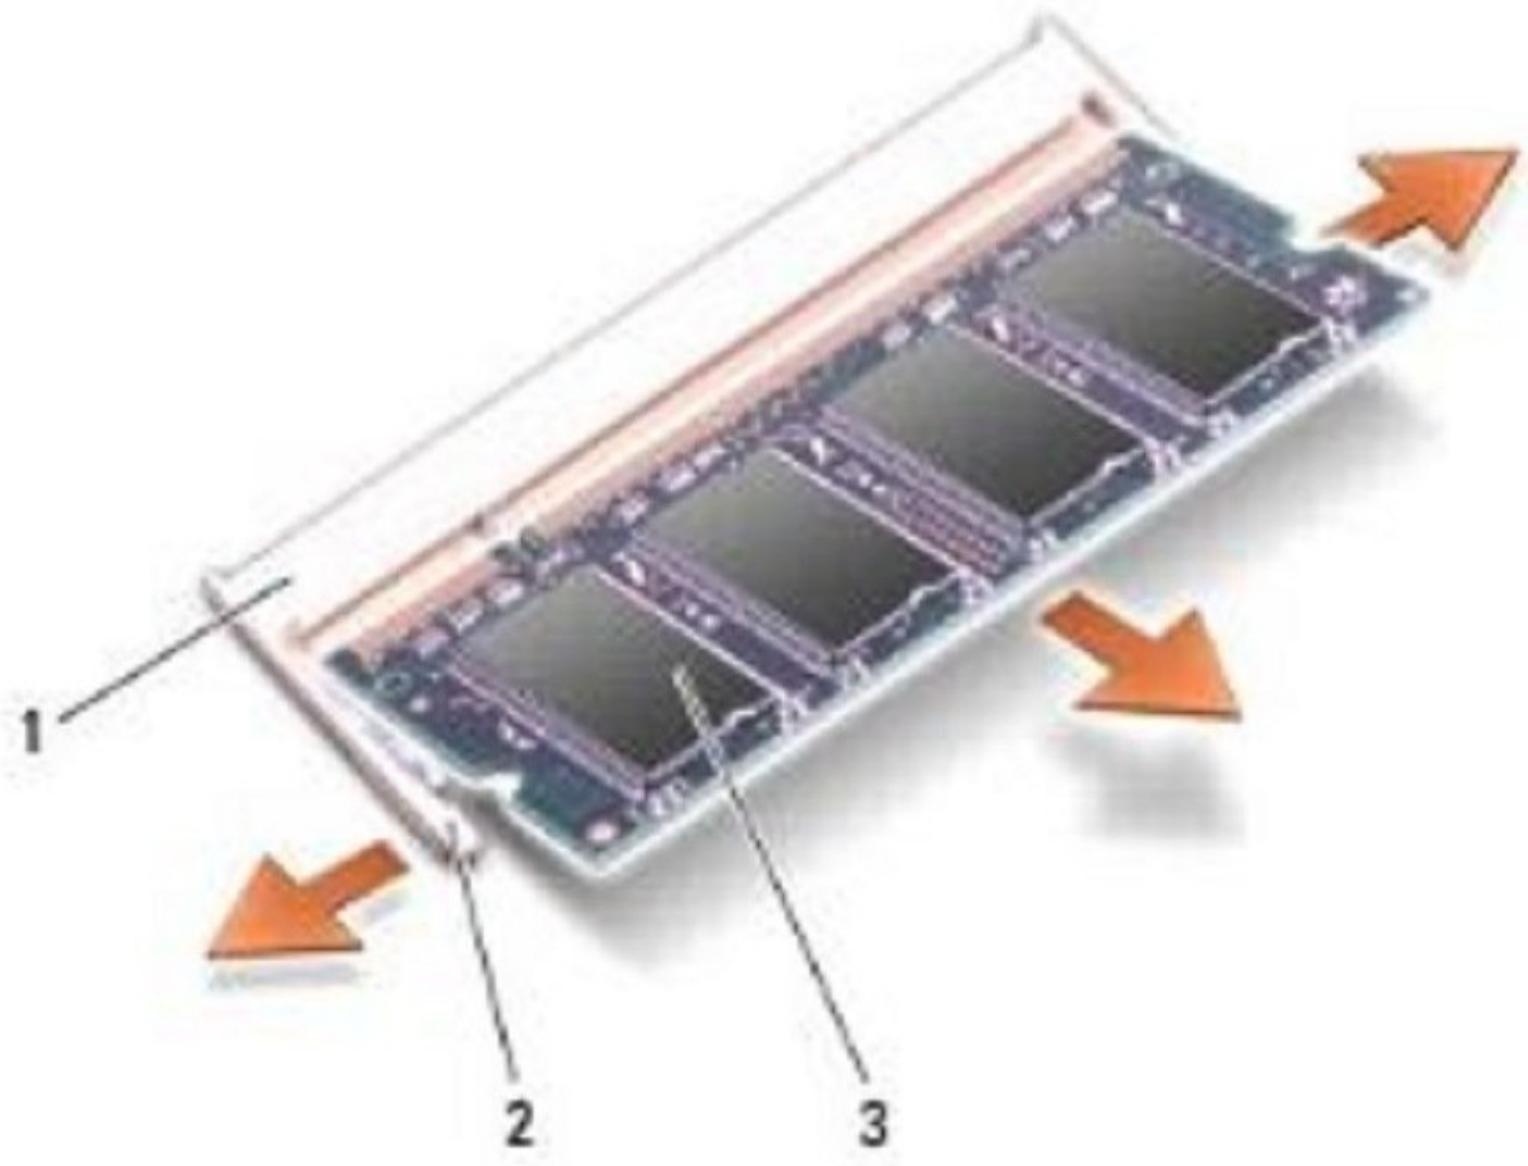


INTRODUCTION

In this guide, we will be showing you how to remove and replace the Hard Drive.

TOOLS:

- Phillips #0 Screwdriver (1)


Step 1 — Removing the Module Cover

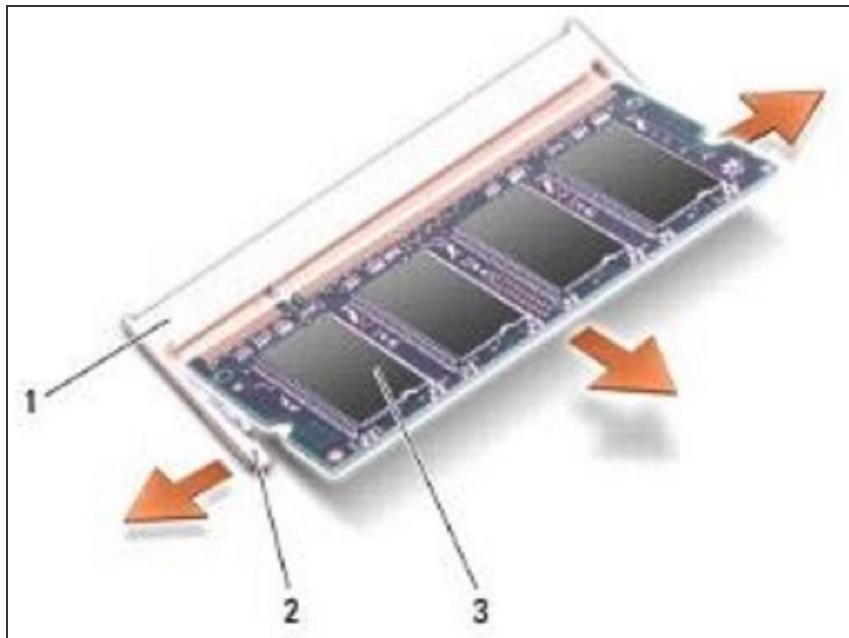

⚠ Follow the procedures in [Before You Begin](#).

- Remove the module cover (see [Base Cover](#)).


Step 2 — Popping up the Memory Module

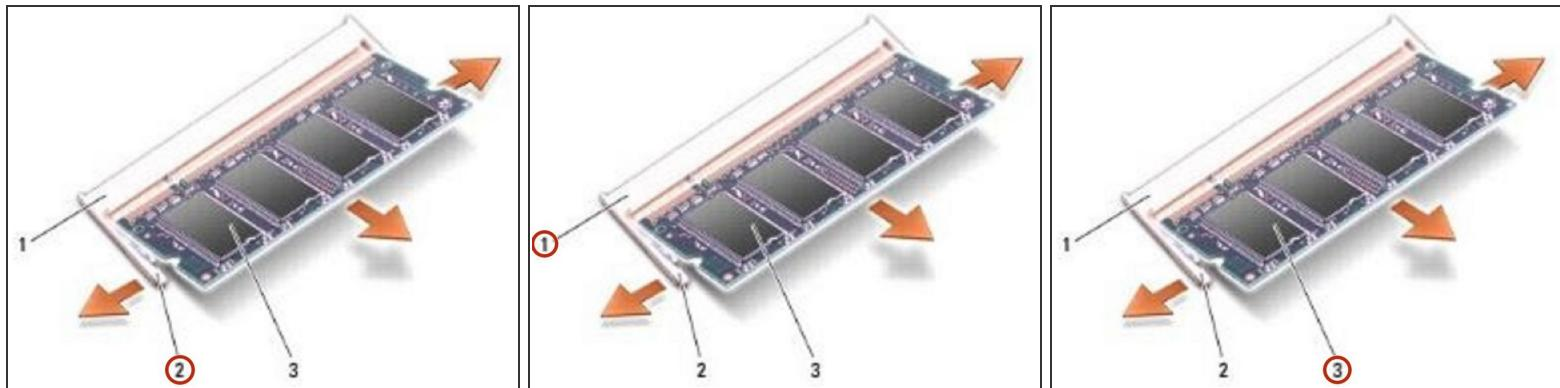

★ NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.


- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.

Step 3 — Removing the Module

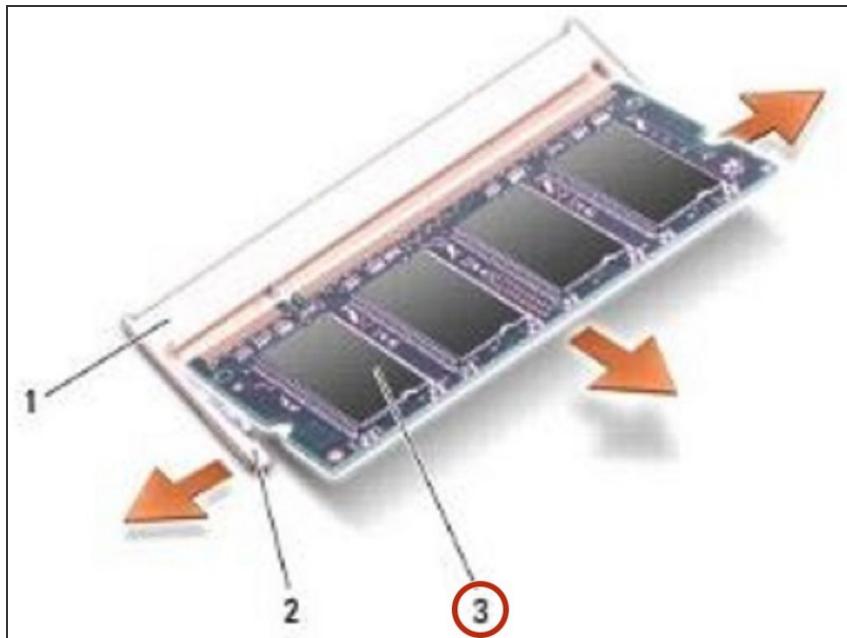


- Remove the module from the connector.

Step 4 — Align the Notch

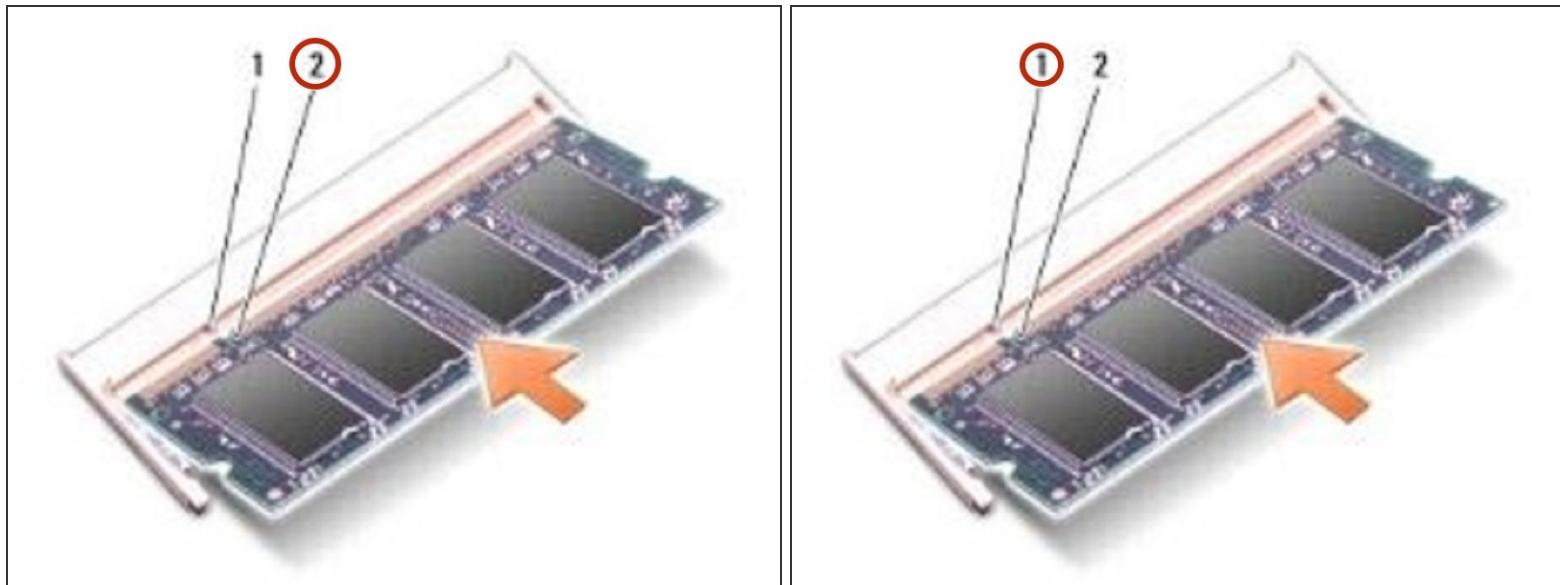

- Align the notch in the module edge connector with the tab in the connector slot.

Step 5 — Sliding the Module

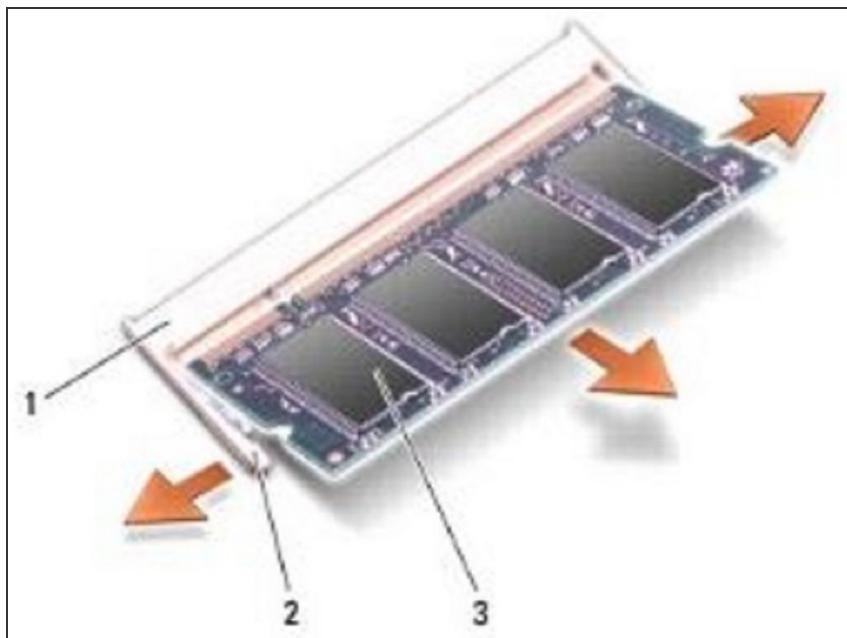

- Slide the **NEW** module firmly into the slot at a 45-degree angle, and rotate the module down until it clicks into place. If the module does not click into place, remove the module and reinstall it.

i NOTE: If the memory module is not installed properly, the computer may not boot.