




Dell Inspiron 14z N114z Memory Modules Replacement


Written By: Terrence15

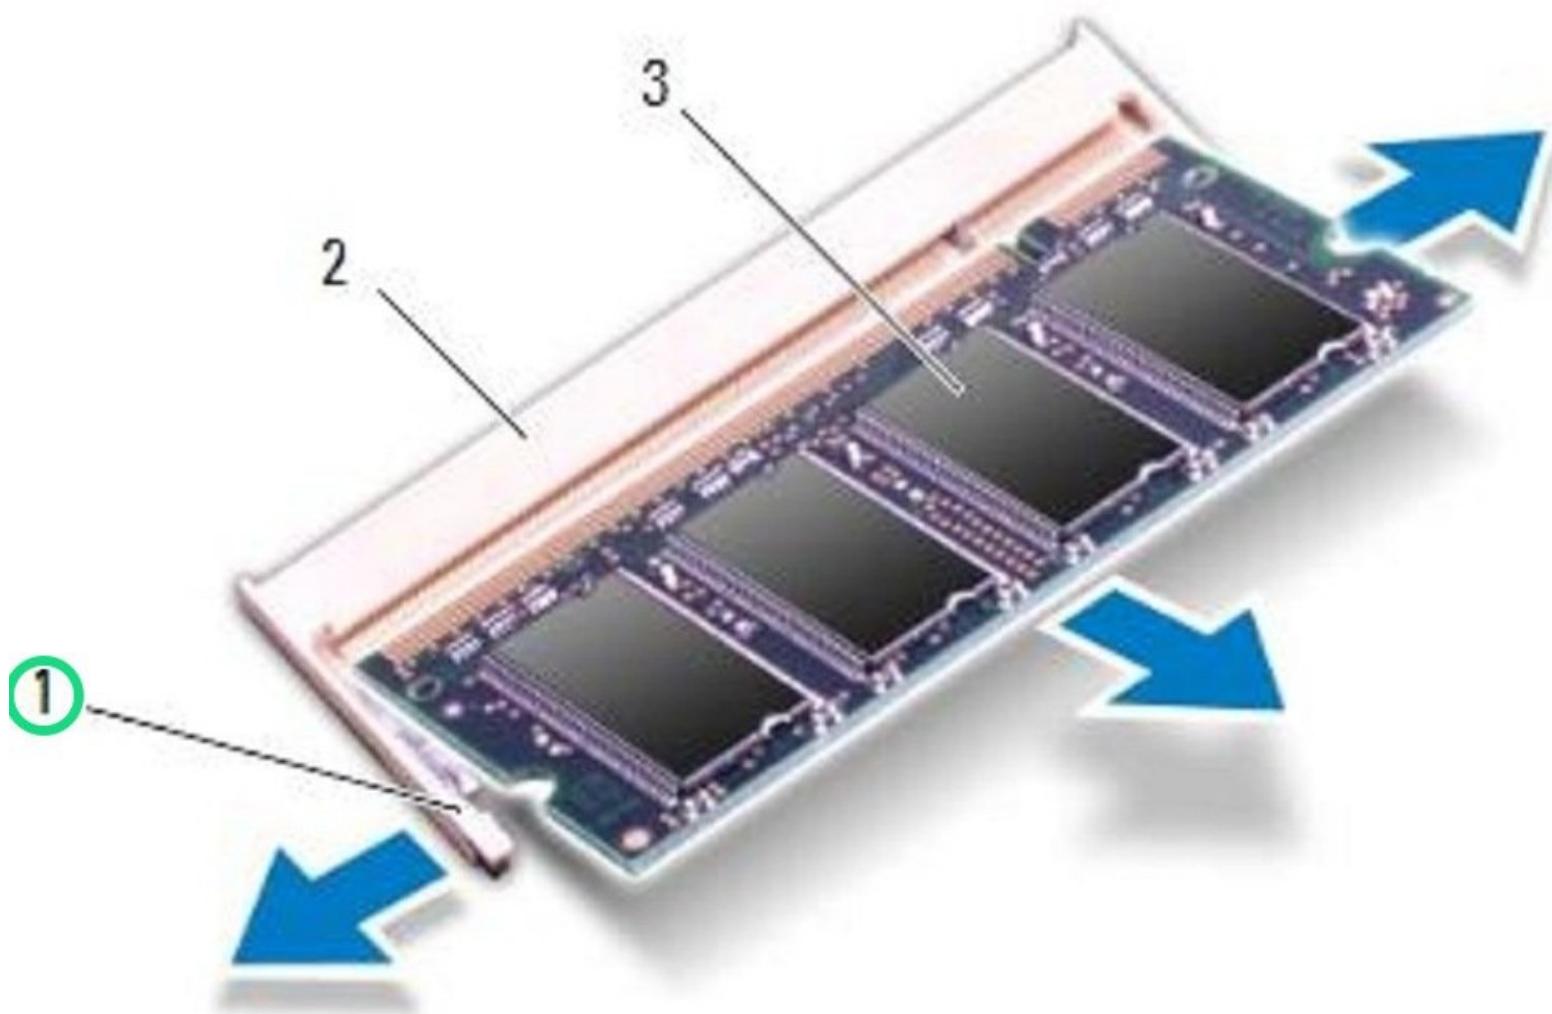

INTRODUCTION

In this guide, we will be showing you how to remove and replace the Memory Modules.

Step 1 — Popping up the Memory Module

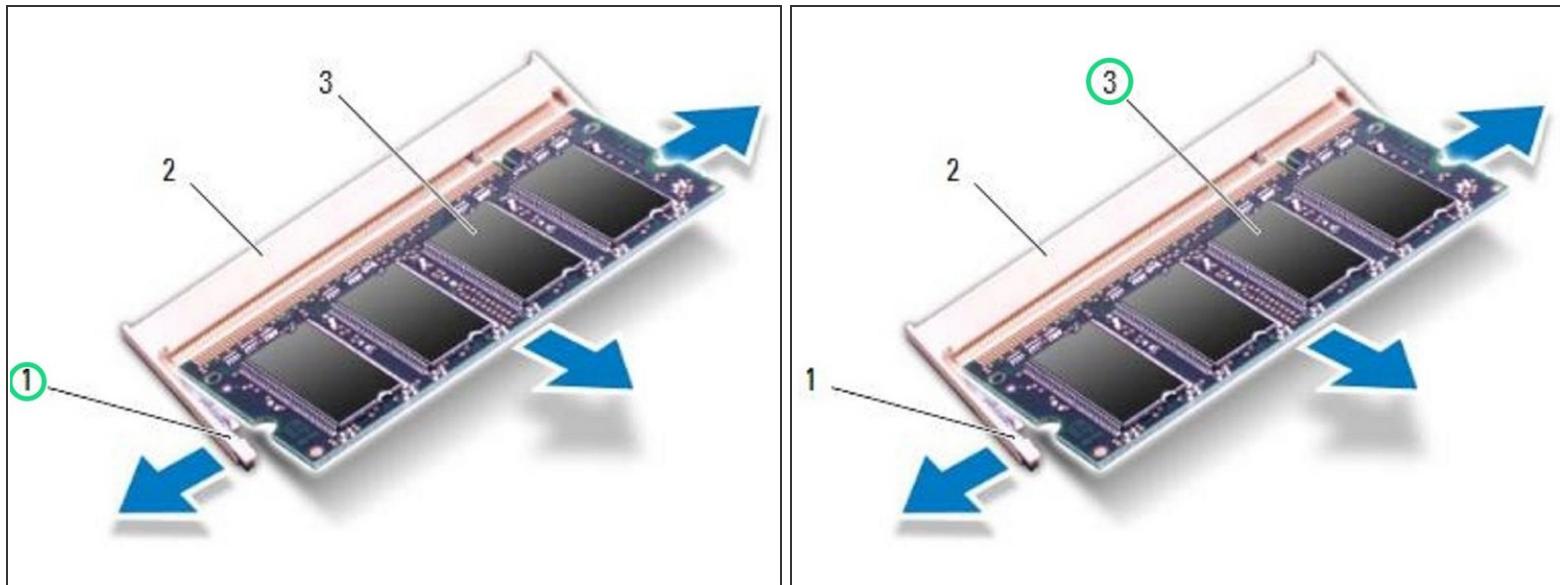


⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in ["Before You Begin"](#).

⚠ CAUTION: To prevent damage to the memory-module connector, do not use tools to spread the memory module securing clips.


- Use your fingertips to carefully spread apart the securing clips on each end of the memory-module connector until the memory module pops up.

Step 2 — Remove the Memory Module

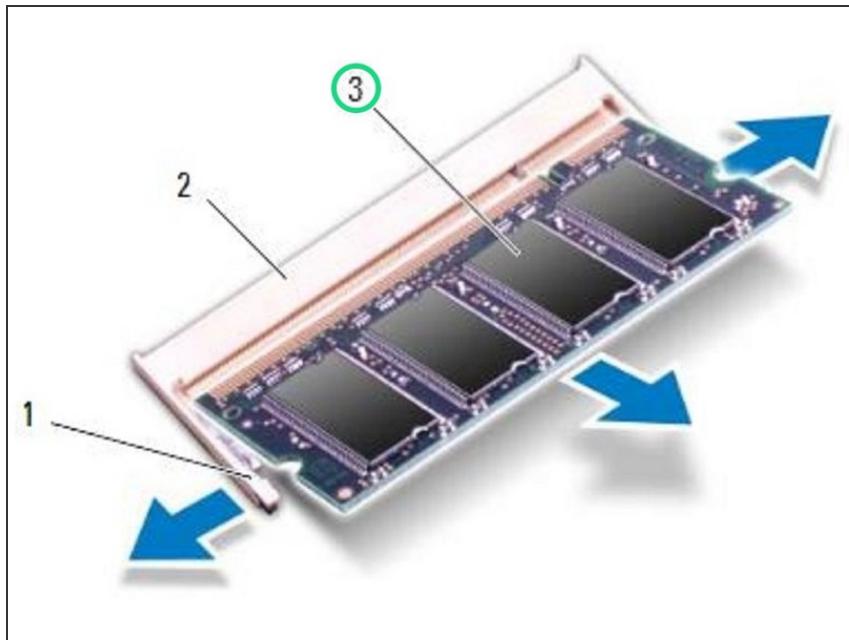


- Remove the memory module from the memory-module connector.

Step 3 — Align the Notch

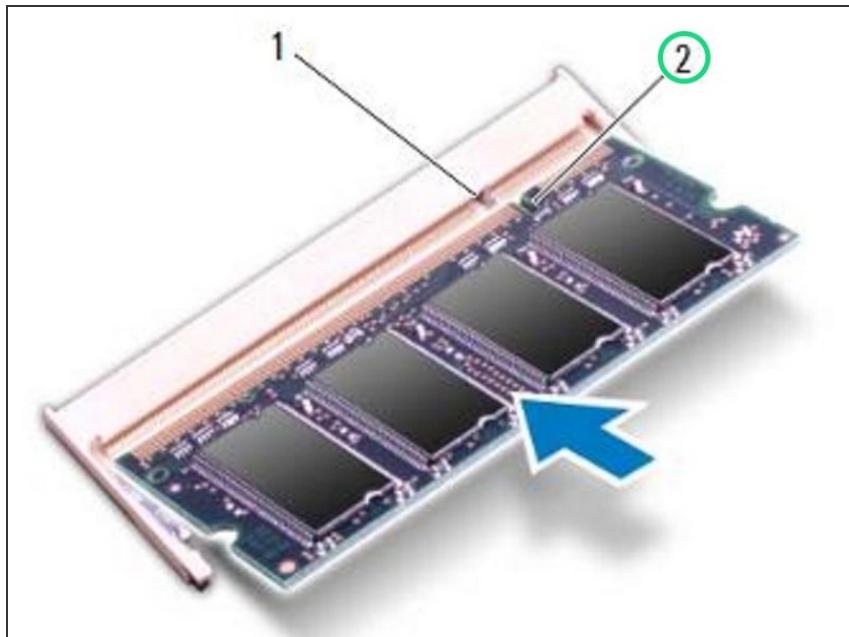

- Align the notch on the **NEW** memory module with the tab in the memory-module connector.

Step 4 — Sliding the Module

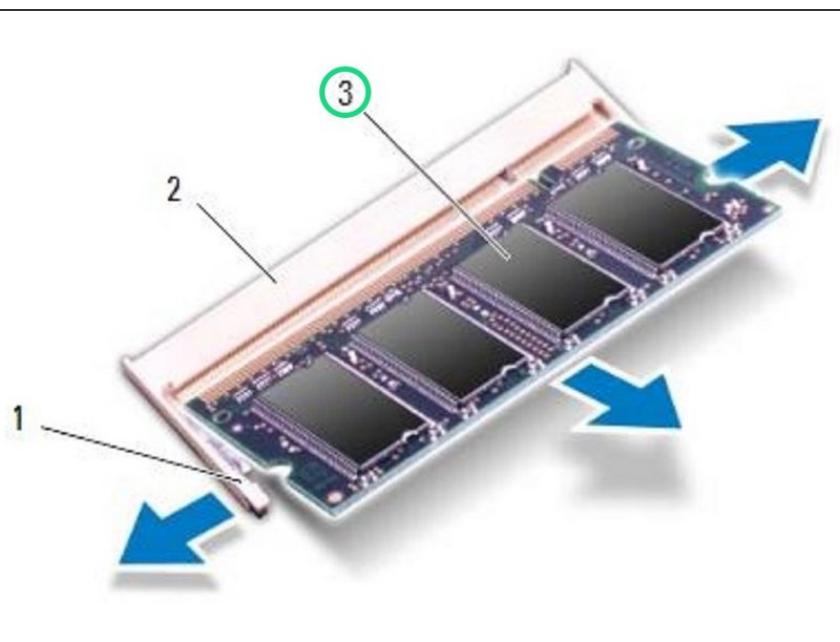

- Slide the memory module firmly into the memory-module connector at a 45-degree angle, and then press down the memory module on both sides until it clicks into place. If you do not hear the click, remove the memory module and reinstall it.

i NOTE: If the memory module is not installed properly, the computer may not boot.