




# Dell Studio 1440 Memory Module Replacement

Written By: Johnathan Hammond

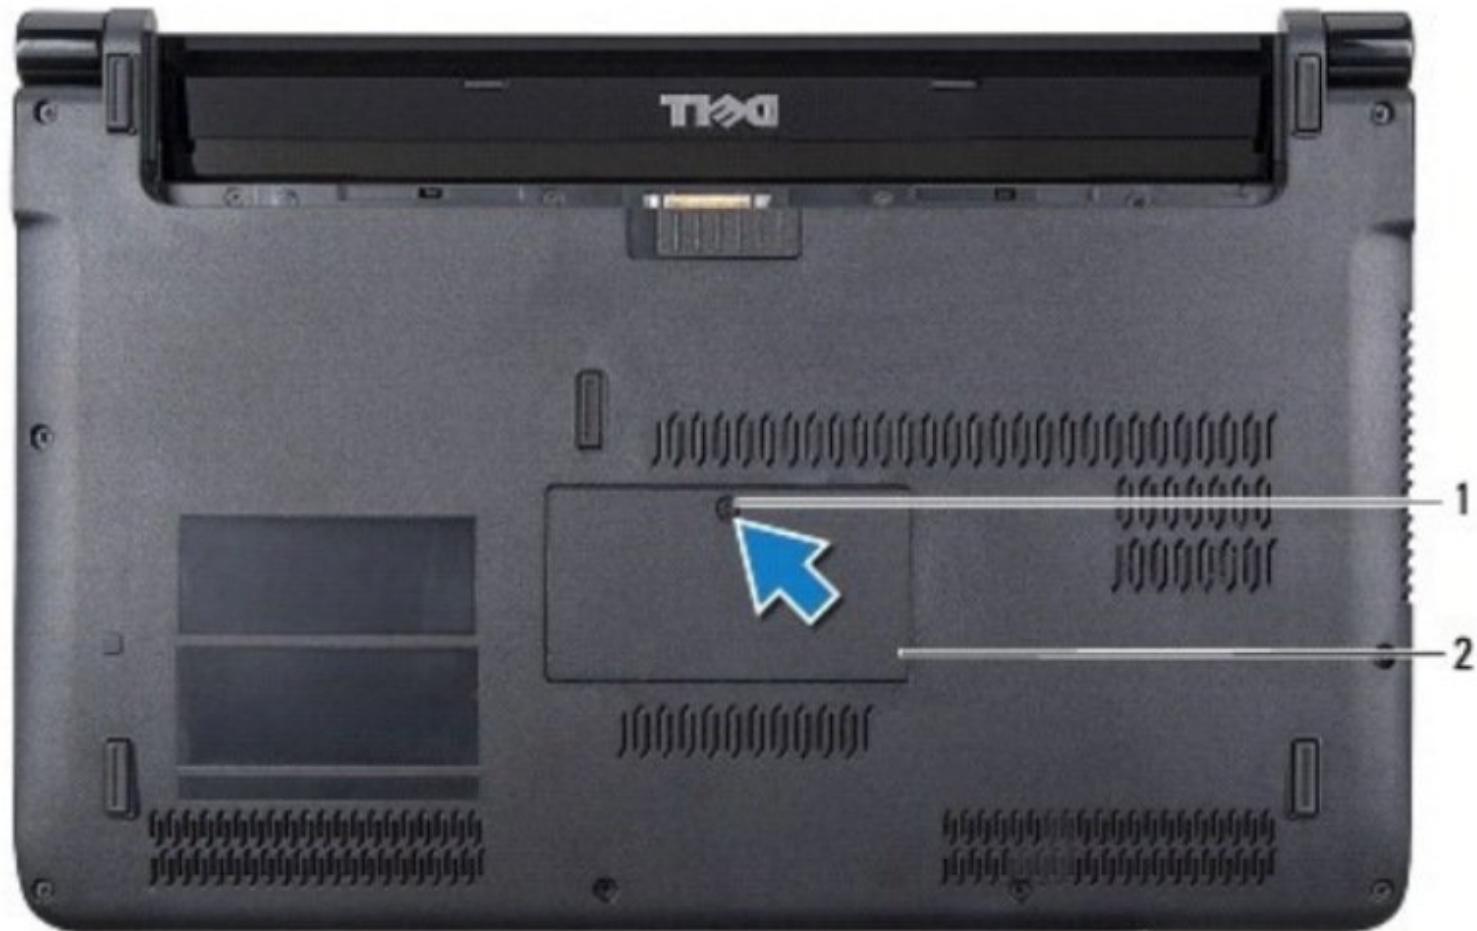

 **TOOLS:**

- Phillips #0 Screwdriver (1)

## Step 1 — Battery




- Slide the battery release latch until it clicks into place.
- Slide the battery out of the battery bay.

## Step 2 — Memory Module



- Turn the computer over and loosen the captive screw on the memory module cover.
- Remove the memory module cover.

## Step 3

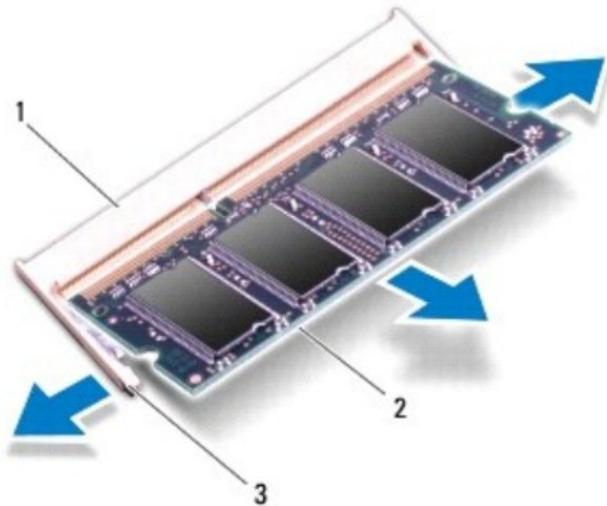

- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the memory module pops up.
- Remove the memory module from the memory module connector.

To reassemble your device, follow these instructions in reverse order.