




Dell Vostro 1000 Memory Module Replacement


Written By: Johnathan Hammond

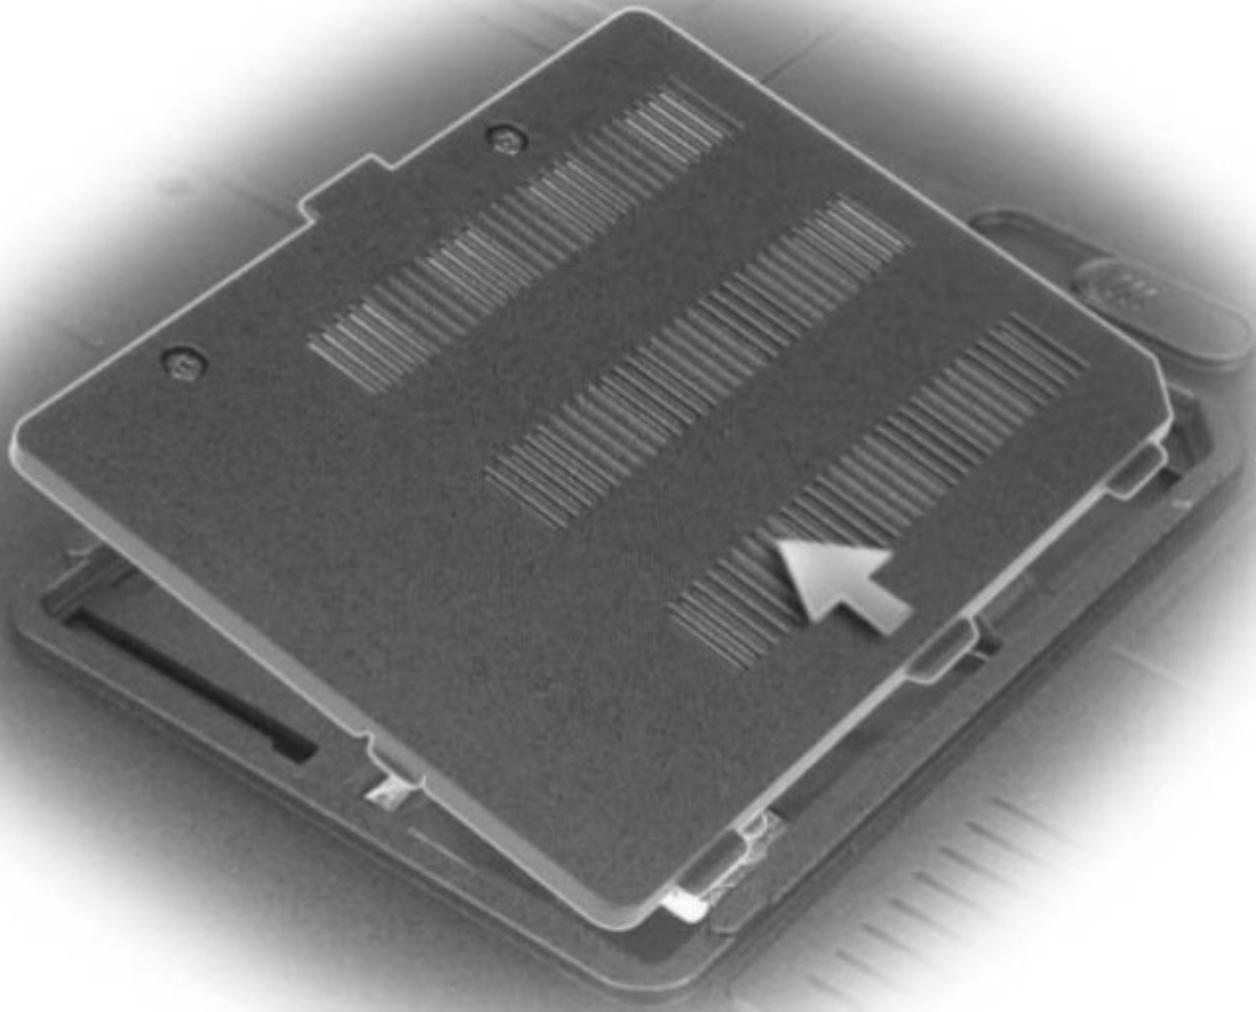

 **TOOLS:**


- Phillips #0 Screwdriver (1)

Step 1 — Battery

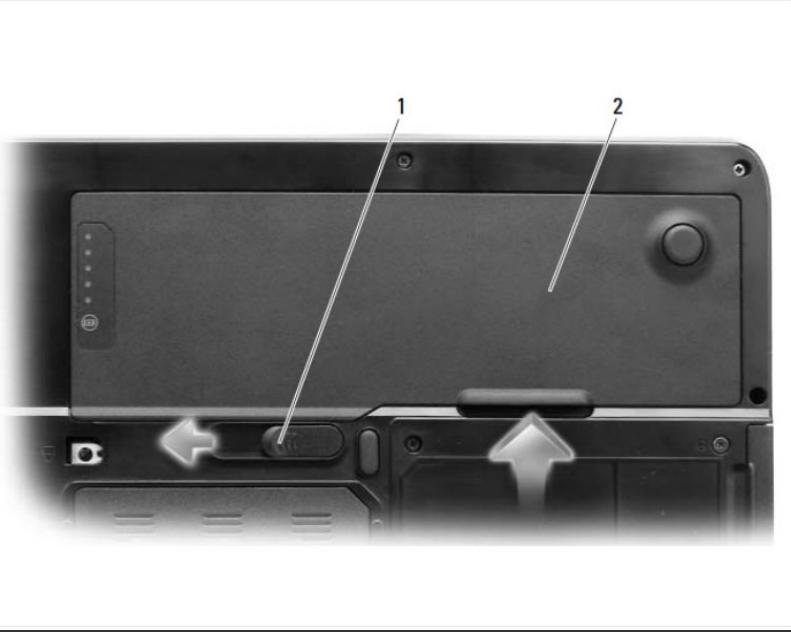


- Slide and hold the battery-bay latch release on the bottom of the computer, and then lift the battery from the bay.

Step 2 — Memory Module

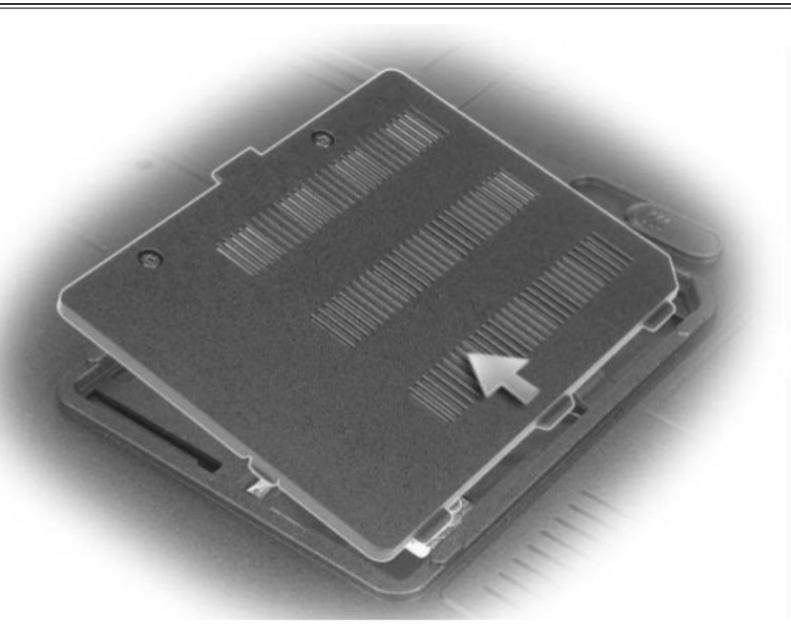

- loosen the captive screws on the memory module cover, and then remove the memory module cover.

Step 3

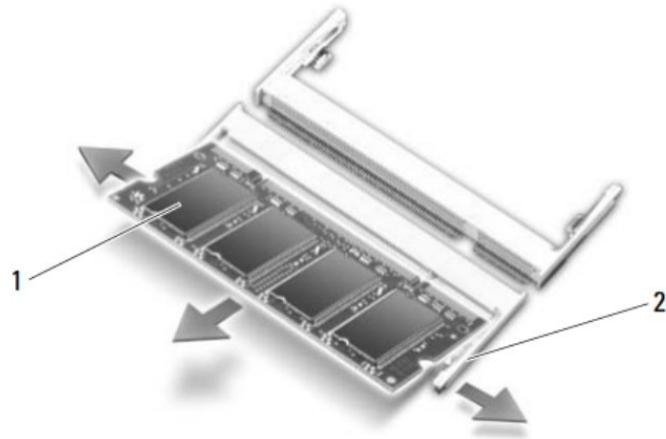

NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memory-module securing clips.

NOTICE: To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on the back of the computer).

- Use your fingertips to carefully spread apart the memory-module securing clips on each end of the memory module connector until the module pops up.
- Remove the module from the connector.

To reassemble your device, follow these instructions in reverse order.