




# Dell Vostro 15 7570 Memory Module Replacement


Written By: Johnathan Hammond

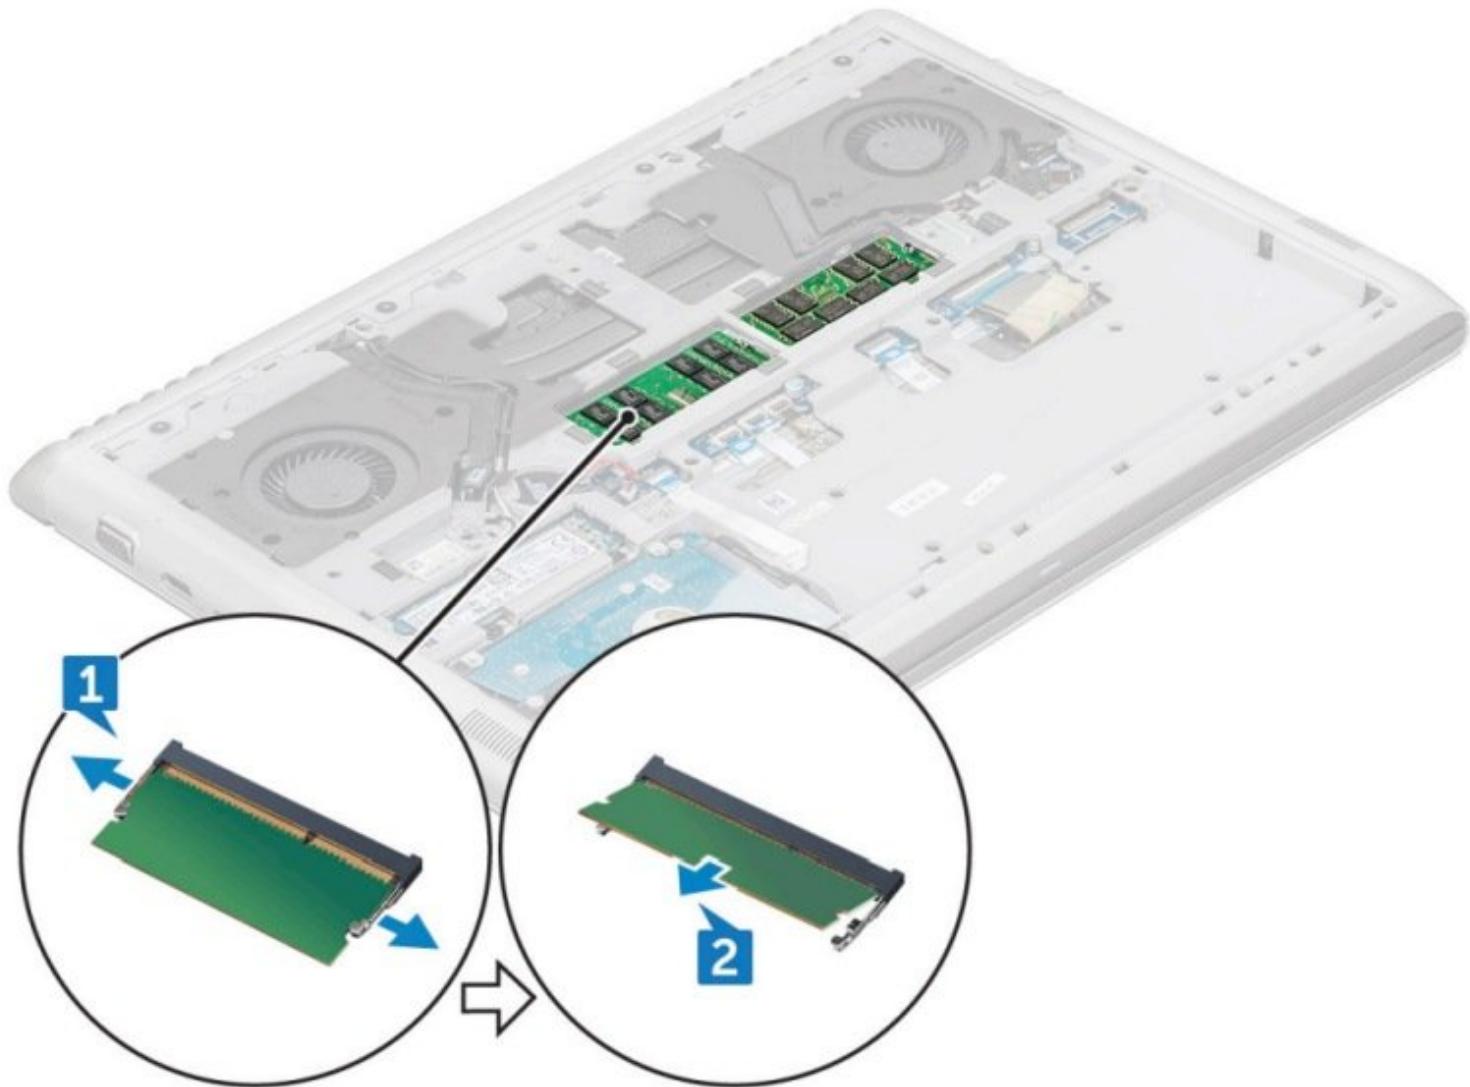

 **TOOLS:**


- **Spudger** (1)
- **Phillips #0 Screwdriver** (1)
- **Phillips #1 Screwdriver** (1)

## Step 1 — Base Cover

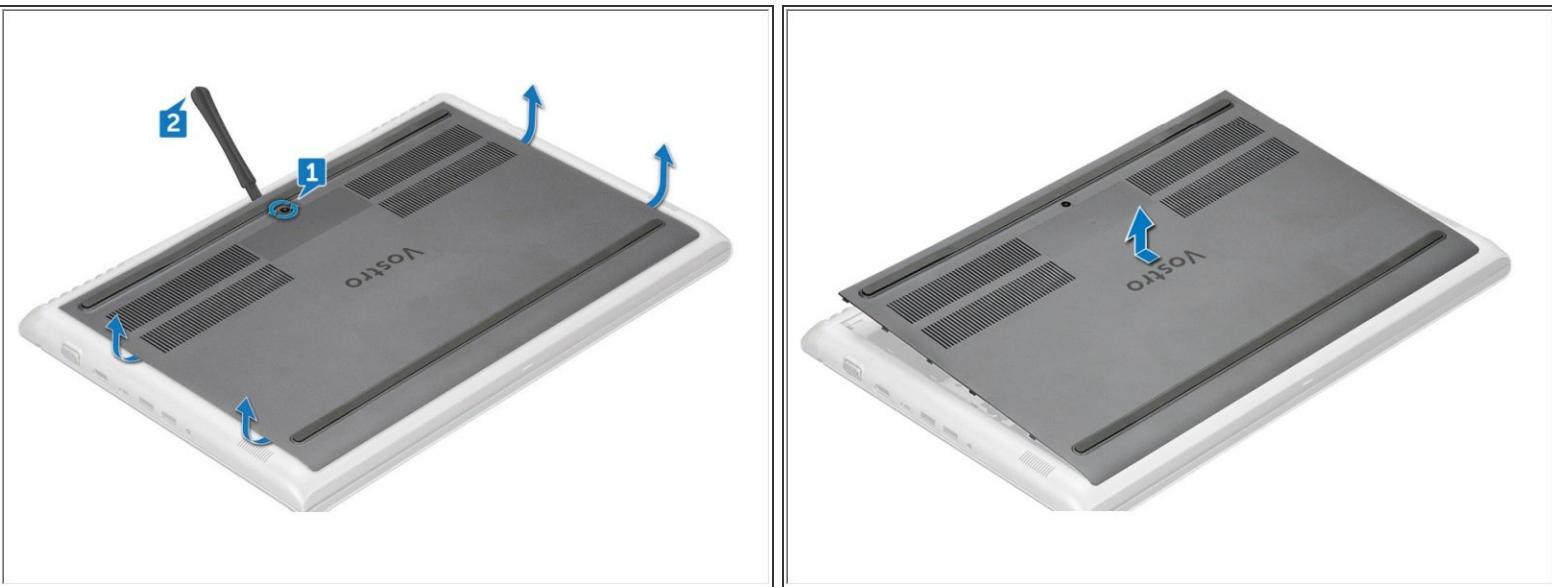


- Loosen the M2.5x2+3.5 captive screws that secure the base cover to the computer [1].
- Pry the base cover from the edge [2].
- Lift the base cover away from the computer

## Step 2 — Battery (model 99NF2)

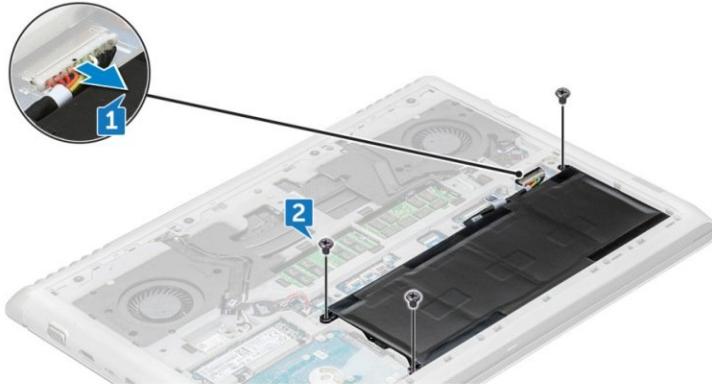

- Disconnect the battery cable from the connector on the system board [1].
- Remove the M2x3L screws that secure the battery to the computer [2].

## Step 3 — Memory Module

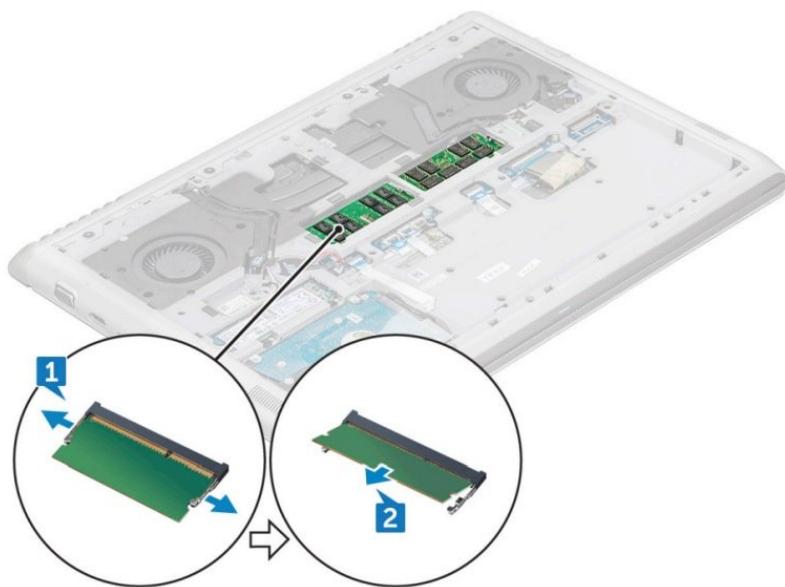

- Pry the clips securing the memory module until the memory pops-up [1]
- Lift the memory module away from the connector [2].

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-11-15 03:01:52 PM (MST).

