




# Dell Vostro 3450 Memory Module Replacement

Written By: Johnathan Hammond

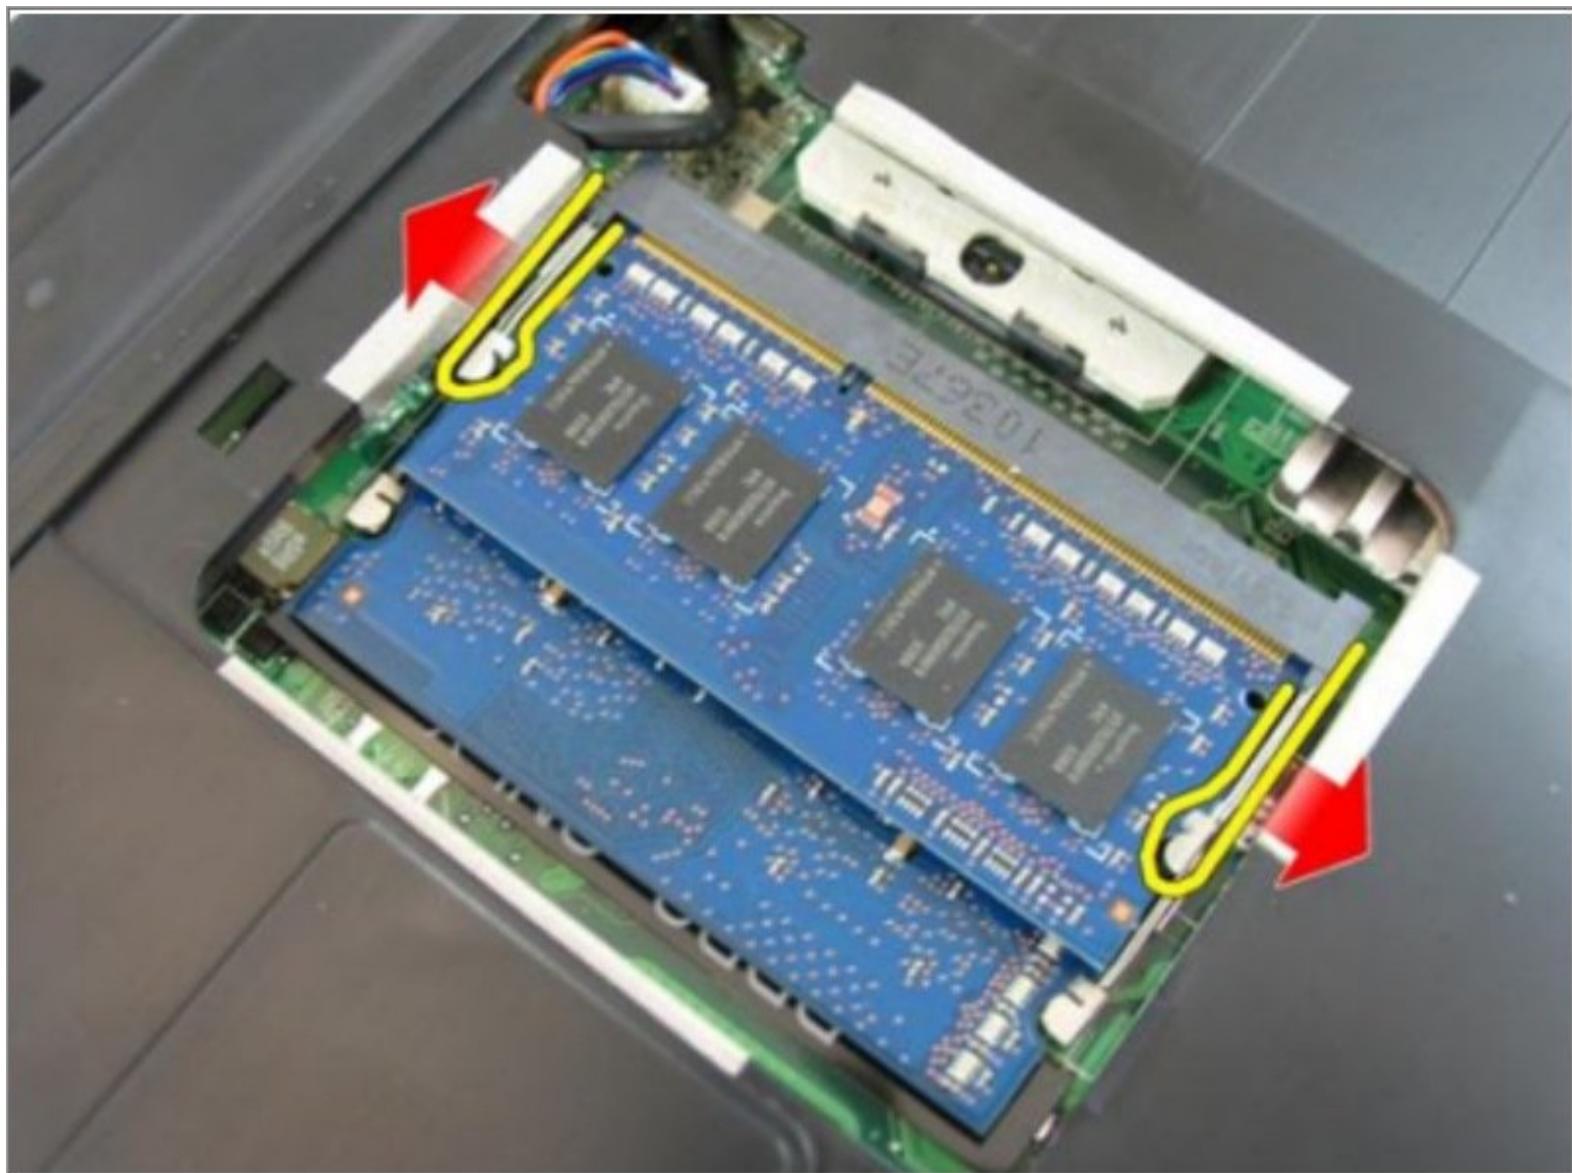

## INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Module.

### TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)

## Step 1 — Unlocking the Battery



- Slide the left and the right battery release latches to the unlock position.

## Step 2 — Removing the Battery




- Slide the battery and remove it from the computer.

## Step 3 — Loosen the Screw



- Loosen the screw that secures the memory door.


## Step 4 — Removing the Memory Door

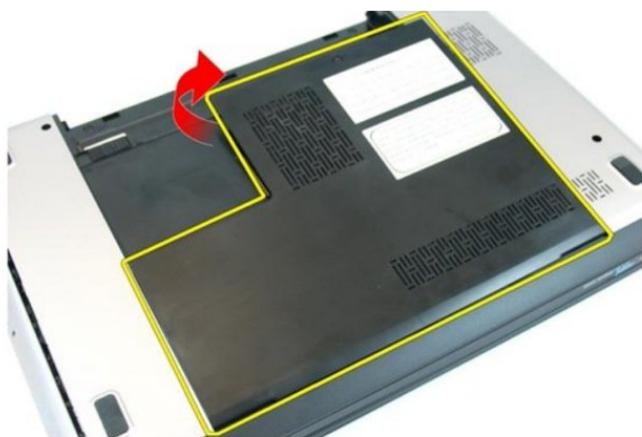

- Pry up the memory door near the screw hole, lift and remove it.


 If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 5 — Popping up the Memory Module

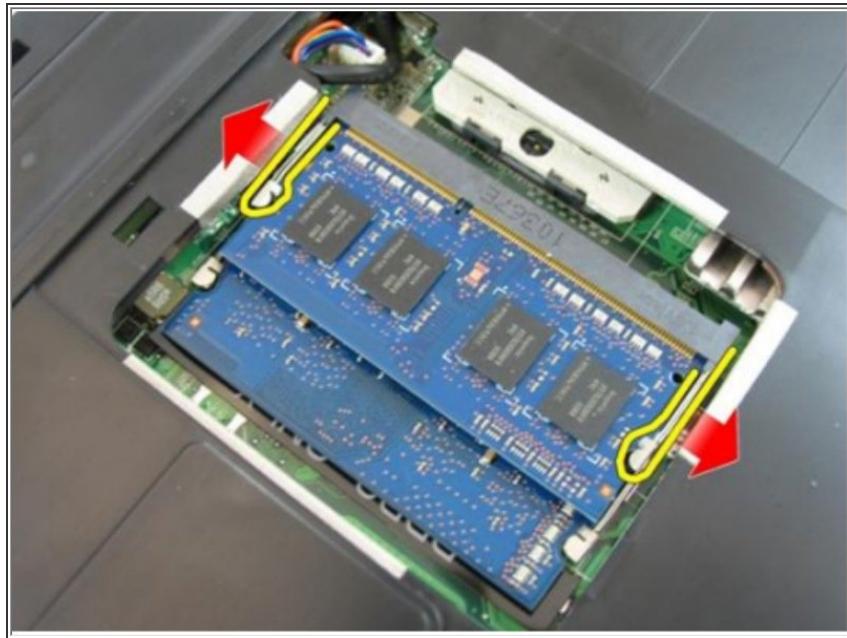

- Pry the retention clips away from the memory module until it pops up.

## Step 6 — Remove the Memory Module

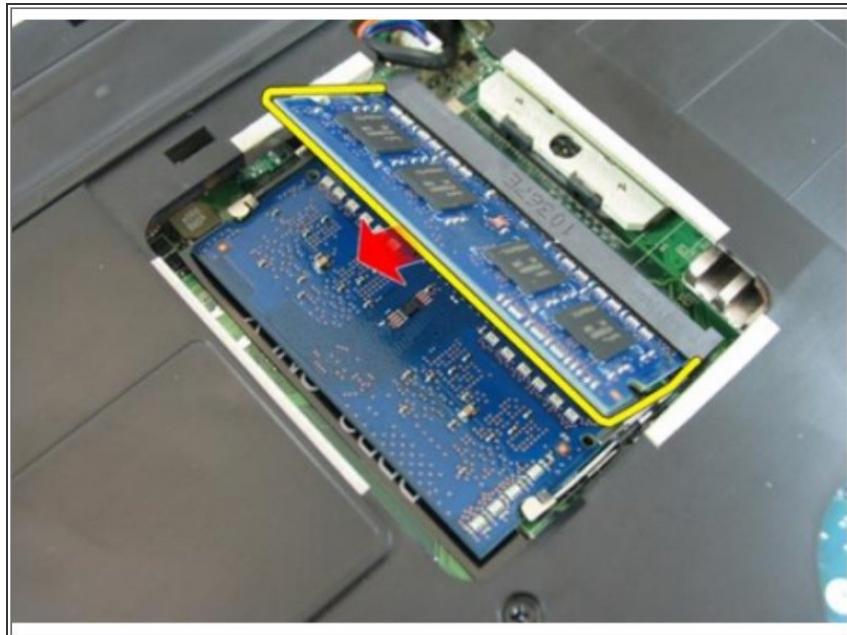

- Remove the memory module from its connector on the system board.