




Dell Vostro 3558 Memory Module Replacement


Written By: Johnathan Hammond

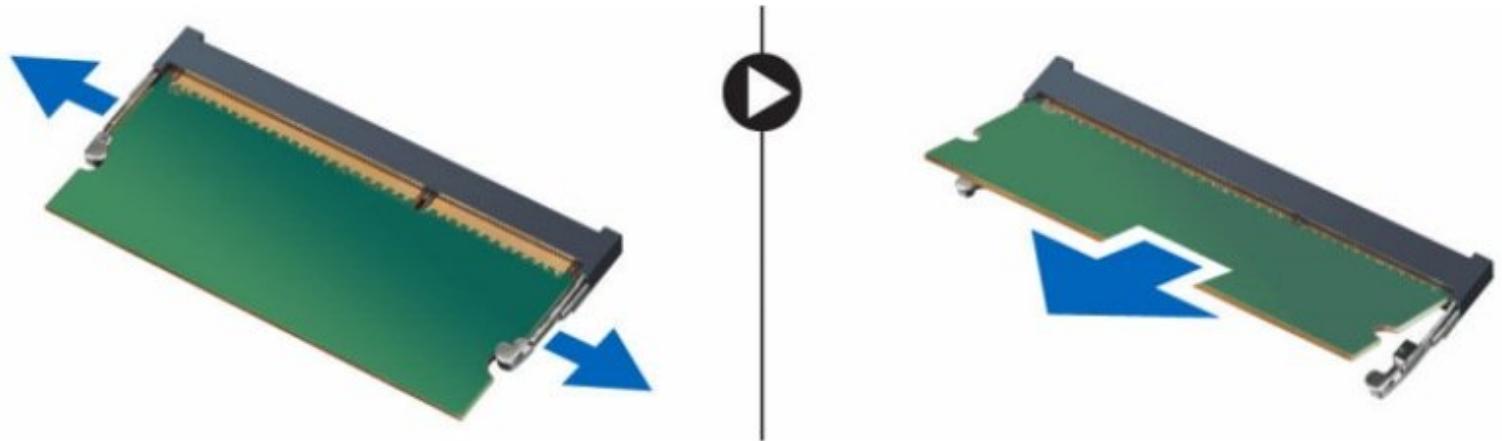

 **TOOLS:**


- Phillips #0 Screwdriver (1)

Step 1 — Unlocking the Battery

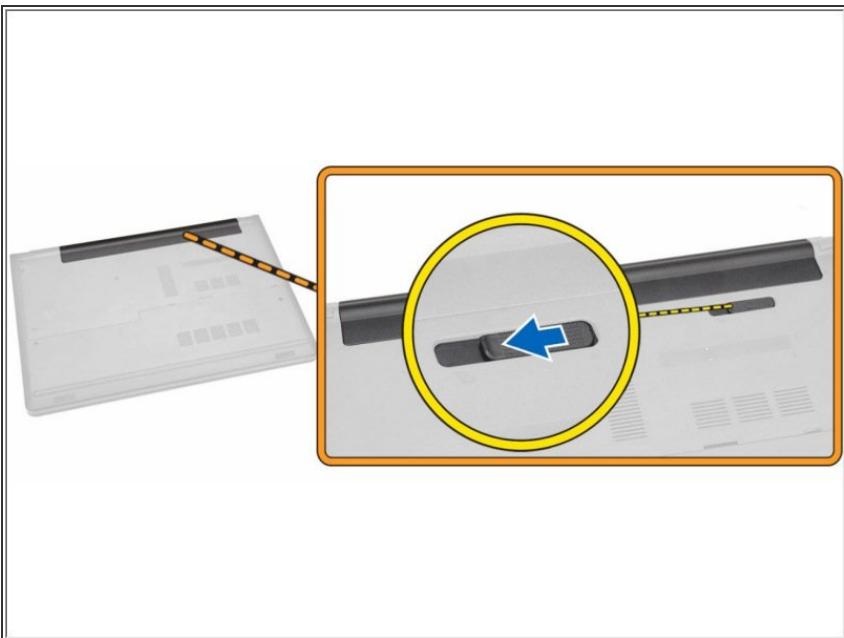

- Slide the release latch outwards to unlock the battery.


Step 2 — Removing the Battery

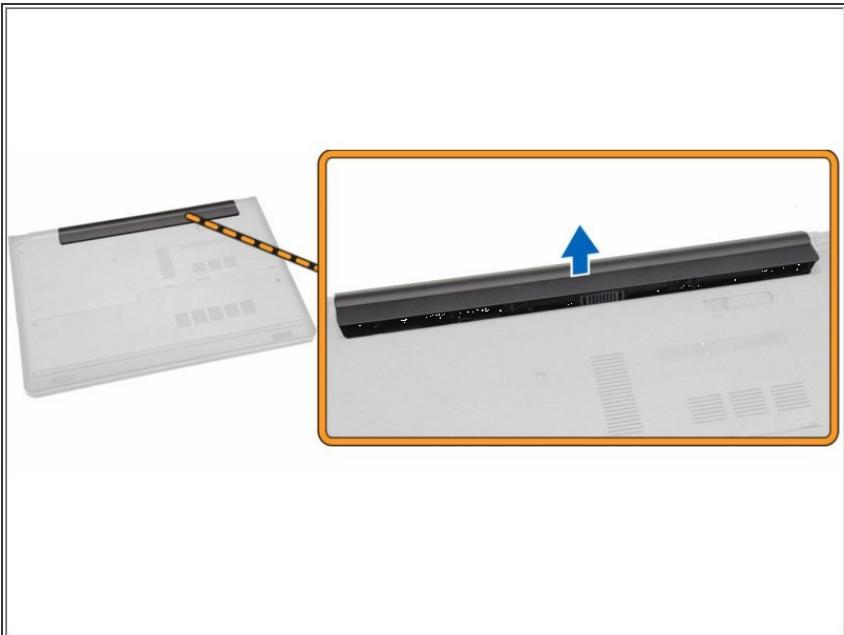

- Remove the battery from the computer.


★ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 3 — Access Panel

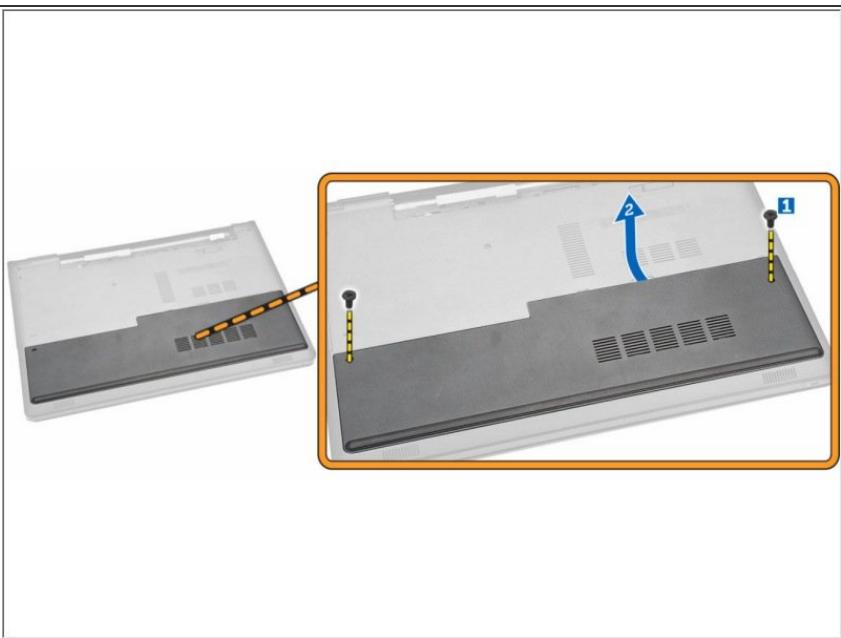

- Remove the screws that secure the access panel to the computer [1].
- Lift the access panel partially at a 45-degree angle [2].


Step 4 — Remove the Access Panel

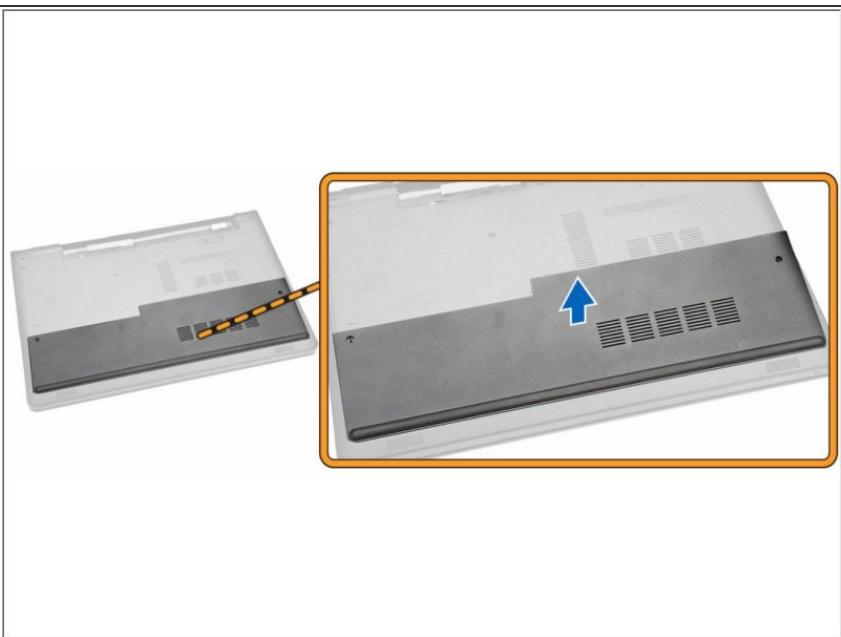

- Remove the access panel from the computer.

If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 5 — Memory Module

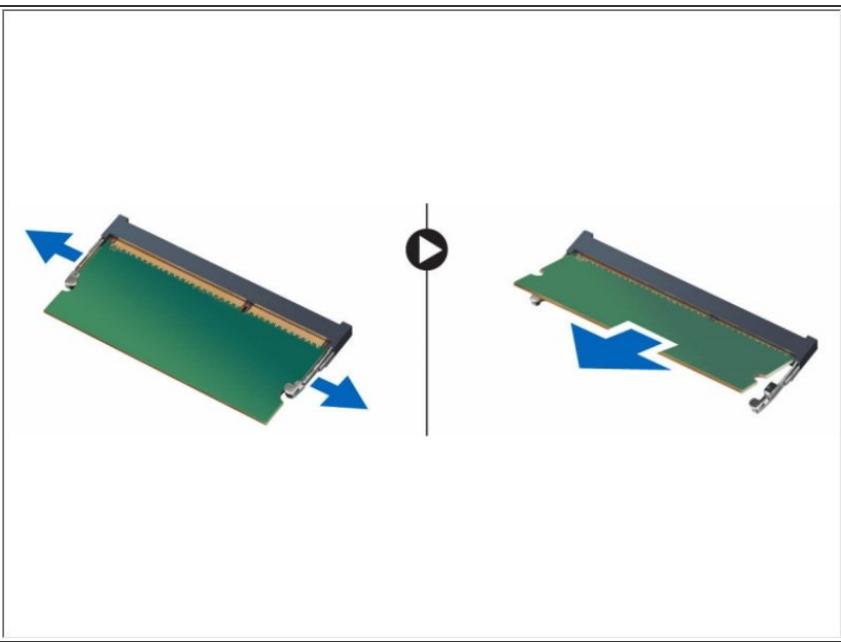

- Pry the securing clips away from the memory module until it pops up
- Remove the memory module from its socket on the system board.
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

To reassemble your device, follow these instructions in reverse order.