




# Dell Vostro 3559 Memory Module Replacement

Written By: Johnathan Hammond

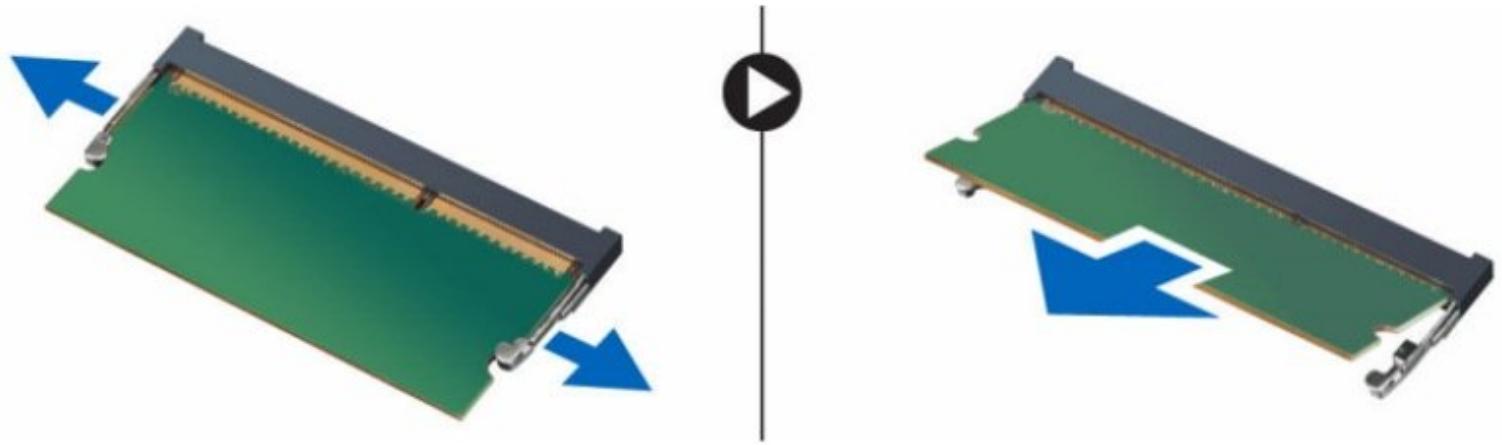


## INTRODUCTION

In this guide, we will be showing you how to remove and replace the Memory Module.

### TOOLS:

- Phillips #0 Screwdriver (1)

## Step 1 — Sliding the Latch

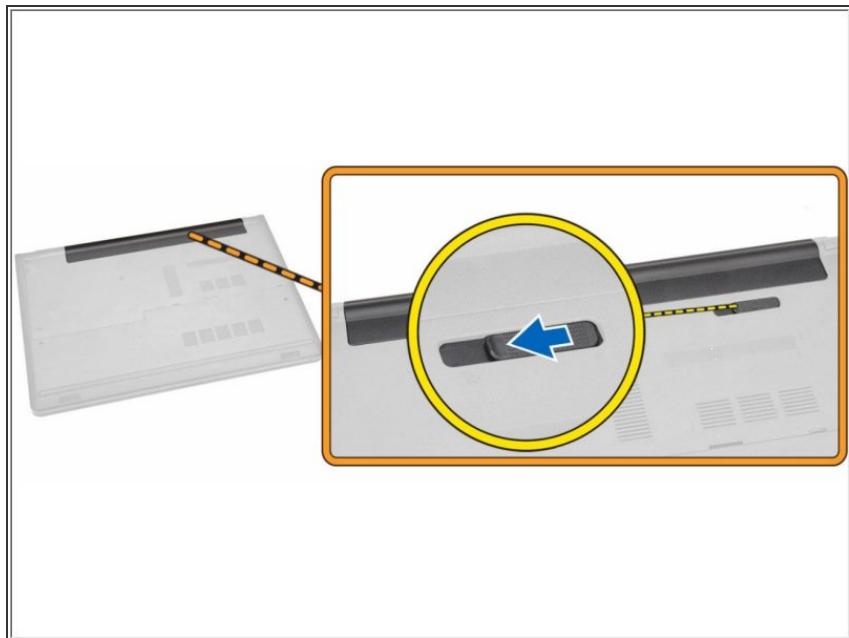

- Slide the release latch outwards to unlock the battery.


## Step 2 — Remove the Battery



- Remove the battery from the computer.


★ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 3 — Remove the Screws

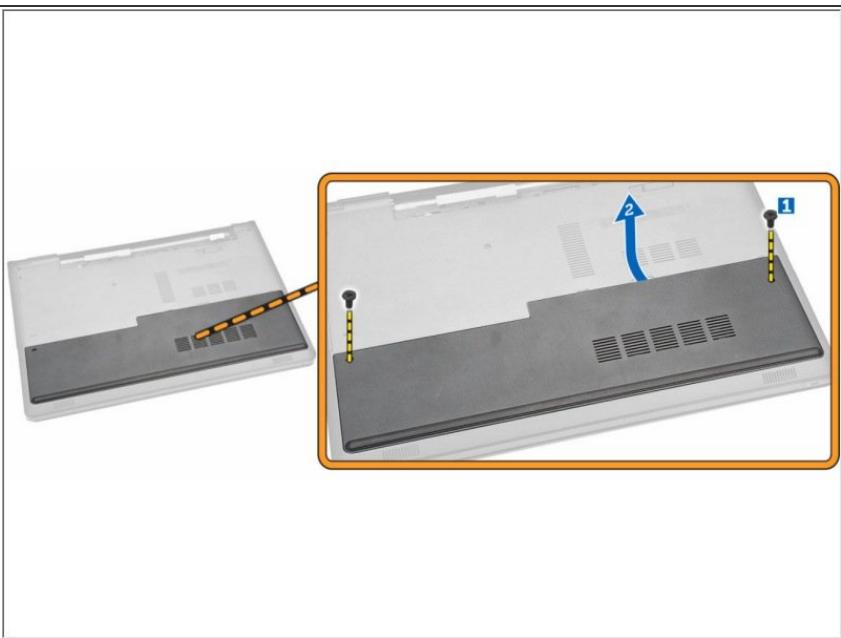

- Remove the screws that secure the access panel to the computer.
- Lift the access panel partially at a 45-degree angle.


## Step 4 — Remove the Access Panel

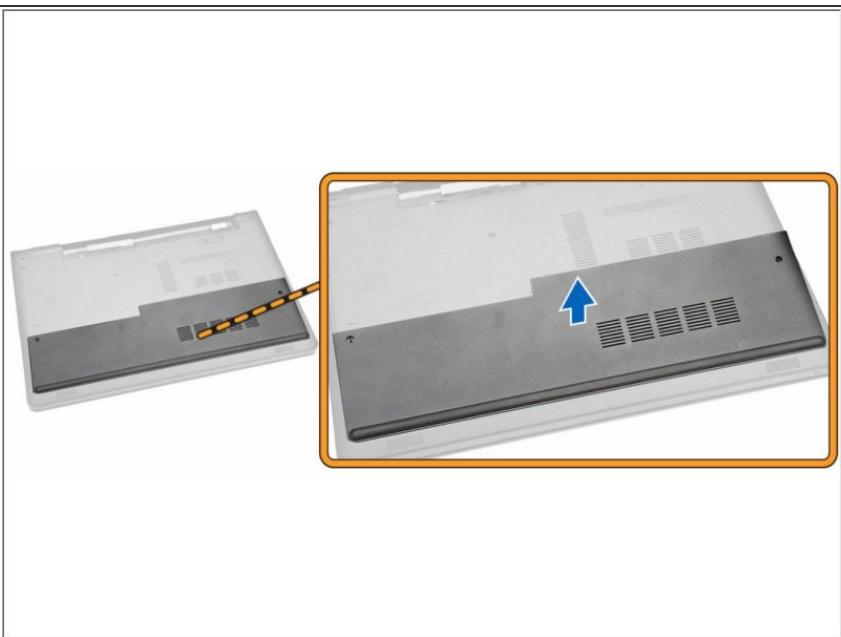

- Remove the access panel from the computer.

If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 5 — Removing the Memory Module

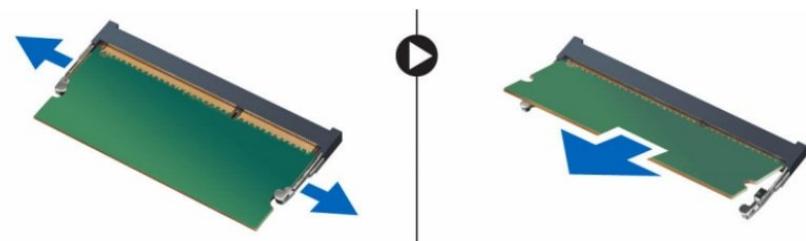

- Pry the securing clips away from the memory module until it pops up.
- Remove the memory module from its socket on the system board.

 If this is all you are doing Follow Step In Reverse if not Go to Next Step.