




# Dell Vostro 500 Memory Module Replacement

Written By: Johnathan Hammond

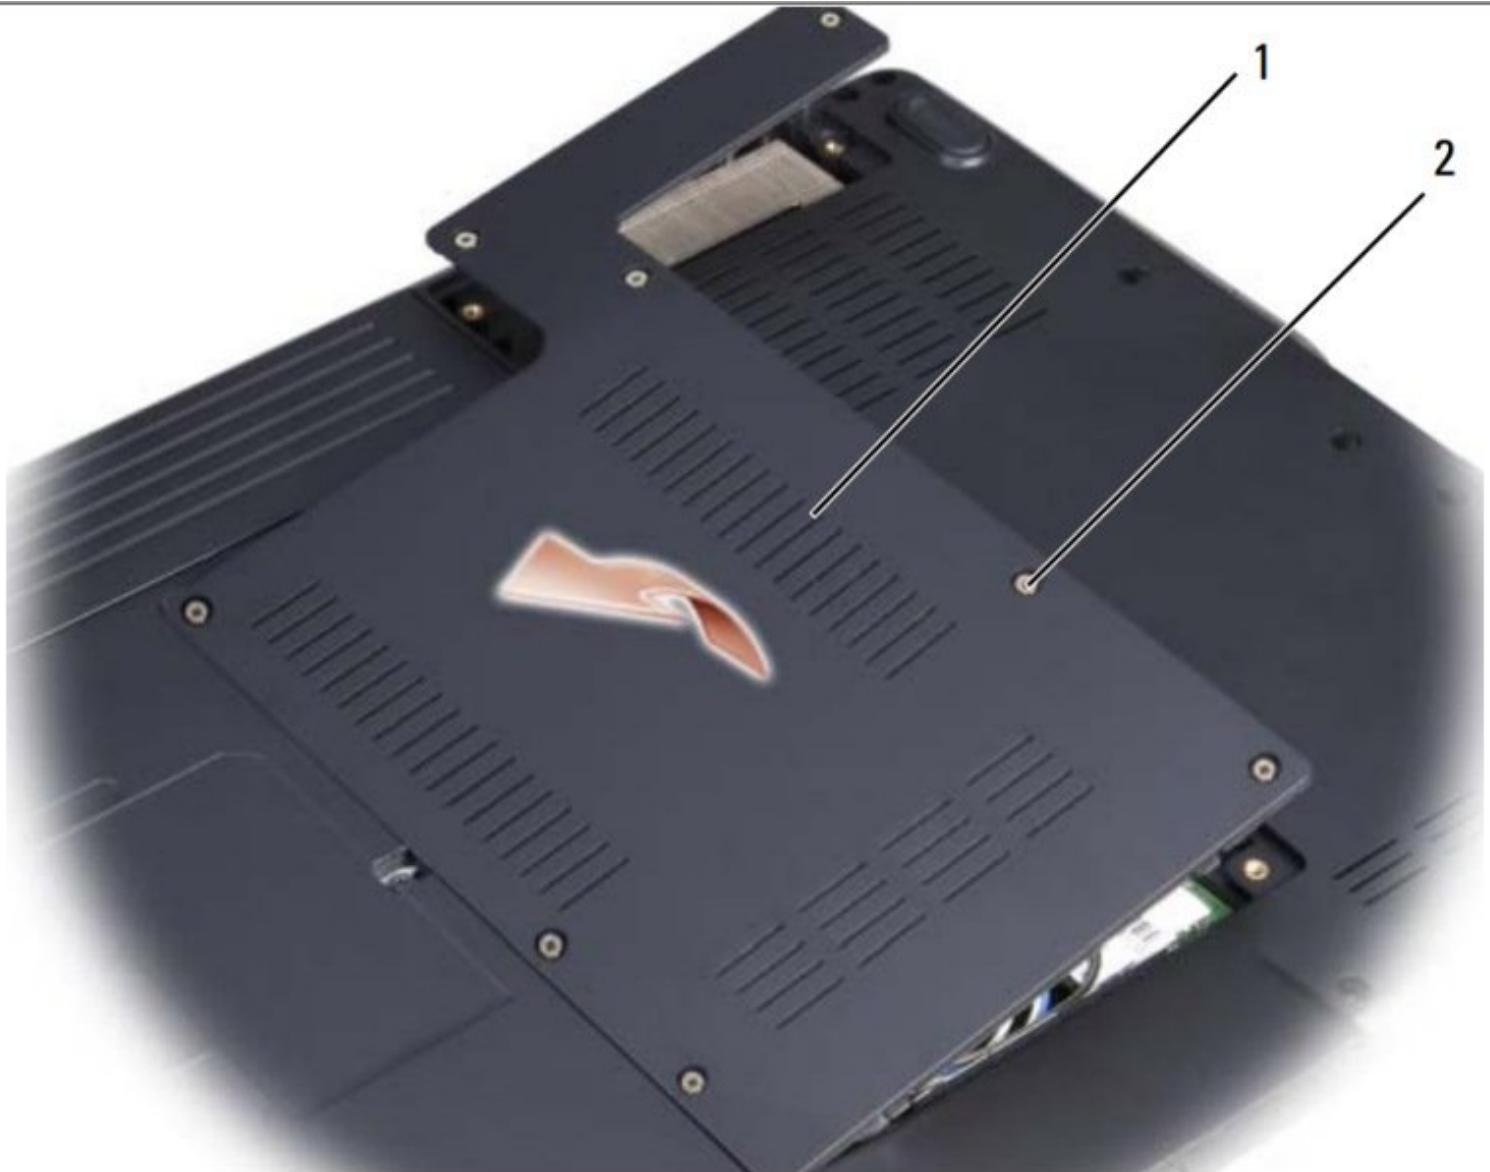


## INTRODUCTION

In this guide, will be showing you how to remove and replace the Memory Module.

### TOOLS:

- Phillips #0 Screwdriver (1)

## Step 1 — Removing the Battery

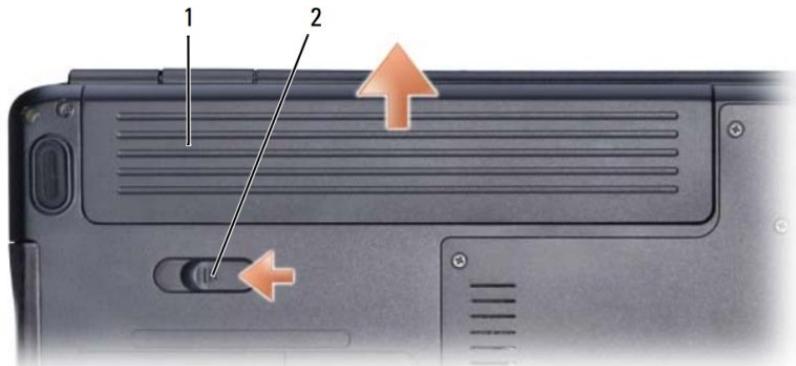

- Slide the battery release latch toward the side of the computer until it is engaged.
- Slide the battery out of the bay.


 If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 2 — Removing the Cover



- Turn the computer upside-down, loosen the eight captive screws on the cover and remove the cover.

## Step 3 — Popping up the Memory Module

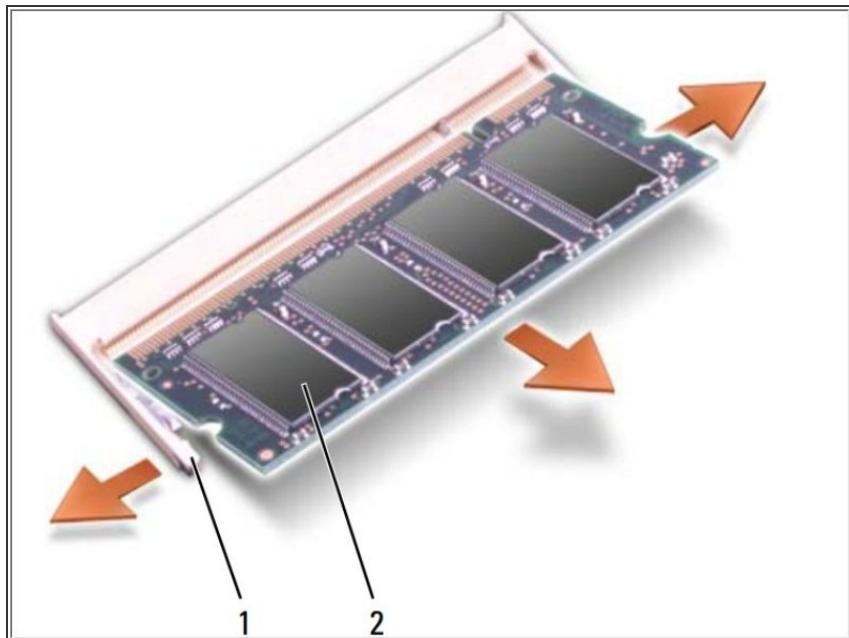

**NOTICE:** To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.

**NOTICE:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on the back of the computer).

- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.
- Remove the module from the connector.

If this is all you are doing Follow Step In Reverse if not Go to Next Step.