




Dell Vostro 5470 Memory Module Replacement


Written By: Johnathan Hammond

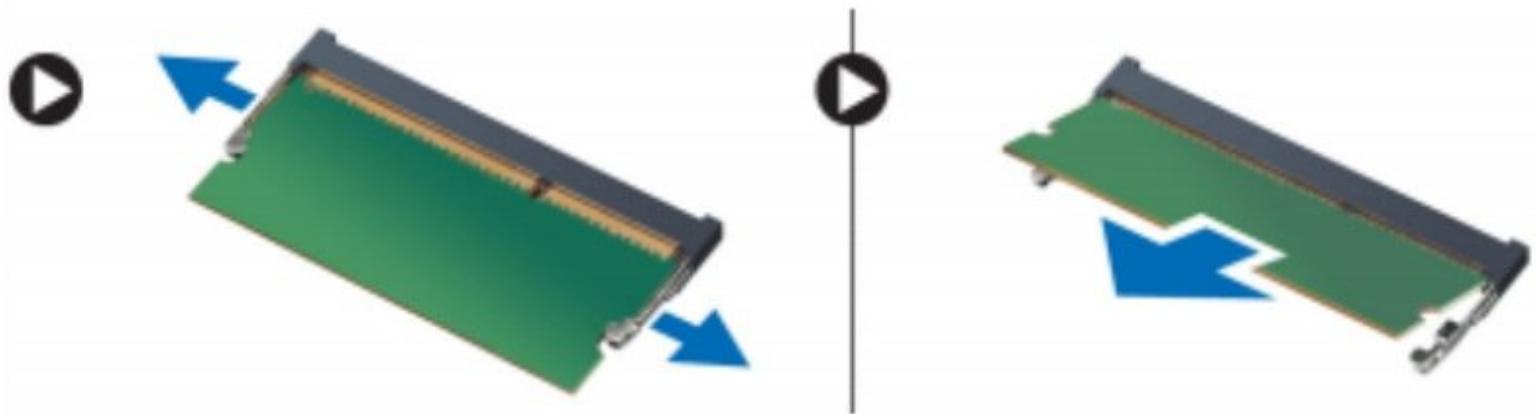

 **TOOLS:**


- Phillips #0 Screwdriver (1)

Step 1 — Remove the Screws

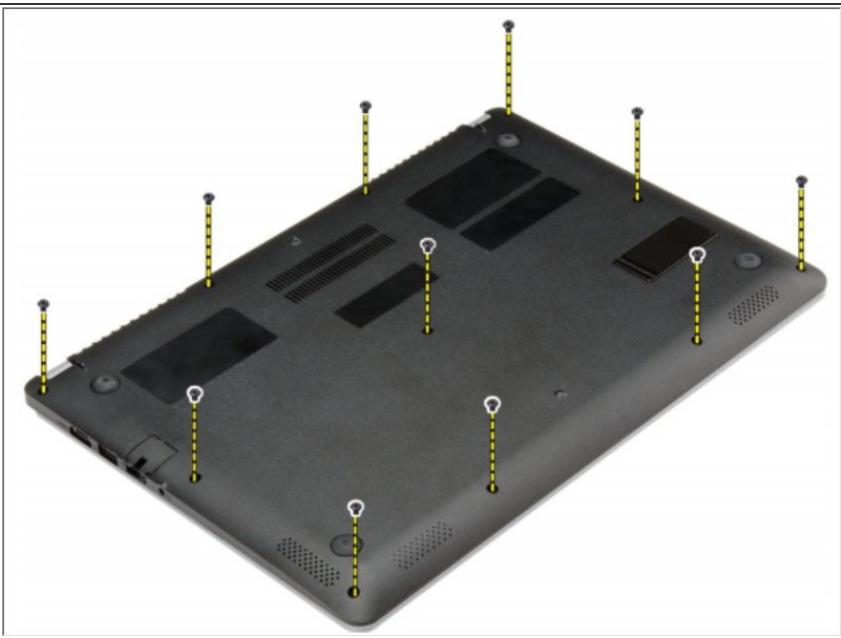

- Remove the screws that secure the base cover to the computer.

Step 2 — Loosening the Base Cover

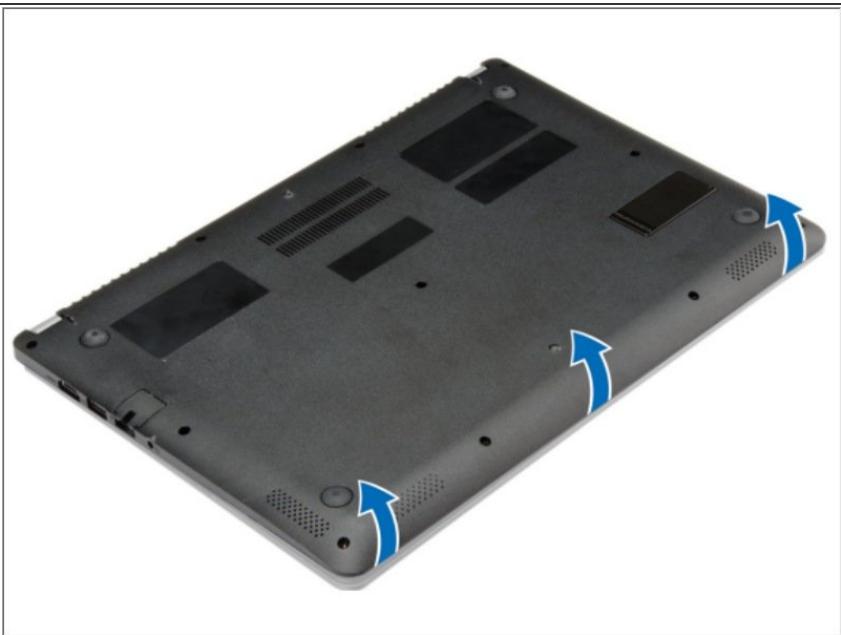

- Pry the base cover along the edges to loosen it.


Step 3 — Removing the Base Cover



- Lift and remove the base cover from the computer.


- ☒ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 4 — Disconnecting the Battery Cable

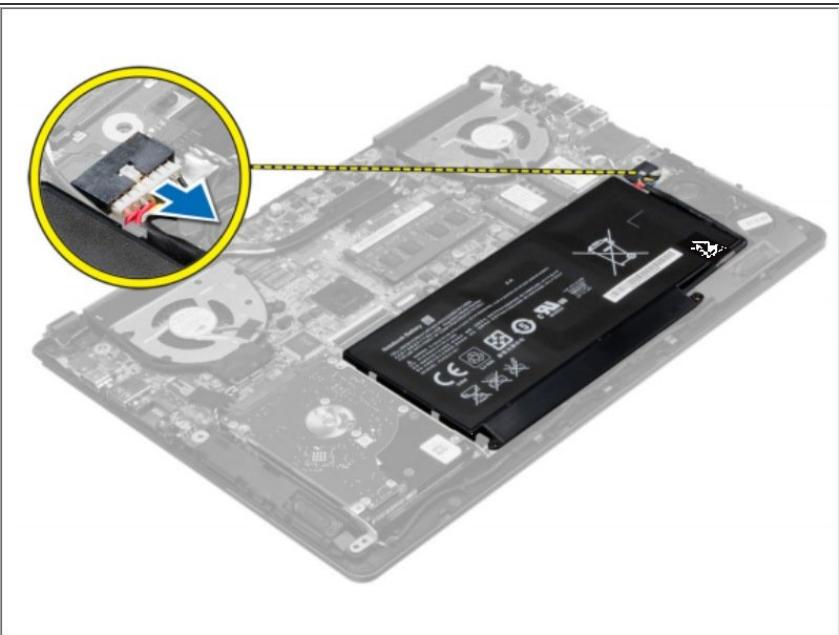


- Disconnect the battery cable from its connector on the system board.

Step 5 — Releasing the Tabs

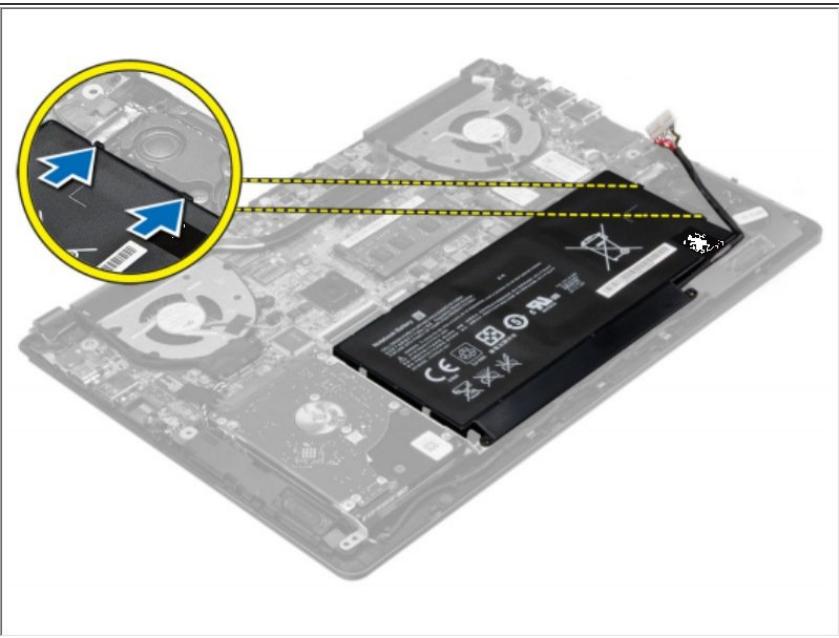

- Release the tabs that secure the battery in the battery bay.


Step 6 — Removing the Battery

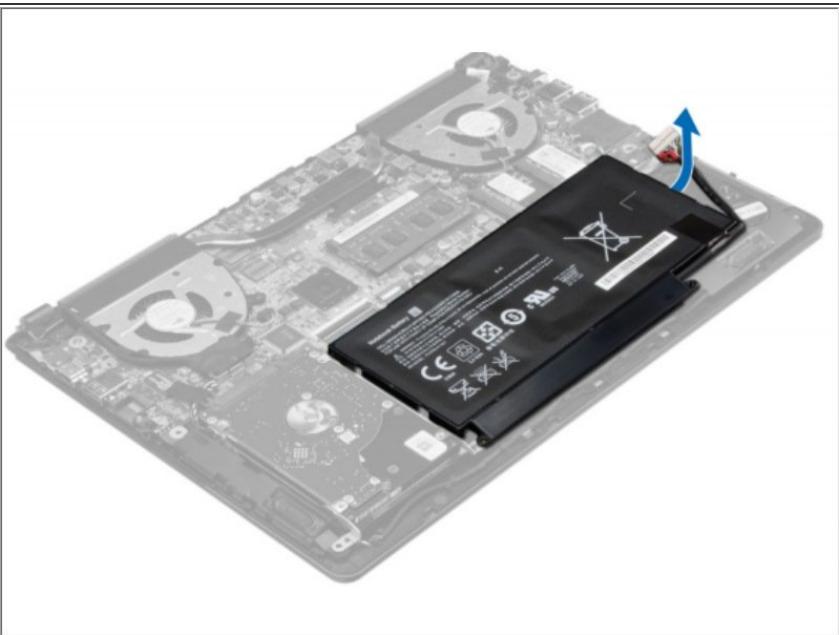

- Lift and remove the battery from the computer.

 If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 7 — Memory Module

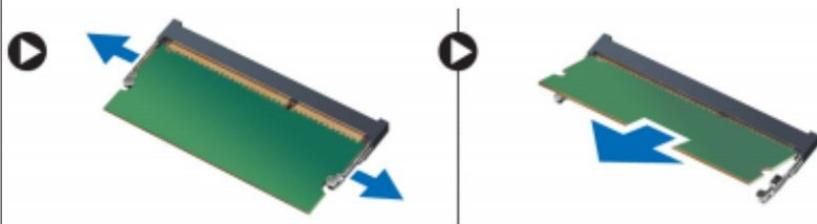

- Pry the securing clips away from the memory module until it pops up. Remove the memory module from its connector on the system board.

- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

To reassemble your device, follow these instructions in reverse order.