




# Dell Vostro 5560 Memory Module Replacement


Written By: Johnathan Hammond

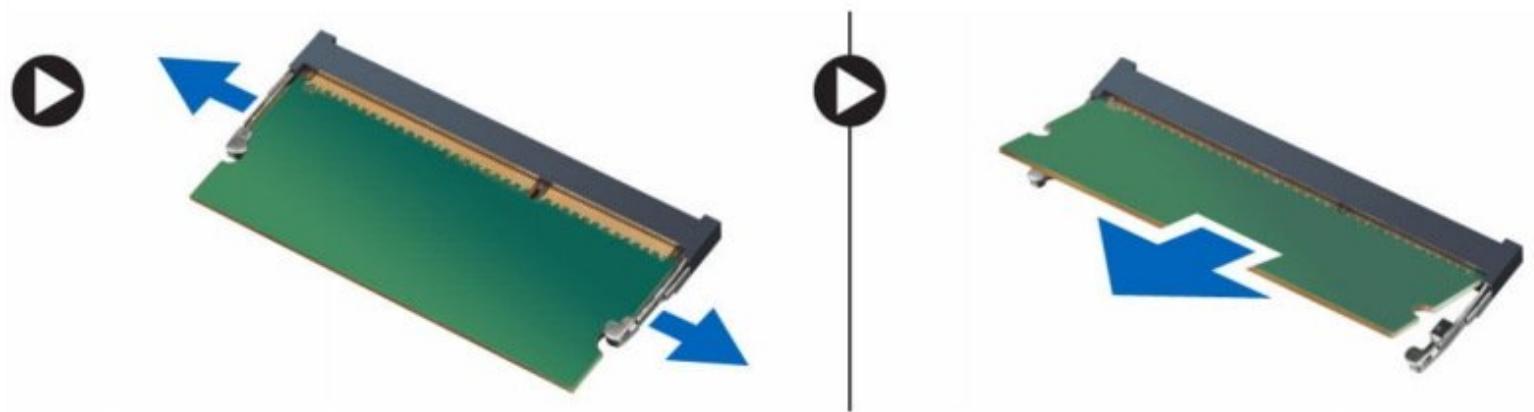

 **TOOLS:**

- Phillips #0 Screwdriver (1)

## Step 1 — Removing The Optical-Disk Drive

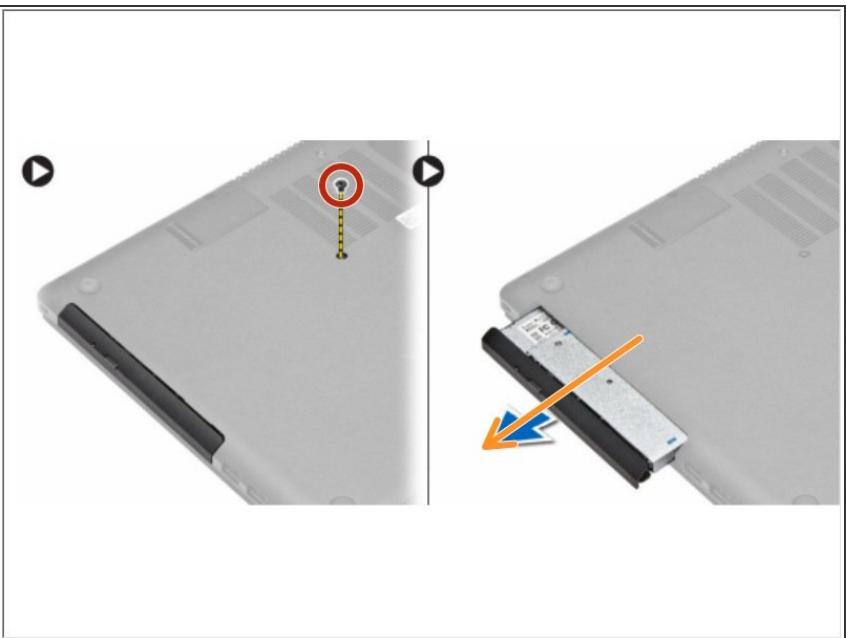


- Remove the screw that secures the base cover to the computer.

- Pull the optical-drive and remove from the computer.

 If this is all you are doing Follow Step In Reverse if not Go to Next Step.


## Step 2 — Replacing the Base Cover

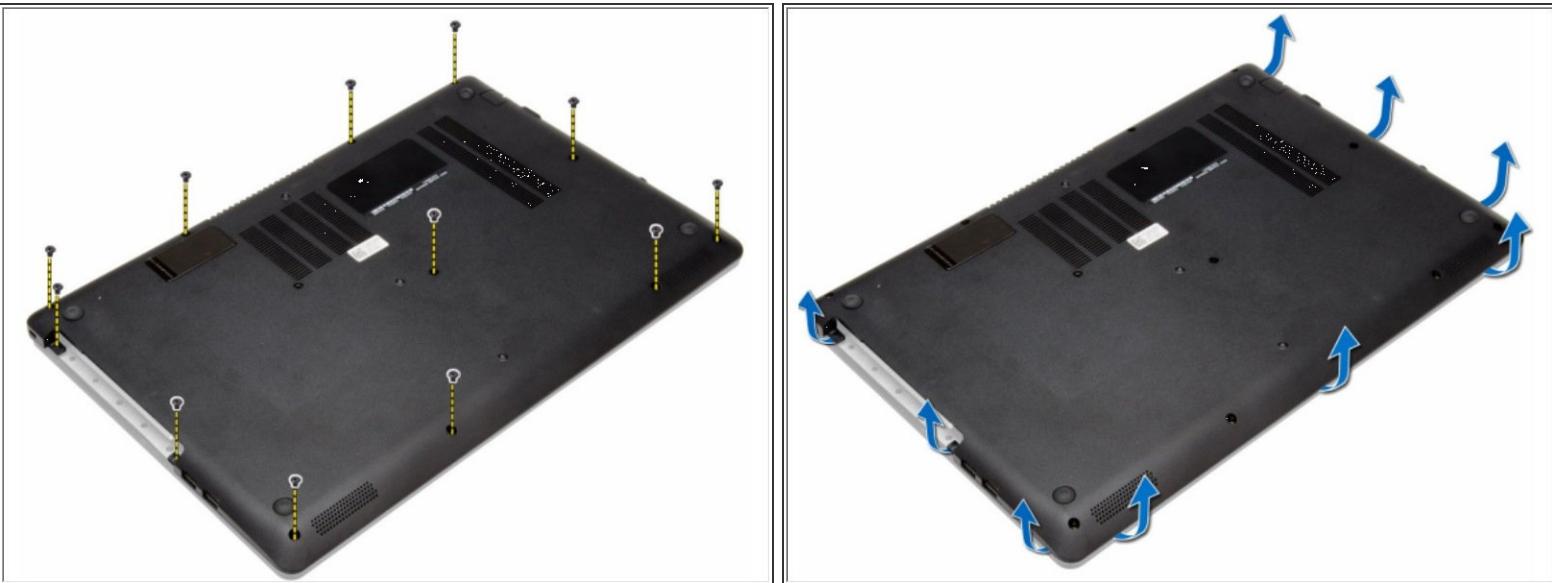

- Remove the screws that secure the base cover to the computer.
- Pry the base cover along the edges to loosen it. Lift and remove the base cover from the computer.

 If this is all you are doing Follow Step In Reverse if not Go to Next Step.


## Step 3 — Removing the Battery

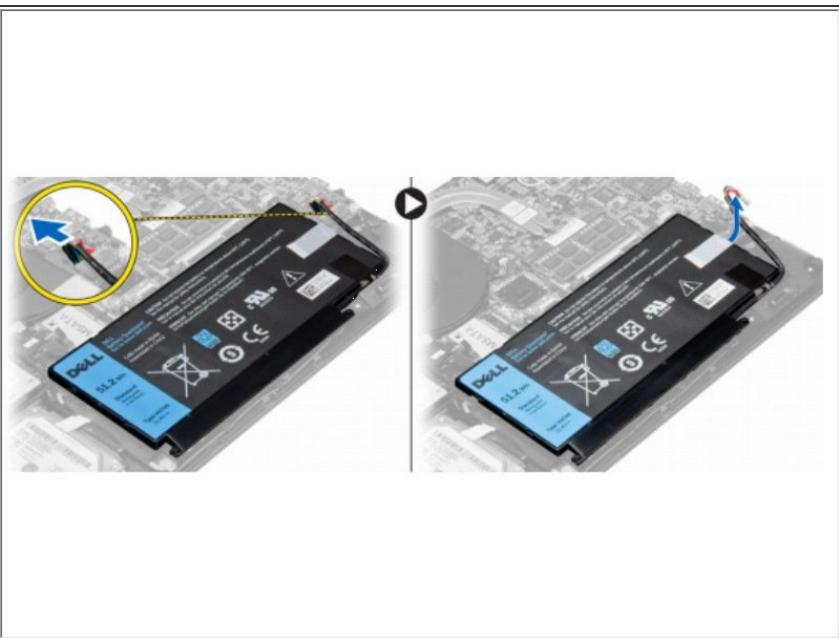

- Disconnect the battery cable from its connector on the system board.
- Lift and remove the battery from the computer.

↗ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 4 — Removing the Memory Module

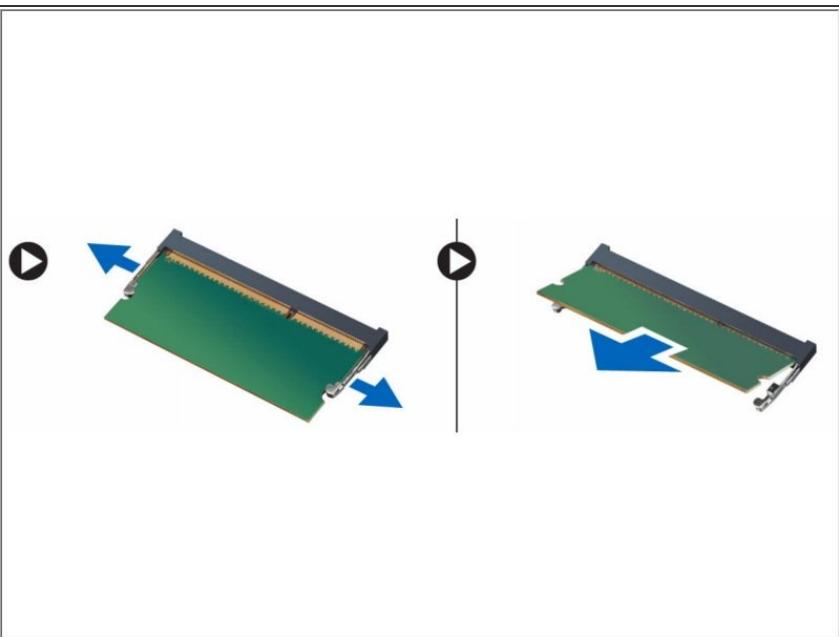

- Pry the securing clips away from the memory module until it pops-up. Remove the memory module from its connector on the system board.

↗ If this is all you are doing Follow Step In Reverse if not Go to Next Step.