



Hasee Z7M-i78172D1 CPU Fan Replacement

A replacement guide on how to replace the CPU fan inside the Hasee Z7M-i78172D1.

Written By: Jake Decker



**TOOLS:**

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

**PARTS:**

- [7mm Phillip's Head Screw](#) (18)
- [Plastic Back Panel](#) (1)
- [CPU Fan](#) (1)

Step 1 — Rear Panel




- Use a #0 Phillips head screwdriver and unscrew the sixteen 7mm screws on the back of the device.

Step 2



- Use a plastic opening tool to take off the back plastic panel.

Step 3 — CPU Fan

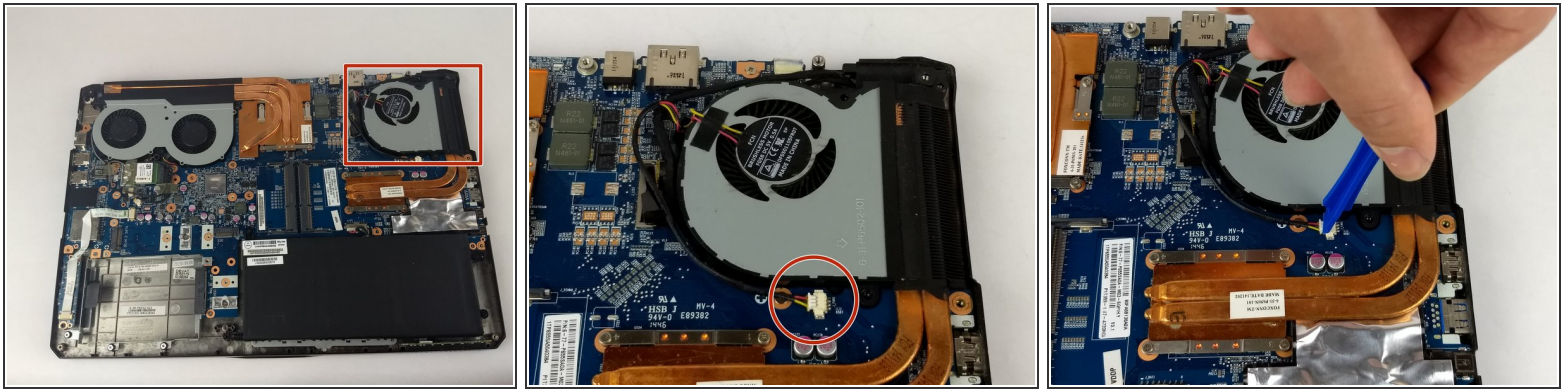

- To take out the CPU fan it is necessary to disconnect the CPU fan cable. Use a plastic opening tool to remove the cable.

Step 4



- Use a #0 Phillips head screwdriver to remove the two 7mm screws holding the fan to the motherboard.

Step 5



- Lift the CPU fan out and replace with the replacement fan.

To reassemble your device, follow these instructions in reverse order.