



How to Repair 1995-2001 Honda CRV Clock

Fix a broken dash clock.

Written By: Marc Zych



INTRODUCTION

Use this guide to fix a dashboard clock that doesn't light up. Credit goes to Eddie Carrara who made the YouTube video that documents the procedure.

[video: <http://youtu.be/1m8Ru04bVac>]

TOOLS:

- [Phillips #2 Screwdriver](#) (1)
- [Flathead Screwdriver](#) (1)
- [Soldering Iron](#) (1)

Step 1 — How to Repair 1995-2001 Honda CRV Clock



- Release the four hidden clips to remove the panel.
- This might require a lot of jiggling and prying.


 Be careful not to break the panel or the clips by prying too hard.

Step 2



- Remove the panel.

Step 3

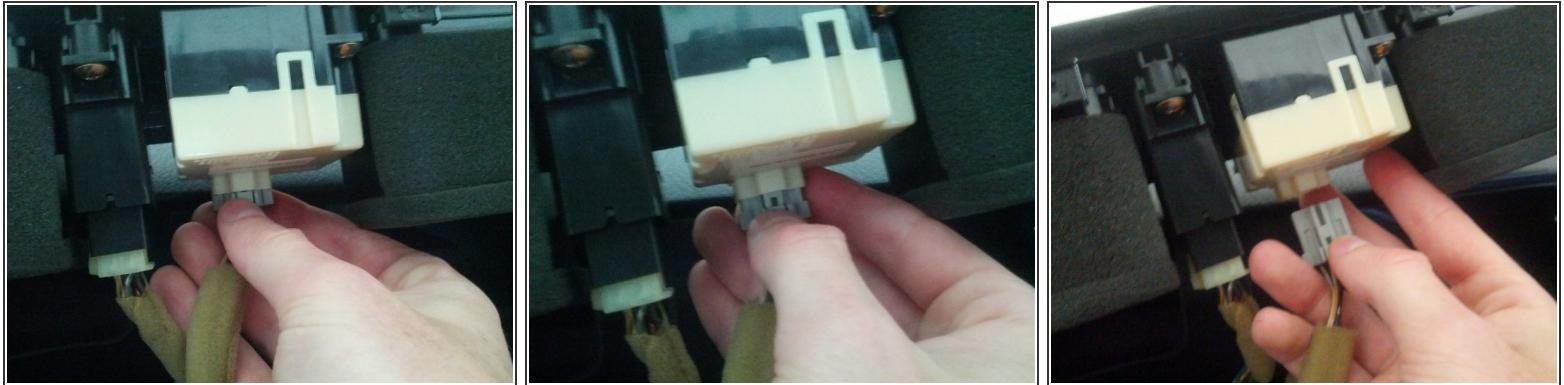

- Depress the tab and pull to remove the clock connector.

Step 4



- Depress the tab and pull to remove the hazard lights connector.

(i) The tab is very close to the air vent which makes it hard to reach.

Step 5




- Remove two screws to remove the clock assembly.

Step 6



- Unclip the four clips to remove the back cover.
- Get three prying tools and insert them into the clips to allow that side of the case to be removed.
- Unclip the last remaining clip to fully remove the case.

Step 7

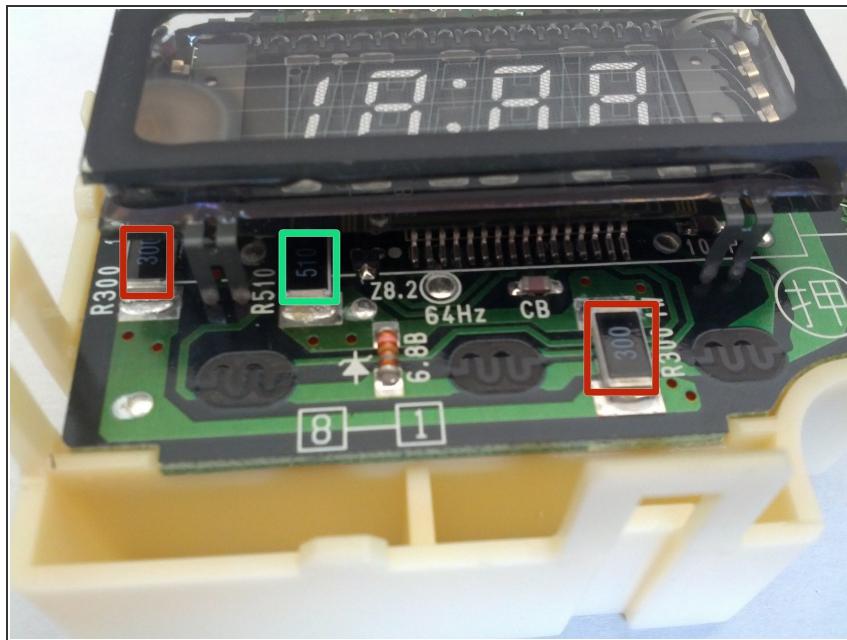

- Check the solder points on the resistors.
 - R300
 - R510
- Touch up any solder points that look like they may not have a good connection.

Step 8



- Test the repair before reassembling the clock assembly by plugging the electronics into the dash.
- Turn the ignition to the 2 position to get the clock to display the time.

To reassemble your device, follow these instructions in reverse order.