



Huawei Pronto LTE Display Screen Assembly Replacement

If you're having trouble seeing things on your device, the display screen may need to be replaced.

Written By: Crystal Edwards



INTRODUCTION

The display screen is a vital part of the device. Seeing what you're doing on your phone helps to navigate each move you make in the correct order.

TOOLS:

- [iFixit Opening Tools \(1\)](#)
- [JIS #000 Screwdriver \(1\)](#)
- [ESD Safe Tweezers Blunt Nose \(1\)](#)
- [Metal Spudger \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Battery



- Remove the back cover of your Huawei Pronto LTE using an opening tool.
- Lift the back cover off of the device after the four corners are unlatched.

Step 2




- Remove the 15 screws on the back of the device using a Phillips #000 screwdriver.
- Hold the device in place while you are doing this step.
- Lift the inner cover gently by using a spudger.

Step 3



- Detach the yellow latches along the sides to remove the motherboard.

Step 4

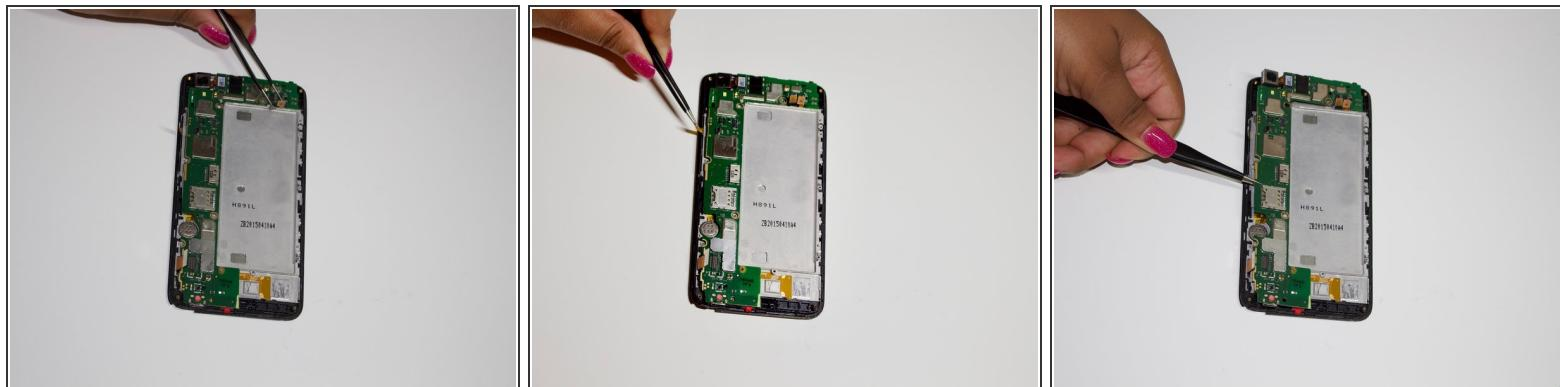

! Ensure that all latches are detached and that there are no extra screws to avoid damaging the motherboard.


- Use tweezers to gently remove the motherboard from the device.

Step 5



- The battery should be revealed once the motherboard is removed.
- Lift the battery from the top left corner.

Step 6 — Screen Assembly

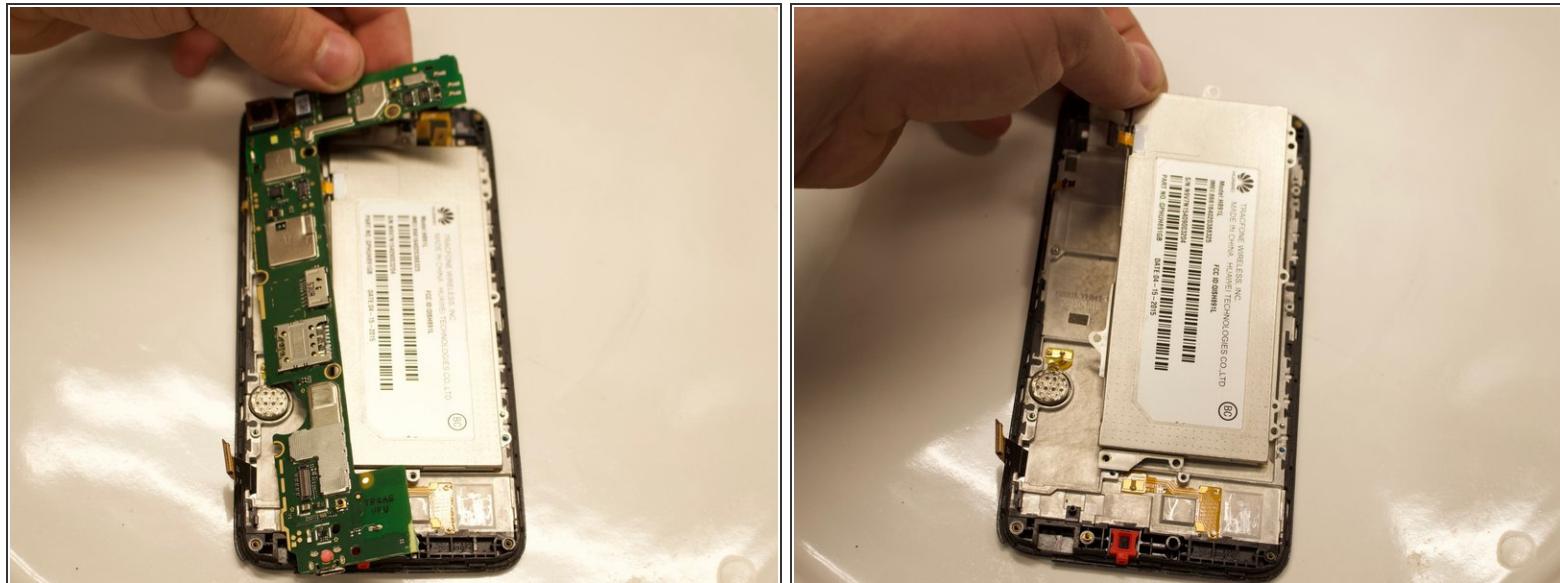

- Remove the motherboard. Refer to the Motherboard Replacement Guide.
- Remove the battery.

Step 7



- Once the battery is removed the screen will be visible.

To reassemble your device, follow these instructions in reverse order.