



Lasko 2002W Motor Replacement

Use this as a repair guide to replace the motor in the Lasko 2002W personal fan.

Written By: elsa



INTRODUCTION

The Lasko 2002W fan motor can be replaced by the following guide.

TOOLS:

- Phillips #2 Screwdriver (1)

Step 1 — Remove cover



- Remove the front cage from the fan, exposing the screws.

Step 2 — Remove screws



- Remove the 3 screws holding the fan on to the motor housing using a 3/16" philips head screw driver. The


length of the screwdriver does not matter.

Step 3 — Remove motor screws



- Remove the screws holding the motor onto the fan using the same 3/16" phillips head screwdriver. There are two screws.
- Once removed, remove the metal part the screws were holding to the motor.

Step 4 — Remove old motor.

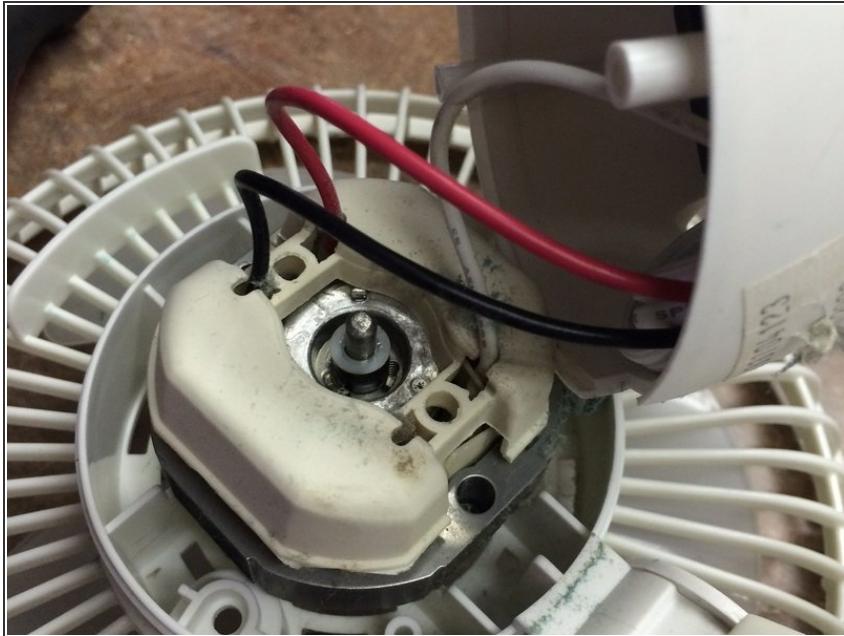

- Remove the old motor from the fan. No tools are required. The motor can simply be pulled out.

Step 5 — Place new motor in motor housing.



- Now that the old motor is removed, a new motor can be placed in the motor housing.

To reassemble your device, follow these instructions in reverse order.