




# Lenovo IdeaPad 310 Touch-15ISK Fan Replacement

This guide will show you how to disassemble your laptop in order to replace the fan.



Written By: msegundo23

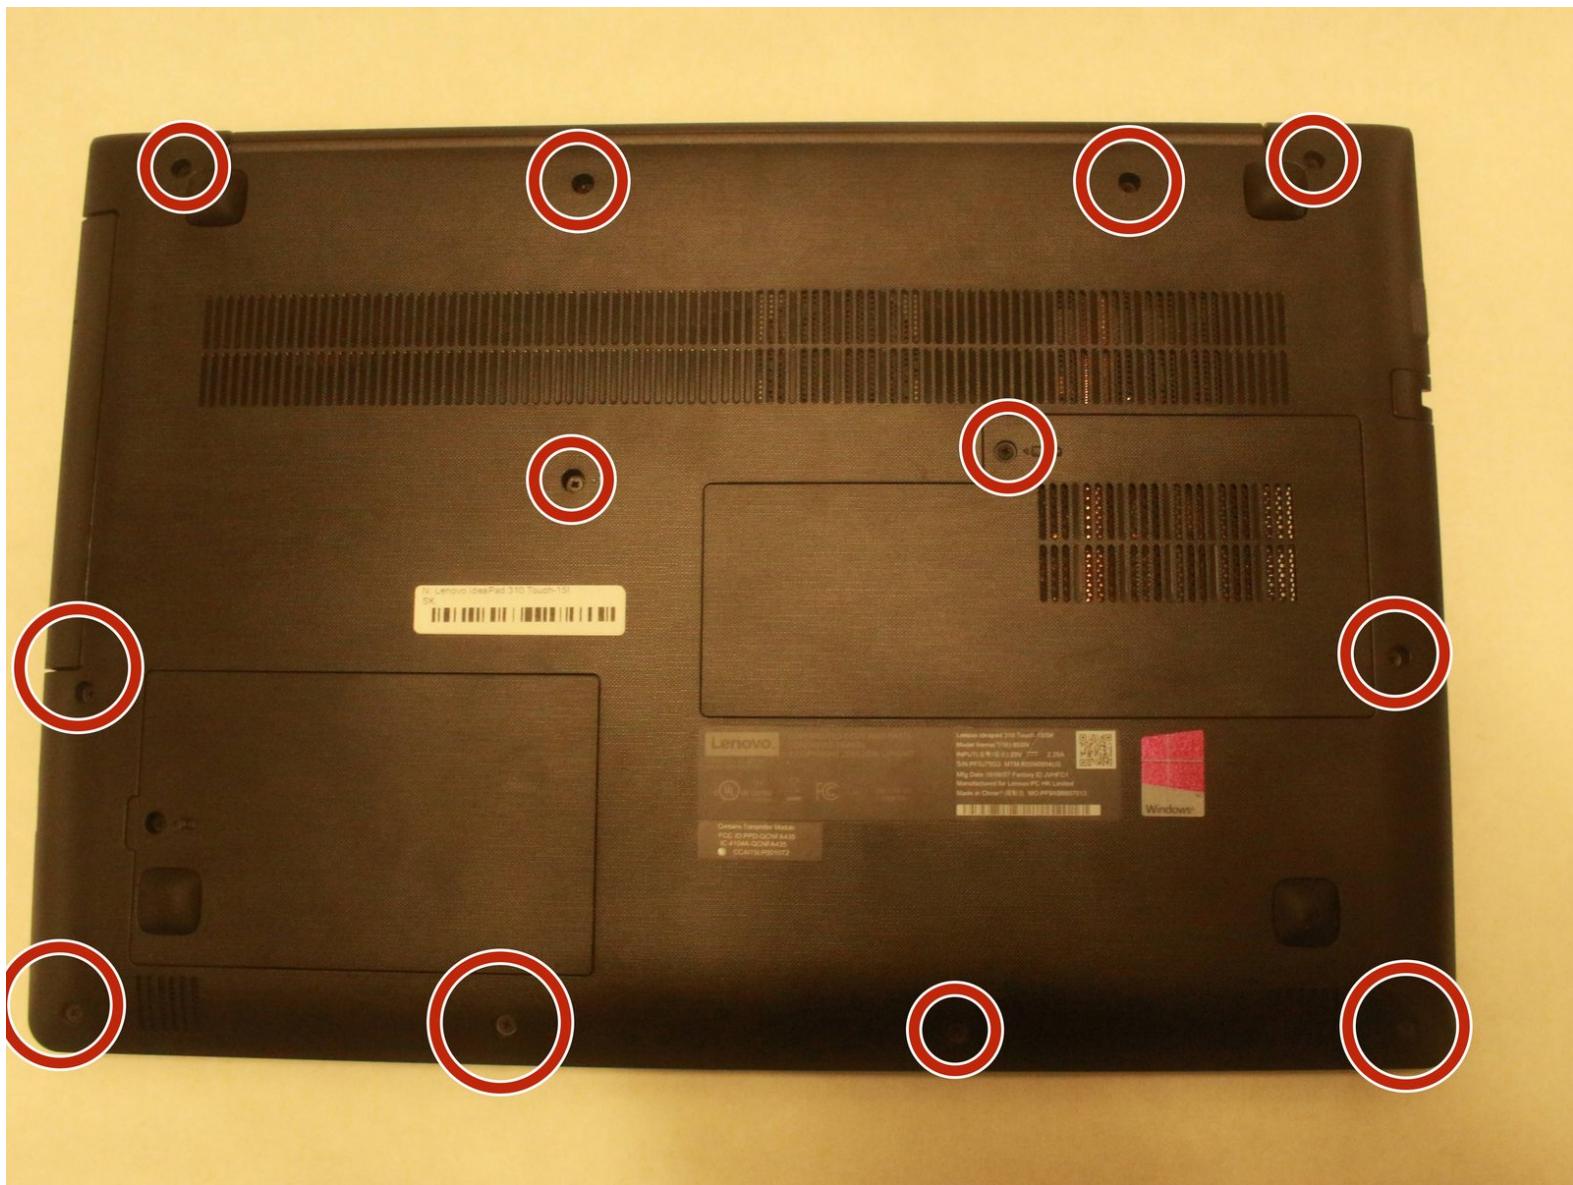

 **TOOLS:**


- **Phillips #0 Screwdriver** (1)
- **Spudger** (1)
- **Tweezers** (1)

## Step 1 — Fan

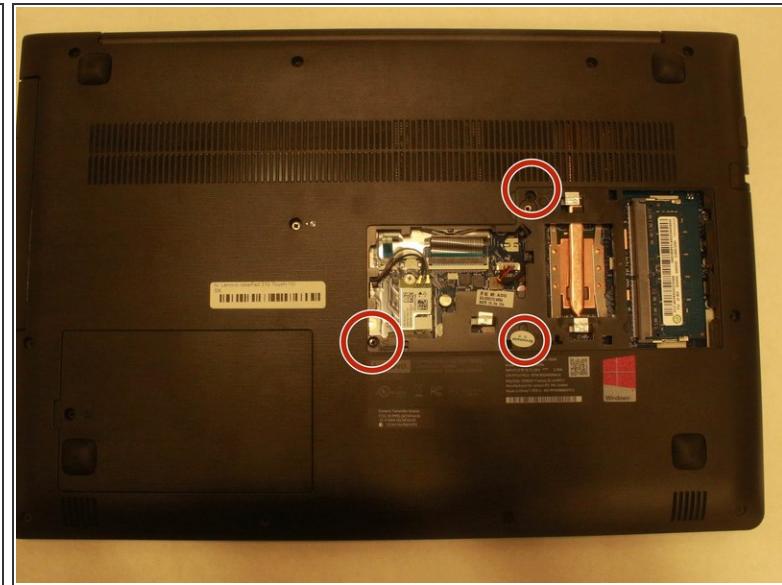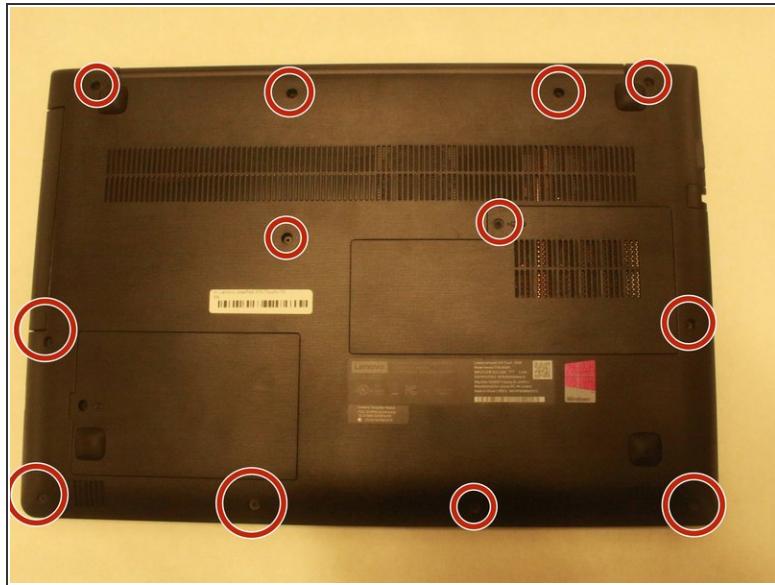



- Flip laptop over
- Remove 13 screws to remove bottom. Size: Phillips #0
- Remove extra 3 screws from RAM port. Size: Phillips #0

## Step 2

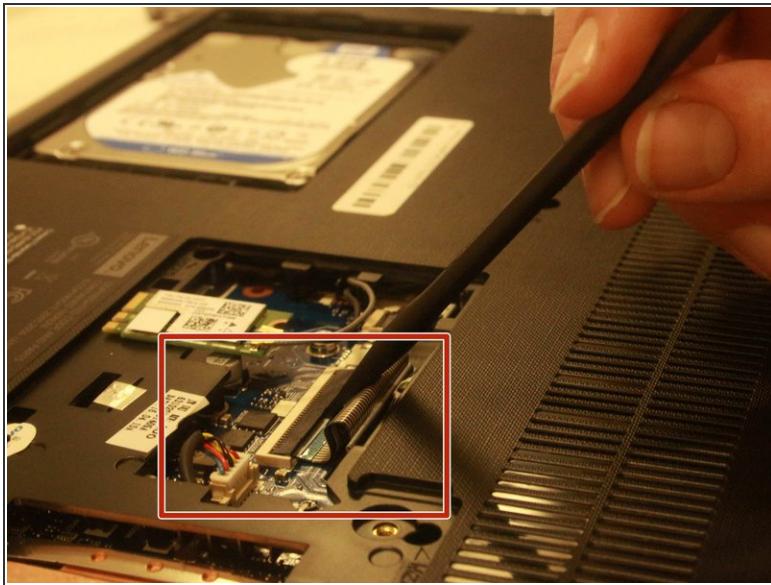


- Disconnect keyboard and touchpad
- Remove CD drive

## Step 3

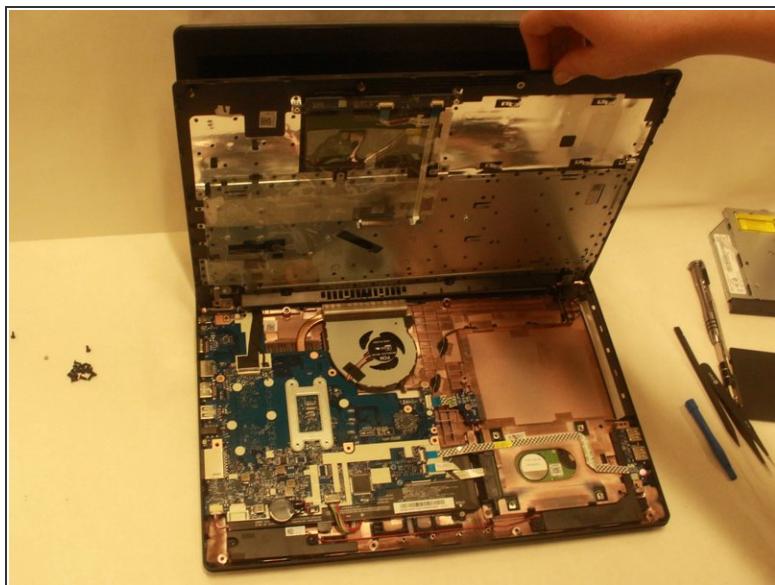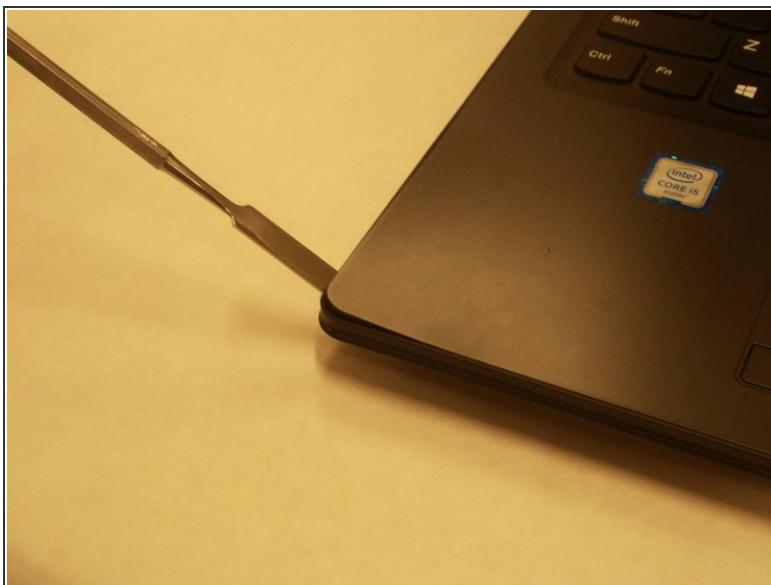


- Flip laptop back over
- Using a plastic spudger, pry between the keyboard panel and bottom panel on all 4 sides.

## Step 4

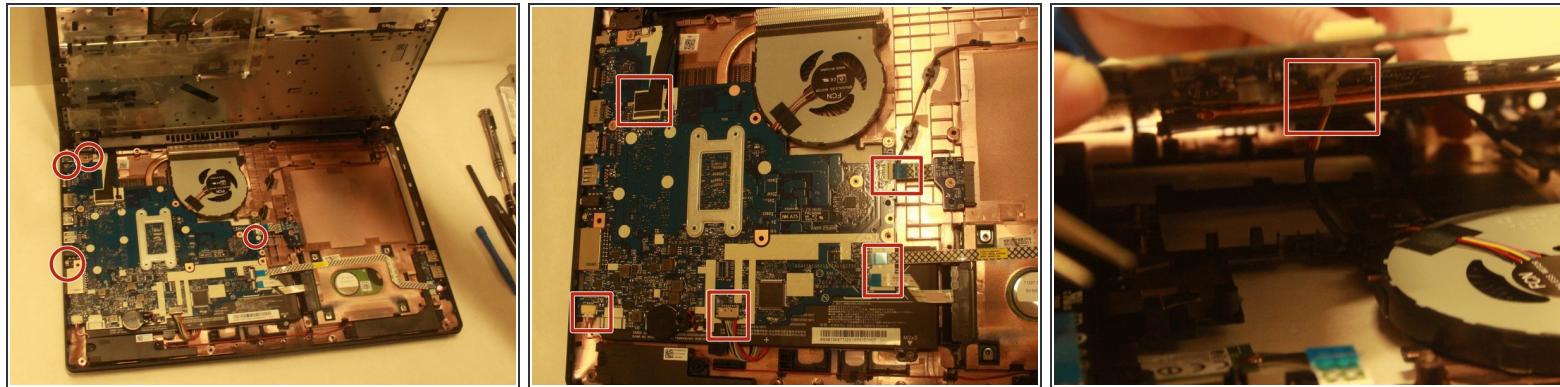

- Remove 4 screws and tabs holding motherboard
- *i* Be sure to disconnect fan tab on the bottom of the motherboard

## Step 5

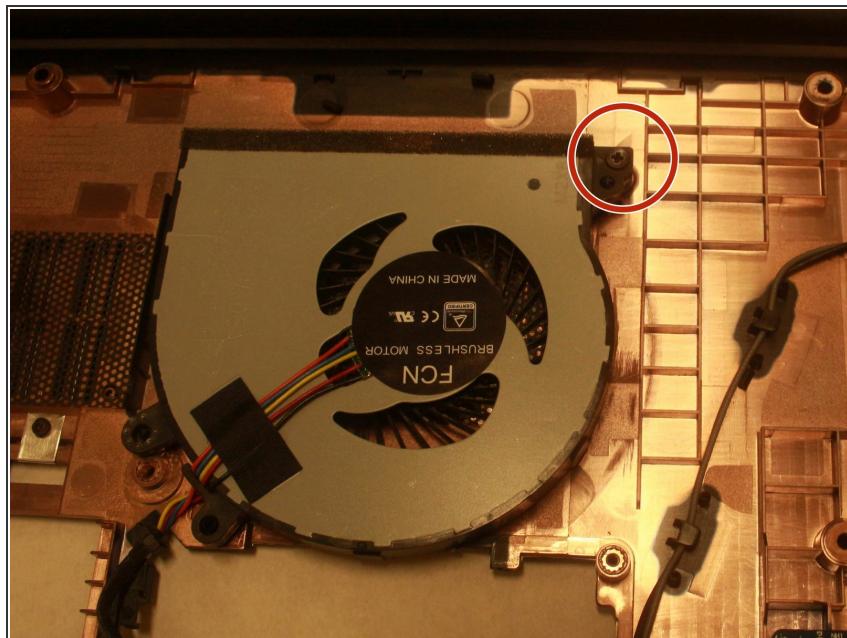

- Remove 1 fan screw. Size: Phillips #0

To reassemble your device, follow these instructions in reverse order.