




# Lenovo Yoga 2 11" 20428 Hard Drive Replacement

This guide will show how to properly remove and replace the hard drive of a Lenovo Yoga 2 11" 20428.

Written By: Joshua Thomas Tyler

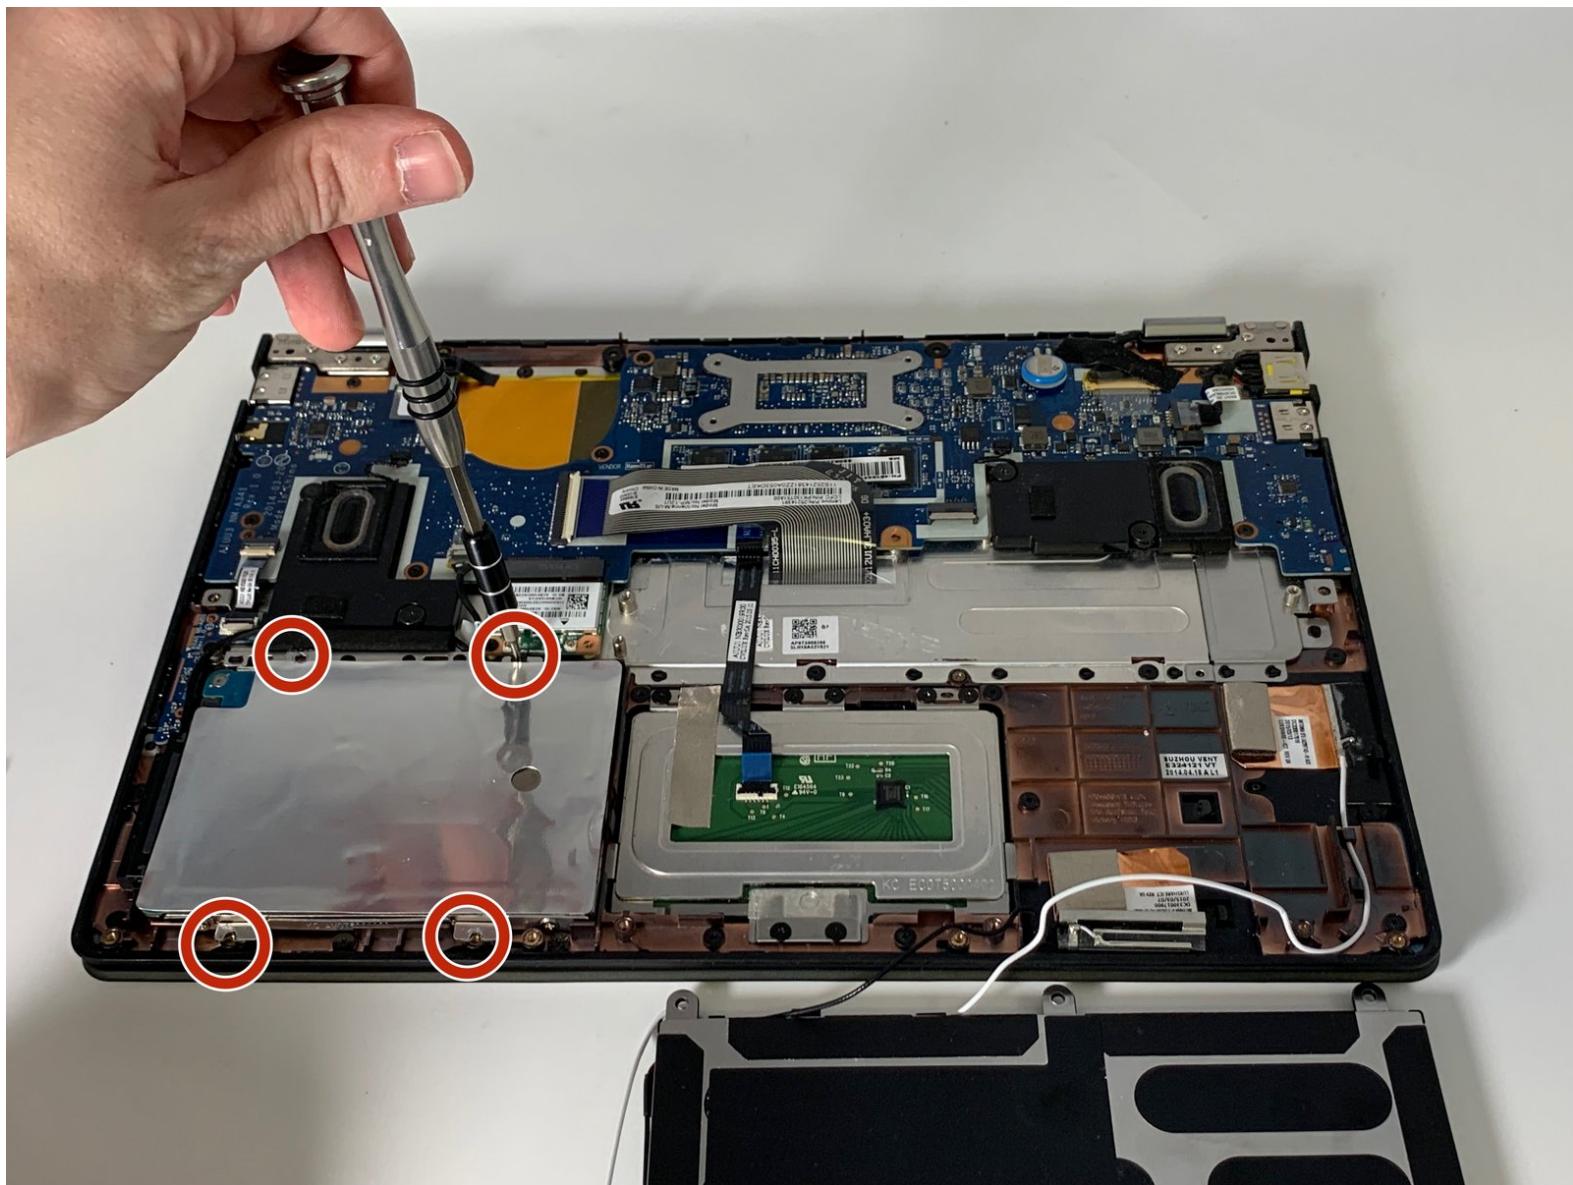

This document was generated on 2019-12-28 08:17:53 AM (MST).


## INTRODUCTION

This guide will properly show how to remove and replace the hard drive component for a Lenovo Yoga 2 11" 20428. When removing the hard drive be sure to have the laptop turned off and the battery disconnected.

### TOOLS:


- [T4 Torx Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)

## Step 1 — Back Panel

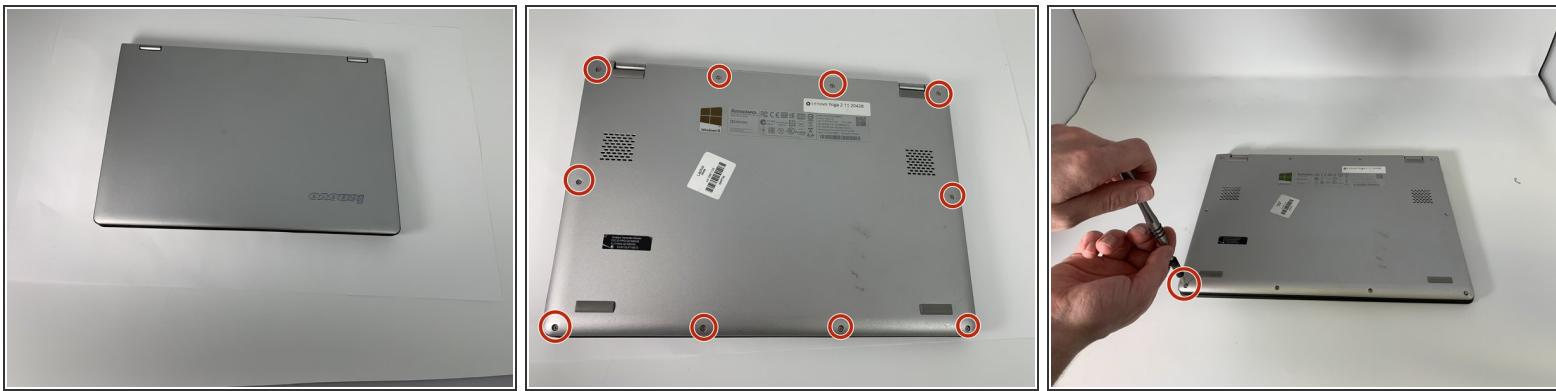

- Flip the computer over so the bottom is facing up.
- Remove the ten 6mm screws with a T4 Torx security screwdriver.


## Step 2

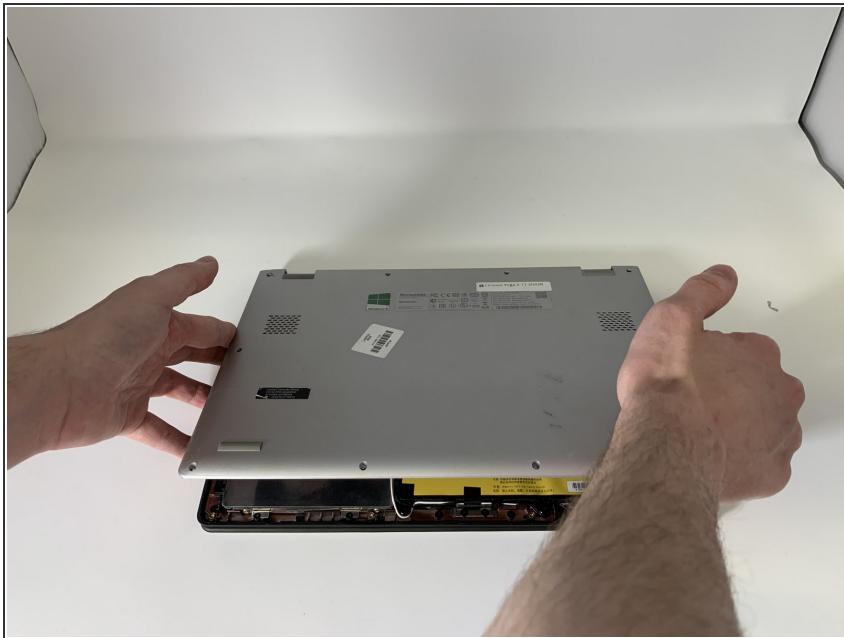

- Carefully remove the back panel by gently prying the panel from the front to the back.

**⚠** Take care not to pull any wires or crack the outer shell.

## Step 3 — Battery

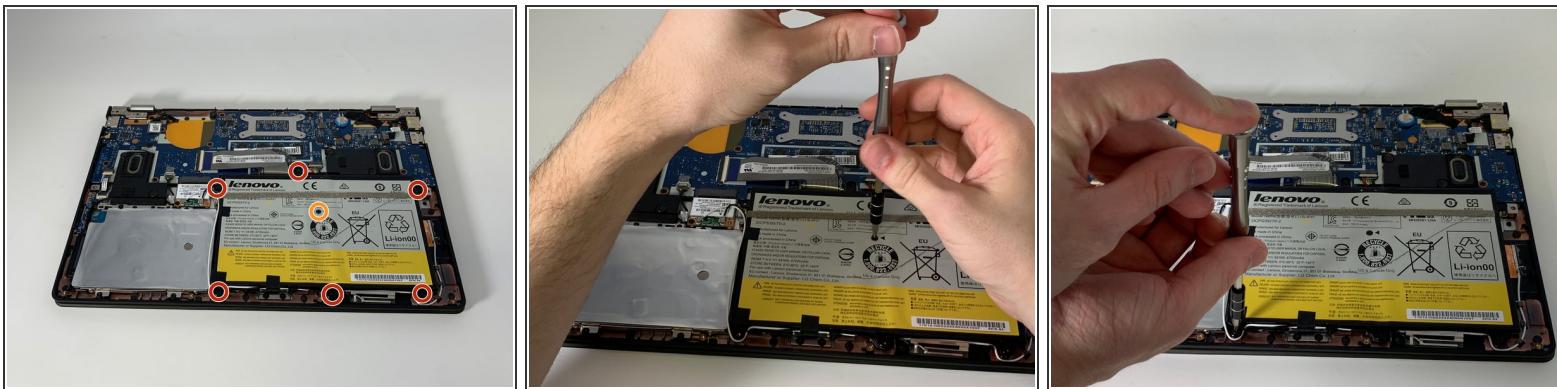



- Remove six 3.3 mm Phillips #00 screws around the perimeter of the battery.
- Remove one 6.75 mm Phillips #00 screw from the center of the battery.

## Step 4



- Remove the pieces of tape securing the bluetooth/wifi antenna.


## Step 5

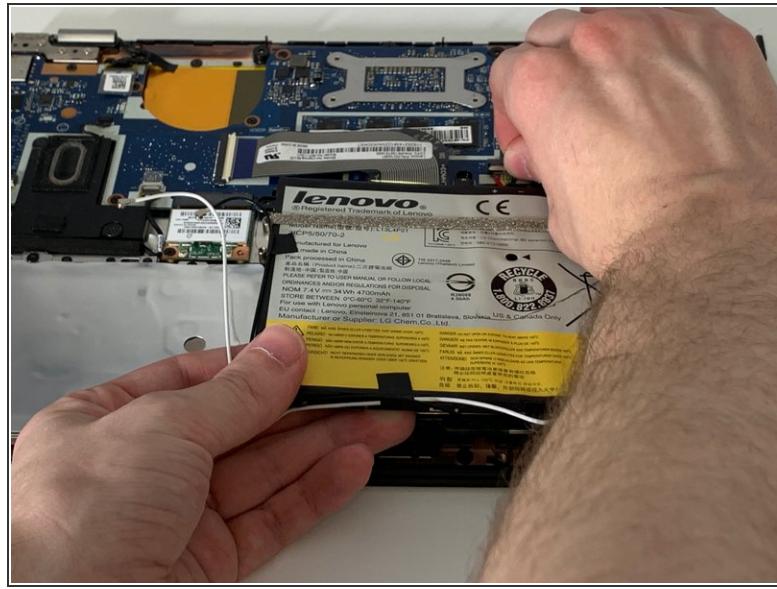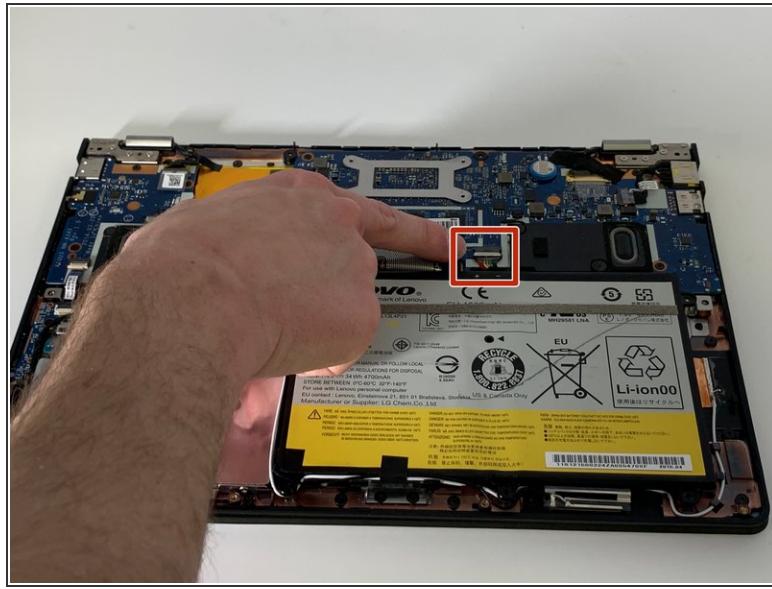

- Grip the base of the connector with your fingers or pliers, and gently pull the connector straight back towards you to remove it.

**⚠** If possible try not to pull the connector out by the wires, as this can damage the connector.

## Step 6

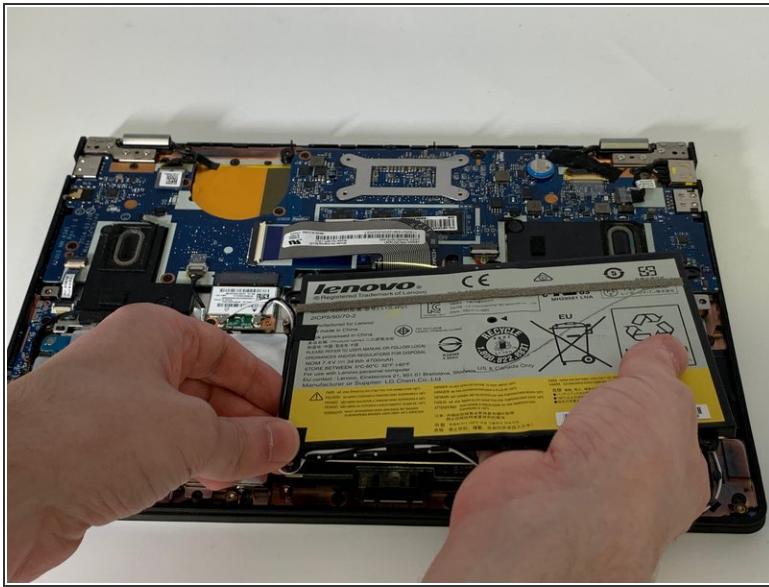

- Carefully remove the battery from the laptop.


**⚠** Take care not to pull out the Bluetooth antenna while removing the battery.

## Step 7 — Hard Drive



- Remove four 3.3 mm Phillips #00 screws securing the hard drive to the panel.

## Step 8

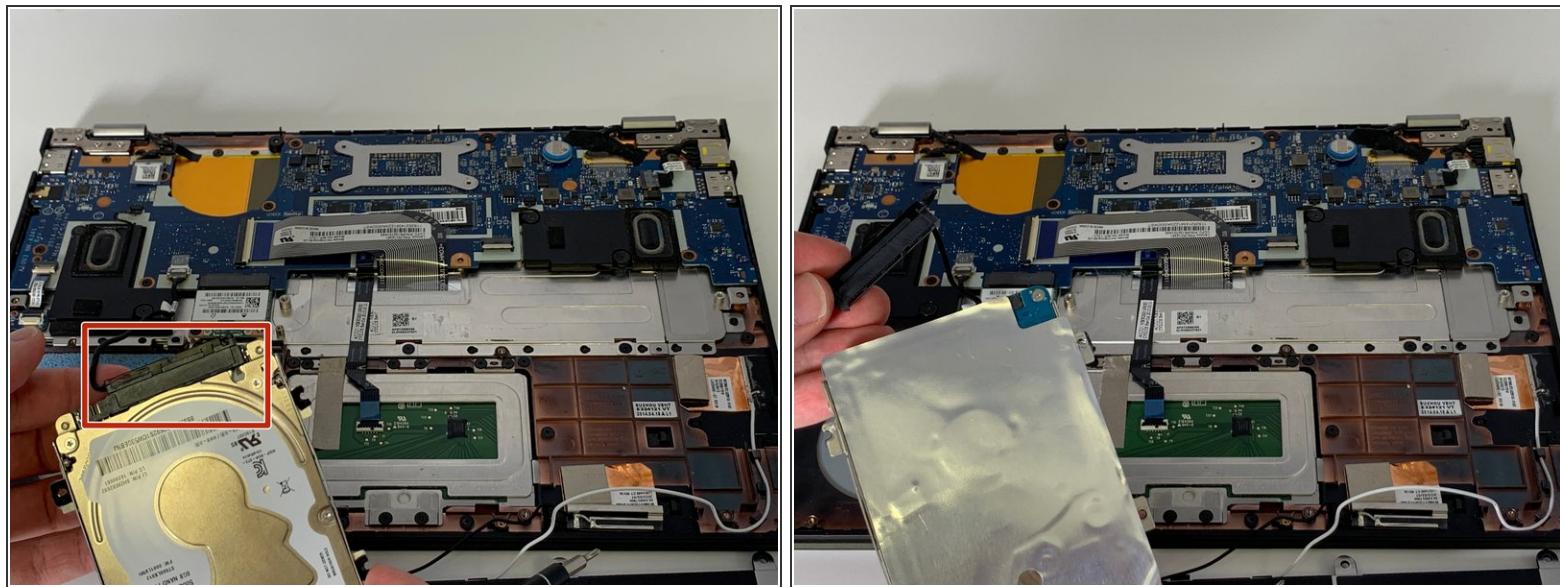

- Lift the hard drive up and turn it over and remove the connection.

To reassemble your device, follow these instructions in reverse order.