




Lenovo Yoga 3 14 USB Port Replacement

Potential issues with the USB port for Lenovo Yoga 3 Pro is that it does not register devices that have been plugged into it.

Written By: Matthew Victores

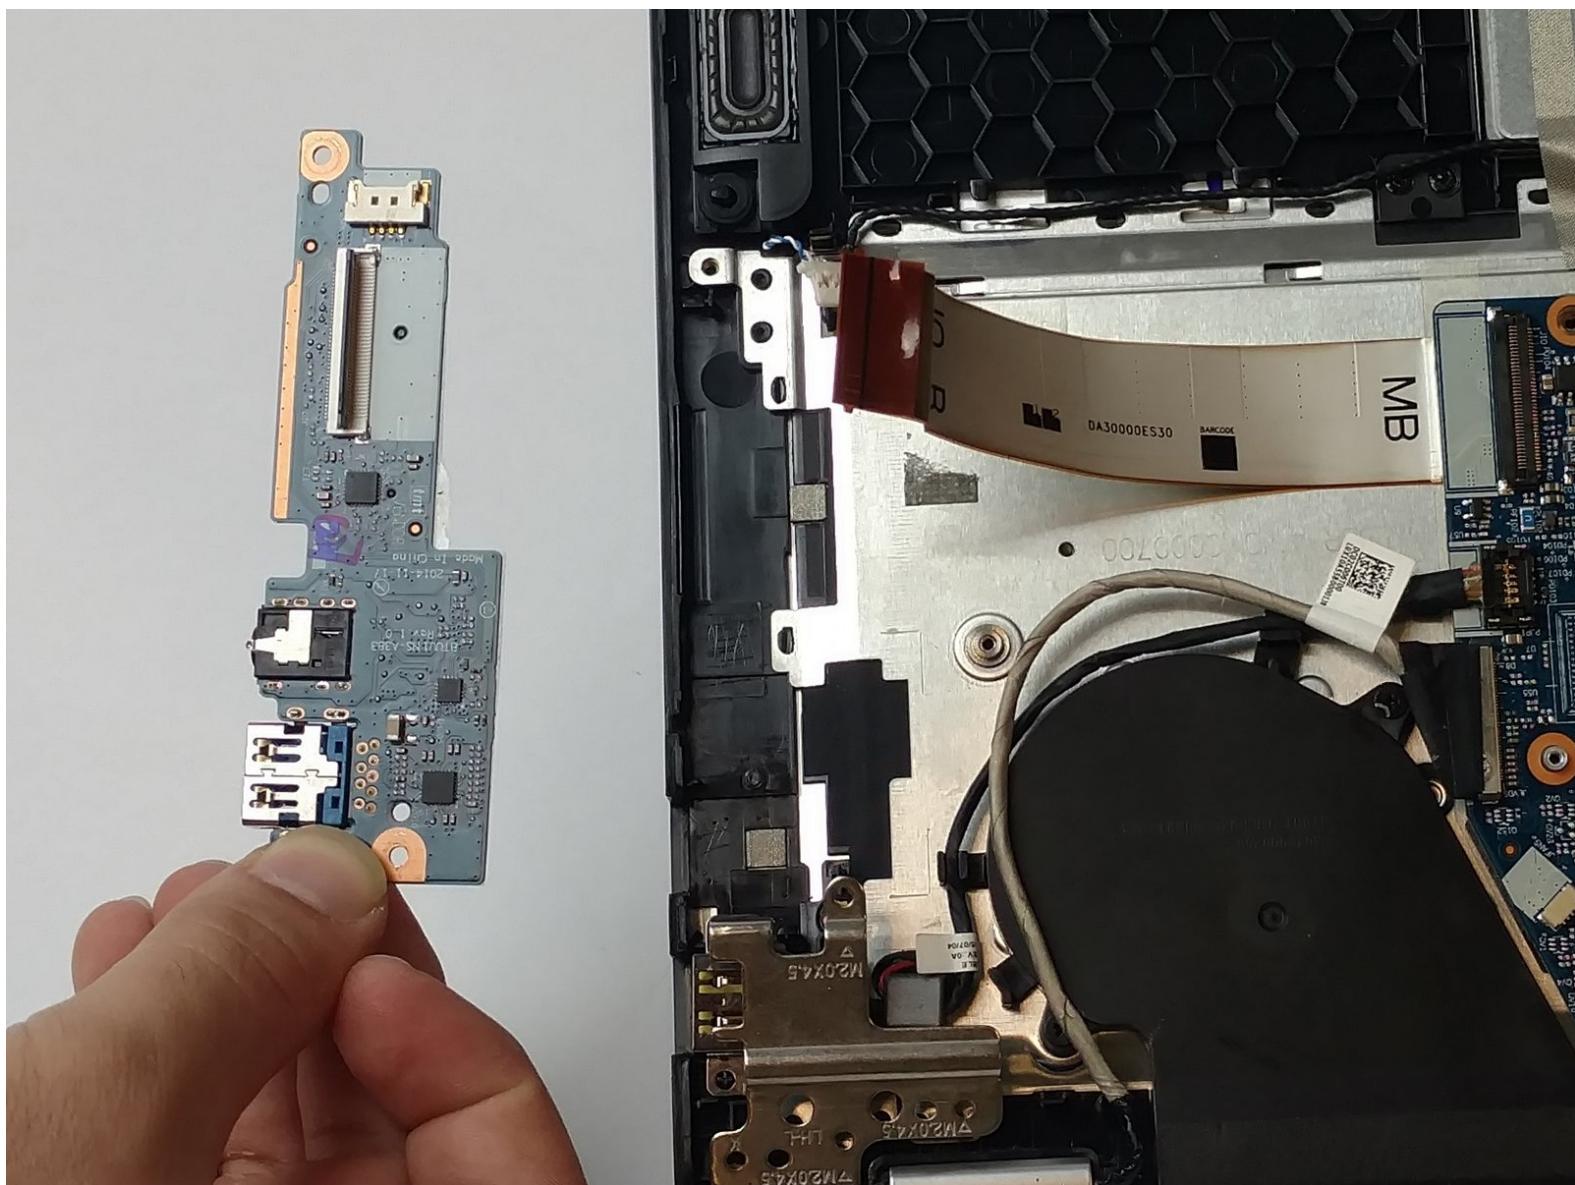

INTRODUCTION

The tools needed to replace the USB Port in the Lenovo Yoga 3 Pro are T5 Torx screwdriver, PH0, and a spudger.

TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)
- [T5 Torx Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Tweezers \(1\)](#)

Step 1 — Back Case



- Remove the eleven 6mm T5 Torx screws from the back case.

Step 2



- Insert the plastic opening tool into the long side of the case backing and slide it the entire length of the laptop.
- Gently lift the backing off the laptop.

Step 3 — Battery




- Remove the four 3mm PH#0 screws surrounding the battery.

Step 4





- Gently lift the battery and use the plastic opening tool to remove the battery's connection to the laptop.

Step 5 — USB Port

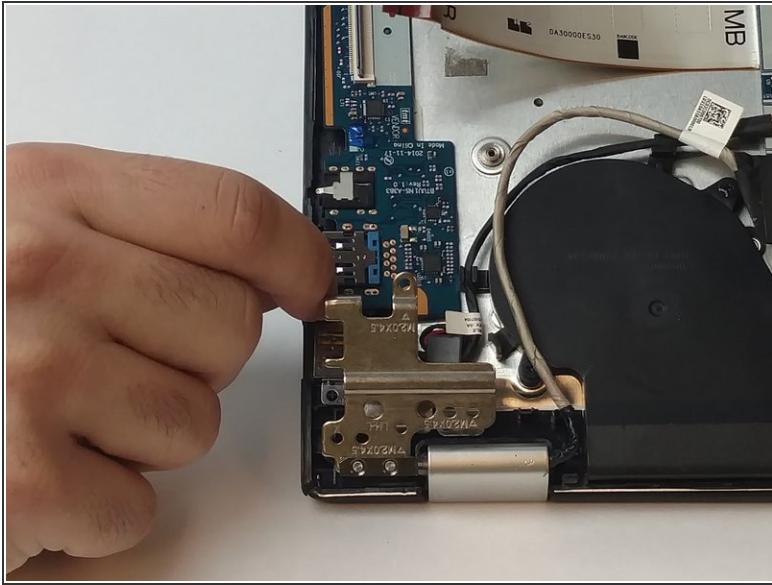


- Take out the 3, 3mm screws from the left hinge using the PH0 head.
- Remove the 1, 4mm screw that connects the hinge to the USB port.
- Carefully lift the hinge enough to separate it from the USB port.

Step 6

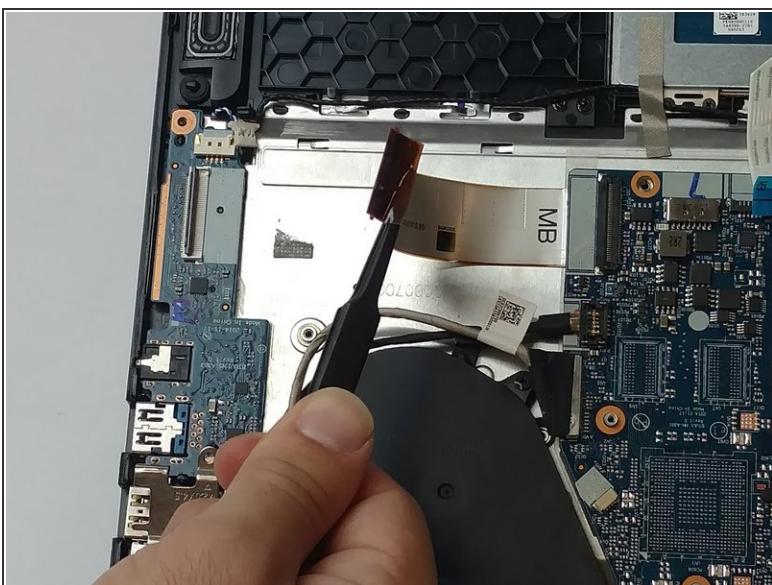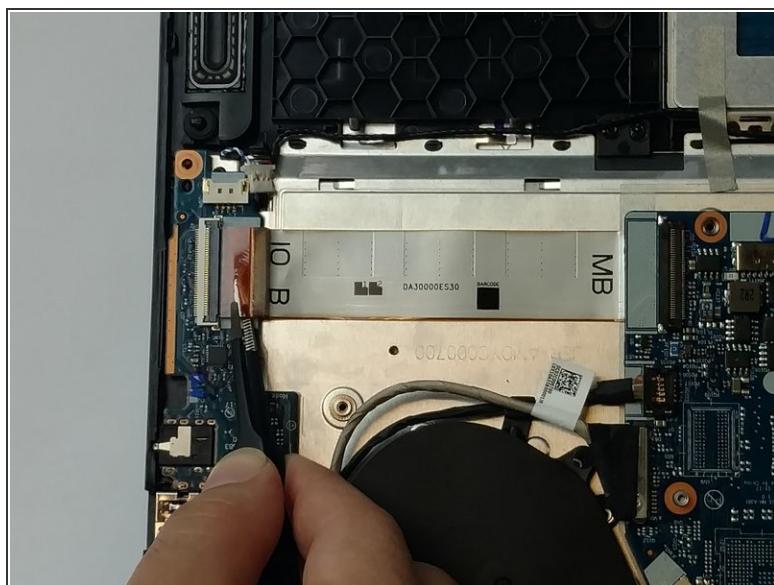

- Using the tweezers, carefully lift the black clip and remove the electrical ribbon.

Step 7

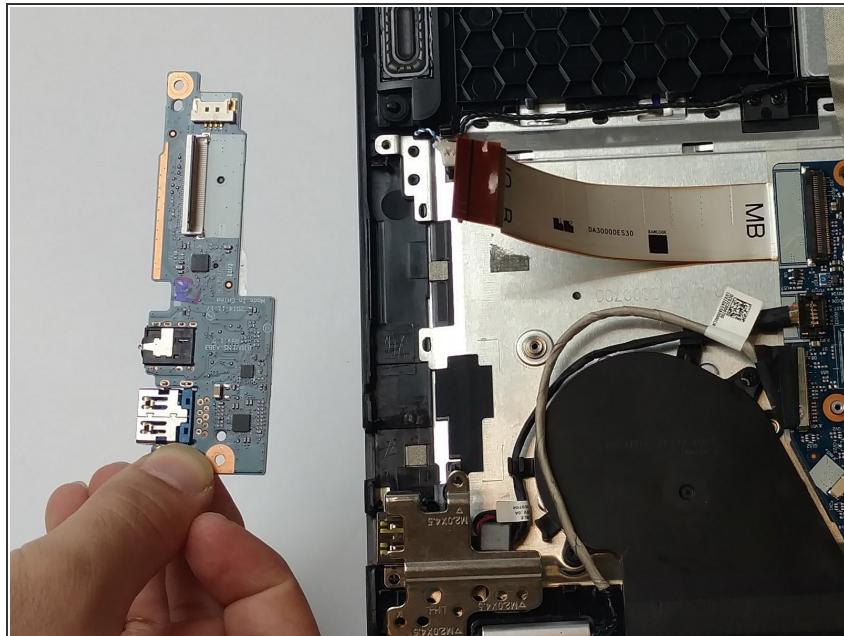

- The USB port is held in place by plastic pegs. Gently lift up to remove the USB port from the laptop.

To reassemble your device, follow these instructions in reverse order.