



TABLE A-FEATURES

EQUIPMENT		EQUIPMENT OR CIRCUIT DATA							SD EQUIVALENT		
DESCRIPTION	REF NOTE	RAT-ING	LIST OR GROUP	QTY	EQUIPMENT OR CIRCUIT	L/G OR FIG	WRG	APP	SCHEMATIC	FIG	OPT
WIRING AND APPARATUS FOR A CONNECTORIZED CABLE ASSEMBLY (E/W 963T CONN)			1 THRU 101								
WIRING AND APPARATUS FOR A CONNECTORIZED CABLE ASSEMBLY (E/W AMP CONN) FE/RA:NONE DA EFF:11/25/96		DA	1A THRU 101A								
END OF TABLE-A											

SEE PROPRIETARY NOTICE ON SHEET ONE

XT13


5ESS SWITCHING EQUIPMENT  
CABLE ASSEMBLIES  
FOR  
MSCU2 AND MSPU3

DWG SIZE C2 ISSUE 12

ED5D585-22

LUCENT TECHNOLOGIES INC ED5D585-22

SHEET A2 OF 15

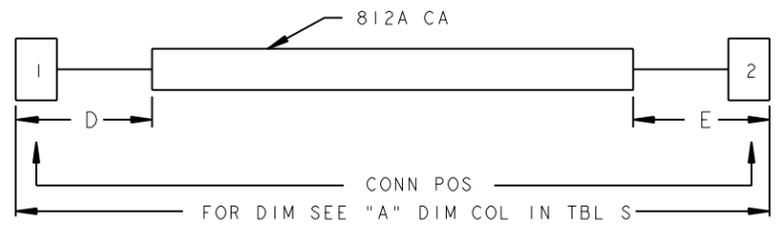


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.  
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK.A  
 (SEE TABLE S)

GROUP	CABLE CODE	"A" DIM CM FT-IN		"A" DIM TOLERANCE CM IN		LENGTH FROM CABLE BUTT TO FRONT OF CONN				
						"D" DIM		"E" DIM		SK
						CM	FT-IN	CM	FT-IN	
1, 1A	812A	201	[6-07]	±3	[±1 1/8]	3.8	[0-1 1/2]	3.8	[0-1 1/2]	A
2, 2A		193	[6-04]	±3	[±1 1/8]					
3, 3A		216	[7-01]	±3	[±1 1/4]					
4, 4A		176	[5-09]	±3	[±1]					
5, 5A		260	[8-06]	±4	[±1 1/2]					
6, 6A		297	[9-09]	±4	[±1 3/4]					
7, 7A		297	[9-09]	±4	[±1 3/4]					
8, 8A		260	[8-06]	±4	[±1 1/2]					
9, 9A		345	[11-04]	±5	[±2]					
10, 10A		389	[12-09]	±6	[±2 1/4]					
11, 11A		389	[12-09]	±6	[±2 1/4]					
12, 12A		348	[11-05]	±5	[±2]					
13, 13A		156	[5-01]	±2	[±7/8]					
14, 14A		125	[4-01]	±2	[±3/4]					
15, 15A		183	[6-00]	±3	[±1]					
16, 16A		198	[6-06]	±3	[±1 1/8]					
17, 17A		287	[9-05]	±4	[±1 3/4]					
18, 18A		273	[8-11]	±4	[±1 5/8]					
19, 19A		273	[8-11]	±4	[±1 5/8]					
20, 20A		287	[9-05]	±4	[±1 3/4]					
21, 21A		377	[12-04]	±6	[±2 1/4]					

TITLE				
INTERCABINET CABLE ASSEMBLIES				
THIRD ANGLE PROJECTION				
LUCENT TECHNOLOGIES - PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS				
Lucent Technologies, Inc.	ED5D585-22	SHEET C1	ISSUE 12	DWG SIZE C2/AIR

ED5D585-22

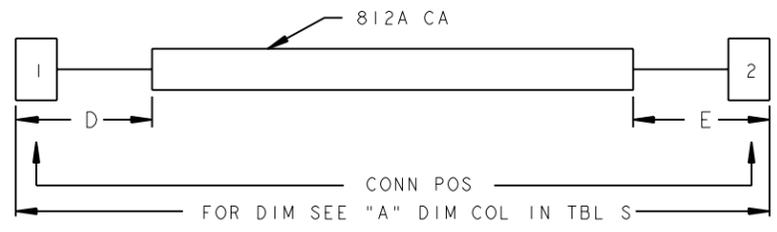


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.  
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK.A  
 (SEE TABLE S)

GROUP	CABLE CODE	"A" DIM		"A" DIM TOLERANCE		LENGTH FROM CABLE BUTT TO FRONT OF CONN				SK
						"D" DIM		"E" DIM		
						CM	FT-IN	CM	FT-IN	
22, 22A	812A	360	[11-10]	±5	[±2 1/8]	3.8	[0-1 1/2]	3.8	[0-1 1/2]	A
23, 23A		360	[11-10]	±5	[±2 1/8]					
24, 24A		375	[12-04]	±6	[±2 1/4]					
25, 25A		148	[4-10]	±2	[±7/8]					
26, 26A		168	[5-06]	±3	[±1]					
27, 27A		229	[7-06]	±3	[±1 3/8]					
28, 28A		198	[6-06]	±3	[±1 1/8]					
29, 29A		193	[6-04]	±3	[±1 1/8]					
30, 30A		224	[7-04]	±3	[±1 3/8]					
31, 31A		313	[10-03]	±5	[±1 7/8]					
32, 32A		273	[8-11]	±4	[±1 5/8]					
33, 33A		273	[8-11]	±4	[±1 5/8]					
34, 34A		313	[10-03]	±5	[±1 7/8]					
35, 35A		401	[13-02]	±6	[±2 3/8]					
36, 36A		348	[11-05]	±5	[±2]					
37, 37A		328	[10-09]	±5	[±2]					
38, 38A		368	[12-01]	±6	[±2 1/8]					
39, 39A		447	[14-08]	±7	[±2 5/8]					
40, 40A		406	[13-04]	±6	[±2 3/8]					
41, 41A		401	[13-02]	±6	[±2 3/8]					
42, 42A		447	[14-08]	±7	[±2 5/8]					

TITLE					INTERCABINET CABLE ASSEMBLIES				
THIRD ANGLE PROJECTION					(P)				
					LUCENT TECHNOLOGIES - PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS				
Lucent Technologies, Inc.		ED5D585-22		SHEET	ISSUE	DWG SIZE			
				C2	12	C2/AIR			

ED5D585-22

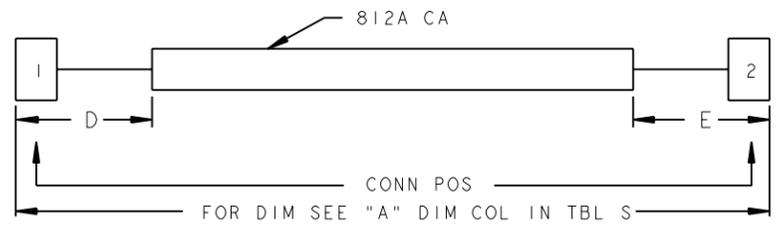


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.  
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK.A  
 (SEE TABLE S)

GROUP	CABLE CODE	"A" DIM CM FT-IN		"A" DIM TOLERANCE CM IN		LENGTH FROM CABLE BUTT TO FRONT OF CONN				
						"D" DIM		"E" DIM		SK
						CM	FT-IN	CM	FT-IN	
43,43A	812A	525	[17-03]	±8	[±3 1/8]	3.8	[0-1 1/2]	3.8	[0-1 1/2]	A
44,44A		480	[15-09]	±6	[±2 7/8]					
45,45A		480	[15-09]	±7	[±2 7/8]					
46,46A		520	[17-01]	±8	[±3]					
47,47A		605	[19-10]	±9	[±3 5/8]					
48,48A		559	[18-04]	±8	[±3 1/4]					
49,49A		158	[5-02]	±2	[±1]					
50,50A		138	[4-06]	±2	[±7/8]					
51,51A		239	[7-10]	±4	[±1 3/8]					
52,52A		204	[6-08]	±3	[±1 1/4]					
53,53A		193	[6-04]	±3	[±1 1/8]					
54,54A		239	[7-10]	±4	[±1 3/8]					
55,55A		318	[10-05]	±5	[±1 7/8]					
56,56A		270	[8-10]	±4	[±1 5/8]					
57,57A		275	[9-00]	±4	[±1 5/8]					
58,58A		318	[10-05]	±5	[±1 7/8]					
59,59A		396	[13-00]	±6	[±2 3/8]					
60,60A		323	[10-07]	±5	[±1 7/8]					
61,61A		323	[10-07]	±5	[±1 7/8]					
62,62A		401	[13-02]	±6	[±2 3/8]					
63,63A		480	[15-09]	±7	[±2 7/8]					

TITLE					INTERCABINET CABLE ASSEMBLIES				
THIRD ANGLE PROJECTION					LUCENT TECHNOLOGIES - PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS				
Lucent Technologies, Inc.		ED5D585-22			C3		12		C2/AIR

ED5D585-22

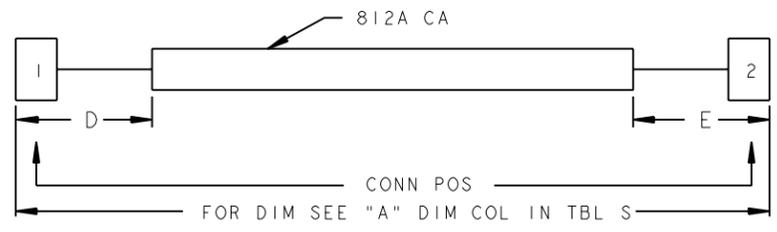


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.  
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK.A  
 (SEE TABLE S)

GROUP	CABLE CODE	"A" DIM CM FT-IN		"A" DIM TOLERANCE CM IN		LENGTH FROM CABLE BUTT TO FRONT OF CONN					
						"D" DIM		"E" DIM		SK	
						CM	FT-IN	CM	FT-IN		
64,64A	812A	401	[13-02]	±6	[±2 3/8]	3.8	[0-1 1/2]	3.8	[0-1 1/2]	A	
65,65A		401	[13-02]	±6	[±2 3/8]						
66,66A		272	[8-11]	±4	[±1 5/8]						
67,67A		554	[18-02]	±8	[±3 1/4]						
68,68A		480	[15-09]	±7	[±2 7/8]						
69,69A		480	[15-09]	±7	[±2 7/8]						
70,70A		554	[18-02]	±8	[±3 1/4]						
71,71A		618	[20-09]	±9	[±3 3/4]						
72,72A		158	[5-02]	±2	[±7/8]						
73,73A		158	[5-02]	±2	[±7/8]						
74,74A		141	[4-07]	±2	[±7/8]						
75,75A		211	[6-11]	±3	[±1 1/4]						
76,76A		572	[18-09]	±9	[±3 3/8]						
77,77A		143	[4-08]	±2	[±7/8]						
78,78A		173	[5-08]	±3	[±1]						
79,79A		173	[5-08]	±3	[±1]						
80,80A		138	[4-06]	±2	[±3/4]						
81,81A		178	[5-10]	±3	[±1]						
82,82A		259	[8-06]	±4	[±1 1/2]						
83,83A		285	[9-04]	±4	[±1 5/8]						
84,84A		204	[6-08]	±3	[±1 1/4]						

TITLE					INTERCABINET CABLE ASSEMBLIES				
THIRD ANGLE PROJECTION					(P)				
					LUCENT TECHNOLOGIES - PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS				
Lucent Technologies, Inc.		ED5D585-22		SHEET	ISSUE	DWG SIZE			
				C4	12	C2/AIR			

ED5D585-22

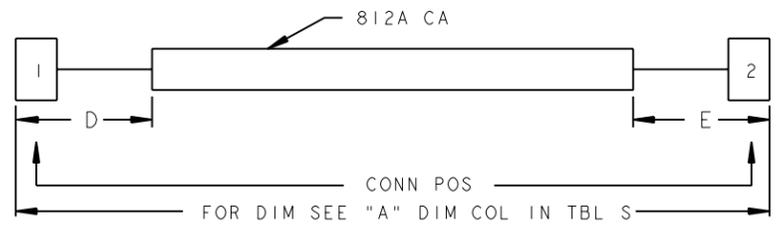


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.  
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK.A  
 (SEE TABLE S)

GROUP	CABLE CODE	"A" DIM CM FT-IN		"A" DIM TOLERANCE CM IN		LENGTH FROM CABLE BUTT TO FRONT OF CONN				SK
						"D" DIM		"E" DIM		
						CM	FT-IN	CM	FT-IN	
85,85A	812A	292	[9-07]	±4	[±1 5/8]	3.8	[0-1 1/2]	3.8	[0-1 1/2]	A
86,86A		379	[12-05]	±5	[±2 1/8]					
87,87A		379	[12-05]	±5	[±2]					
88,88A		292	[9-07]	±4	[±1 1/2]					
89,89A		488	[16-00]	±7	[±2 7/8]					
90,90A		406	[13-04]	±6	[±2 3/8]					
91,91A		350	[11-06]	±5	[±2 1/8]					
92,92A		437	[14-04]	±7	[±2 5/8]					
93,93A		595	[19-06]	±9	[±1 3/4]					
94,94A		510	[16-09]	±8	[±2 1/8]					
95,95A		437	[14-04]	±7	[±2 5/8]					
96,96A		518	[17-00]	±8	[±3]					
97,97A		645	[21-02]	±10	[±3 3/4]					
98,98A		566	[18-07]	±8	[±3 3/8]					
99,99A		530	[17-05]	±8	[±3 1/8]					
100,100A		607	[19-11]	±9	[±3 5/8]					
101,101A		143	[4-08]	±2	[±7/8]					


TITLE					INTERCABINET CABLE ASSEMBLIES				
THIRD ANGLE PROJECTION					(P)				
					LUCENT TECHNOLOGIES - PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS				
Lucent Technologies, Inc.		ED5D585-22		SHEET	ISSUE	DWG SIZE			
				C5	12	C2/AIR			

ED5D585-22

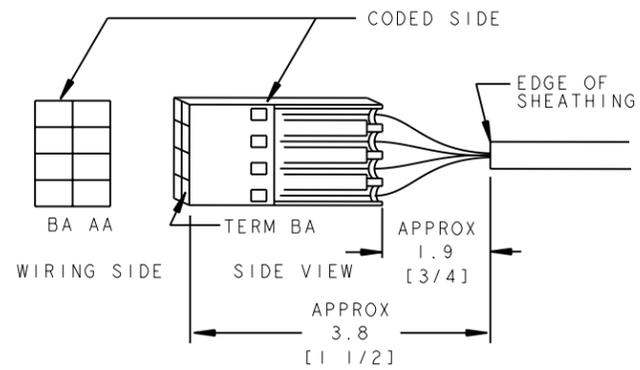


TYPICAL METHOD OF ASSEMBLING 963T-8 CONNECTOR (2 X 4) ON TO PREPARED CABLE END

FIG. 1

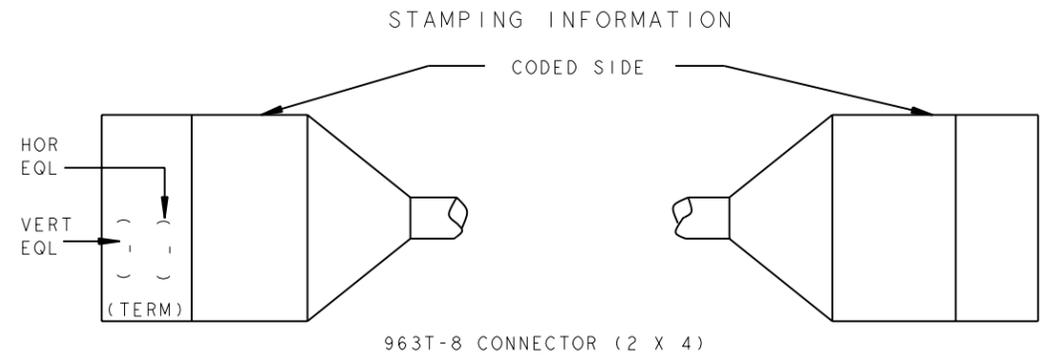

CONNECTING INFORMATION

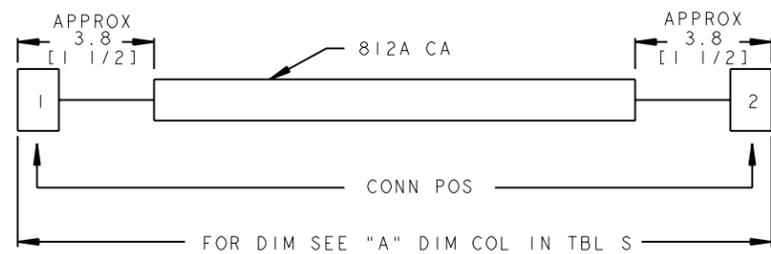


CONN POS 1,2			
WIRING SIDE OF 963T-8			
COLOR	TERM	TERM	COLOR
W-BL	AA	BA	BL-W
W-O	AB	BB	O-W
W-G	AC	BC	G-W
W-BR	AD	BD	BR-W

CODED SIDE OF CONN

GROUP 1 THRU 101


ED5D585-22

TITLE				
INTERCABINET CABLE ASSEMBLIES				
(P)				
THIRD ANGLE PROJECTION		LUCENT TECHNOLOGIES - PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS		
		SHEET	ISSUE	DWG SIZE
Lucent Technologies, Inc.		ED5D585-22	C6	12 C2/AIR

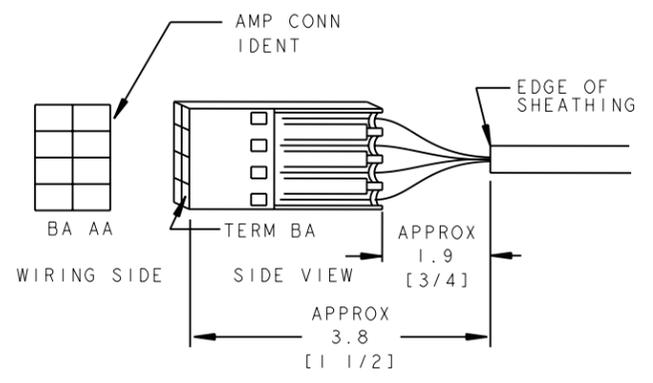


TYPICAL METHOD OF ASSEMBLING RVI25 CONNECTOR (2 X 4) ON TO PREPARED CABLE END  
FIG. 2

STAMPING INFORMATION

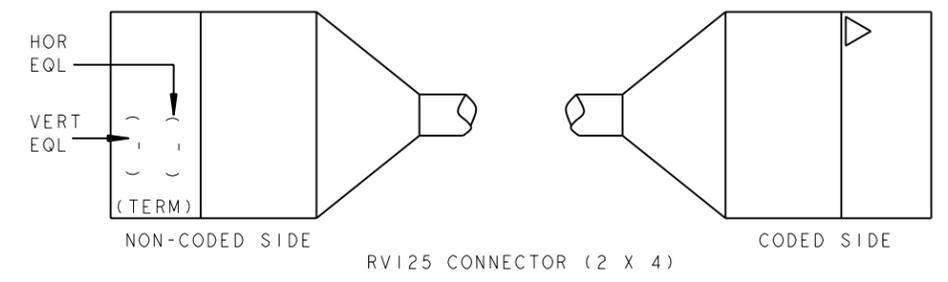

CONNECTING INFORMATION

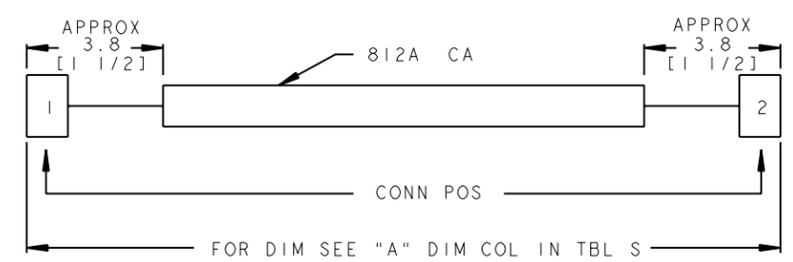

CONN POS 1,2			
WIRING SIDE OF RVI25			
COLOR	TERM	TERM	COLOR
W-BL	BD	AD	BL-W
W-O	BC	AC	O-W
W-G	BB	AB	G-W
W-BR	BA	AA	BR-W

CODED SIDE OF CONN

TITLE INTERCABINET CABLE ASSEMBLIES				
THIRD ANGLE PROJECTION				
LUENT TECHNOLOGIES - PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS				
Lucent Technologies, Inc.	ED5D585-22	SHEET C7	ISSUE 12	DWG SIZE C2/AIR

ED5D585-22

GROUP 1A THRU 101A


STAMPING INFORMATION

STAMPING TABLE								
GROUP	CONN POS	EQL	TERM	CAB	CONN POS	EQL	TERM	CAB
1, 1A	1	653-088	339		2	628-154	336	
2, 2A	1	553-088	334		2	528-154	545	
3, 3A	1	553-088	339		2	628-154	545	
4, 4A	1	653-088	334		2	528-154	336	
5, 5A	1	753-088	339		2	628-154	321	
6, 6A	1	453-088	334		2	528-154	532	
7, 7A	1	453-088	339		2	628-154	532	
8, 8A	1	753-088	334		2	528-154	321	
9, 9A	1	853-088	339		2	628-154	313	
10, 10A	1	353-088	334		2	528-154	517	
11, 11A	1	353-088	339		2	628-154	517	
12, 12A	1	853-088	334		2	528-154	313	
13, 13A	1	653-088	339		2	628-154	336	
14, 14A	1	553-176	334		2	528-154	536	
15, 15A	1	553-176	339		2	628-154	536	
16, 16A	1	653-088	334		2	528-154	336	
17, 17A	1	753-176	339		2	628-154	332	
18, 18A	1	453-176	334		2	528-154	521	
19, 19A	1	453-176	339		2	628-154	521	
20, 20A	1	753-176	334		2	528-154	332	
21, 21A	1	853-176	339		2	628-154	317	
22, 22A	1	353-176	334		2	528-154	513	
23, 23A	1	353-176	339		2	628-154	513	
24, 24A	1	853-176	334		2	528-154	317	
25, 25A	1	653-088	339		2	628-154	336	
26, 26A	1	553-088	334		2	528-170	545	
27, 27A	1	553-088	339		2	628-170	545	
28, 28A	1	653-088	334		2	528-154	336	
29, 29A	1	753-088	339		2	628-154	321	
30, 30A	1	453-088	334		2	528-170	532	

STAMPING TABLE								
GROUP	CONN POS	EQL	TERM	CAB	CONN POS	EQL	TERM	CAB
31, 31A	1	453-088	339		2	628-170	532	
32, 32A	1	753-088	334		2	528-154	321	
33, 33A	1	853-088	339		2	628-154	313	
34, 34A	1	353-088	334		2	528-170	517	
35, 35A	1	353-088	339		2	628-170	517	
36, 36A	1	853-088	334		2	528-154	313	
37, 37A	1	953-088	339		2	628-154	345	
38, 38A	1	253-088	334		2	528-170	536	
39, 39A	1	253-088	339		2	628-170	536	
40, 40A	1	953-088	334		2	528-154	345	
41, 41A	1	1053-088	339		2	628-154	332	
42, 42A	1	153-088	334		2	528-170	521	
43, 43A	1	153-088	339		2	628-170	521	
44, 44A	1	1053-088	334		2	528-154	332	
45, 45A	1	1153-088	339		2	628-154	317	
46, 46A	1	053-088	334		2	528-170	513	
47, 47A	1	053-088	339		2	628-170	513	
48, 48A	1	1153-088	334		2	528-154	317	
49, 49A	1	653-176	339		2	628-170	345	
50, 50A	1	553-176	334		2	528-154	536	
51, 51A	1	553-176	339		2	628-154	536	
52, 52A	1	653-176	334		2	528-154	345	
53, 53A	1	753-176	339		2	628-154	332	
54, 54A	1	453-176	334		2	528-154	521	
55, 55A	1	453-176	339		2	628-154	521	
56, 56A	1	753-176	334		2	528-154	332	
57, 57A	1	853-176	339		2	628-154	317	
58, 58A	1	353-176	334		2	528-154	513	

GROUP 1, 1A THRU 58, 58A

ED5D585-22

TITLE					INTERCABINET CABLE ASSEMBLIES				
THIRD ANGLE PROJECTION					Ⓟ				
					LUCENT TECHNOLOGIES - PROPRIETARY USE PURSUANT TO COMPANY INSTRUCTIONS				
Lucent Technologies, Inc.		ED5D585-22			SHEET	ISSUE	DWG SIZE		
					C8	12	C2/AIR		



STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1020	1,2,3,4, 5,6,7,8, 9,10,11, 12,13,14, 15,16,17, 18,19,20, 21,22,23, 24,25,26, 27,28,29, 30,31,32, 33,34,35, 36,37,38, 39,40,41, 42,43,44, 45,46,47, 48,49,50, 51,52,53, 54,55,56, 57,58,59, 60,61,62, 63,64,65, 66,67,68, 69,70,71, 72,73,74, 75,76,77, 78,79,80, 81,82,83, 84,85,86, 87,88,89, 90,91,92, 93,94,95, 96,97,98, 99,100, 101	2	105772792	963T-8	CONNECTOR			
1025	1A,2A,3A, 4A,5A,6A, 7A,8A,9A, 10A,11A, 12A,13A, 14A,15A, 16A,17A, 18A,19A, 20A,21A, 22A,23A, 24A,25A, 26A,27A, 28A,29A, 30A,31A, 32A,33A, 34A,35A, 36A,37A, 38A,39A, 40A,41A, 42A,43A, 44A,45A, 46A,47A, 48A,49A, 50A,51A, 52A,53A, 54A,55A, 56A,57A, 58A,59A, 60A,61A, 62A,63A, 64A,65A, 66A,67A, 68A,69A, 70A,71A, 72A,73A, 74A,75A, 76A,77A, 78A,79A, 80A,81A, 82A,83A, 84A,85A, 86A,87A, 88A,89A, 90A,91A, 92A,93A, 94A,95A, 96A,97A, 98A,99A, 100A, 101A	2	406922245		CONNECTOR #966061-8 AMP INC.			

STOCKLIST CONTINUED ON SHEET D2

S H O P	I N S T	MANUFACTURING NOTES																									
				<p>1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN METRICS (CM). EQUIVALENT INCH DIMENSIONS ARE ENCLOSED IN BRACKETS.</p> <p>2. DIMENSIONS 12 INCHES AND OVER ARE EXPRESSED IN FEET AND INCHES. ALL OTHER DIMENSIONS ARE IN INCHES.</p> <p>3. OVERALL CABLE LENGTH (DESIGNATED AS "A" DIM IN TBL S) IS THE LENGTH OF FINISHED CABLE MEASURED FROM THE FARTHEST TIP OF CONN AT ONE END OF THAT CABLE TO THE FARTHEST TIP OF CONN AT THE OTHER END.</p> <p>4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS WILL HOLD A LENGTH TOLERANCE AS FOLLOWS:</p> <table border="0"> <tr> <td>METRIC</td> <td></td> <td>ENGLISH</td> <td></td> </tr> <tr> <td>LENGTH</td> <td>TOLERANCE</td> <td>LENGTH</td> <td>TOLERANCE</td> </tr> <tr> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>0-1 M</td> <td>+/-1.5 CM</td> <td>(ZERO TO 3'-4"</td> <td>+/-0.5")</td> </tr> <tr> <td>1 M AND UP</td> <td>+/-1.5%</td> <td>(3'-4" &amp; UP</td> <td>+/-1.5%)</td> </tr> <tr> <td></td> <td></td> <td>ROUNDED UP TO 1 CM OR 0.5"</td> <td></td> </tr> </table> <p>5. AA, AB, BA, BB ETC., ARE TERMINAL REFERENCES ONLY. DO NOT STAMP THESE ON BACKPLANE CONNECTORS.</p> <p>6. BL-W/W-BL ETC., INDICATES PAIRED LEADS. COLOR AT LEFT OF SLASH INDICATES COLOR OF LEAD TO BE CONNECTED. COLOR AT RIGHT OF SLASH IS THE COLOR OF THE OTHER LEAD IN THE PAIR.</p> <p>7. EQL (EQUIPMENT LOCATION) SHOWN IN THE STAMPING TABLE IS IDENTIFIED AS FOLLOWS:</p> <p style="text-align: center;">(VERT) (HOR) 119 - 042</p> <p>8. REFER TO LOCAL MANUFACTURING DOCUMENTATION FOR SPECIFICS.</p>		METRIC		ENGLISH		LENGTH	TOLERANCE	LENGTH	TOLERANCE	-----	-----	-----	-----	0-1 M	+/-1.5 CM	(ZERO TO 3'-4"	+/-0.5")	1 M AND UP	+/-1.5%	(3'-4" & UP	+/-1.5%)		
METRIC		ENGLISH																									
LENGTH	TOLERANCE	LENGTH	TOLERANCE																								
-----	-----	-----	-----																								
0-1 M	+/-1.5 CM	(ZERO TO 3'-4"	+/-0.5")																								
1 M AND UP	+/-1.5%	(3'-4" & UP	+/-1.5%)																								
		ROUNDED UP TO 1 CM OR 0.5"																									

ED5D585-22

SEE PROPRIETARY NOTICE ON SHEET ONE			
5ESS SWITCHING EQUIPMENT CABLE ASSEMBLIES FOR MSCU2 AND MSPU3		XT13	
		DWG SIZE C2	ISSUE 12
LUCENT TECHNOLOGIES INC		ED5D585-22	
		SHEET D1 OF 15	

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1030	1A, 2A, 3A, 4A, 5A, 6A, 7A, 8A, 9A, 10A, 11A, 12A, 13A, 14A, 15A, 16A, 17A, 18A, 19A, 20A, 21A, 22A, 23A, 24A, 25A, 26A, 27A, 28A, 29A, 30A, 31A, 32A, 33A, 34A, 35A, 36A, 37A, 38A, 39A, 40A, 41A, 42A, 43A, 44A, 45A, 46A, 47A, 48A, 49A, 50A, 51A, 52A, 53A, 54A, 55A, 56A, 57A, 58A, 59A, 60A, 61A, 62A, 63A, 64A, 65A, 66A, 67A, 68A, 69A, 70A, 71A, 72A, 73A, 74A, 75A, 76A, 77A, 78A, 79A, 80A, 81A, 82A, 83A, 84A, 85A, 86A, 87A, 88A, 89A, 90A, 91A, 92A, 93A, 94A, 95A, 96A, 97A, 98A, 99A, 100A, 101A	4	406884486		COVER, CONNECTOR #964393-4 AMP INC.			
1040	1, 1A, 2, 2A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 7 FEET 0 INCH			
1050	3, 3A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 8 FEET 0 INCH			
1060	4, 4A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 6 FEET 0 INCH			
1070	5, 5A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 9 FEET 0 INCH			
1080	6, 6A, 7, 7A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 10 FEET 0 INCH			
1090	8, 8A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 9 FEET 0 INCH			
1100	9, 9A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 12 FEET 0 INCH			
1110	10, 10A, 11, 11A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 13 FEET 0 INCH			
1120	12, 12A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 12 FEET 0 INCH			
1130	13, 13A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 6 FEET 0 INCH			
***** STOCKLIST CONTINUED AT RIGHT *****								

ED5D585-22

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1140	14, 14A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 5 FEET 0 INCH			
1150	15, 15A, 16, 16A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 7 FEET 0 INCH			
1160	17, 17A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 10 FEET 0 INCH			
1170	18, 18A, 19, 19A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 9 FEET 0 INCH			
1180	20, 20A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 10 FEET 0 INCH			
1190	21, 21A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 11 FEET 0 INCH			
1200	22, 22A, 23, 23A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 12 FEET 0 INCH			
1210	24, 24A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 13 FEET 0 INCH			
1220	25, 25A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 5 FEET 0 INCH			
1230	26, 26A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 6 FEET 0 INCH			
1240	27, 27A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 8 FEET 0 INCH			
1250	28, 28A, 29, 29A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 7 FEET 0 INCH			
1260	30, 30A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 8 FEET 0 INCH			
1270	31, 31A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 11 FEET 0 INCH			
1280	32, 32A, 33, 33A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 9 FEET 0 INCH			
1290	34, 34A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 11 FEET 0 INCH			
1300	35, 35A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 14 FEET 0 INCH			
1310	36, 36A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 12 FEET 0 INCH			
1320	37, 37A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 11 FEET 0 INCH			
STOCKLIST CONTINUED ON SHEET D3								

SEE PROPRIETARY NOTICE ON SHEET ONE	
XT13	
5ESS SWITCHING EQUIPMENT CABLE ASSEMBLIES FOR MSCU2 AND MSPU3	
DWG SIZE C2	ISSUE 12
LUCENT TECHNOLOGIES INC ED5D585-22	
SHEET OF D2 15	

STOCKLIST									
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE		
							SYM	NBR	
1330	38,38A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 13 FEET 0 INCH				
1340	39,39A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 15 FEET 0 INCH				
1350	40,40A, 41,41A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 14 FEET 0 INCH				
1360	42,42A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 15 FEET 0 INCH				
1370	43,43A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 18 FEET 0 INCH				
1380	44,44A, 45,45A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 16 FEET 0 INCH				
1390	46,46A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 18 FEET 0 INCH				
1400	47,47A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 20 FEET 0 INCH				
1410	48,48A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 19 FEET 0 INCH				
1420	49,49A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 6 FEET 0 INCH				
1430	50,50A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 5 FEET 0 INCH				
1440	51,51A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 8 FEET 0 INCH				
1450	52,52A, 53,53A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 7 FEET 0 INCH				
1460	54,54A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 8 FEET 0 INCH				
1470	55,55A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 11 FEET 0 INCH				
1480	56,56A, 57,57A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 9 FEET 0 INCH				
1490	58,58A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 11 FEET 0 INCH				
1500	59,59A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 14 FEET 0 INCH				
1510	60,60A, 61,61A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 11 FEET 0 INCH				
1520	62,62A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 14 FEET 0 INCH				
1530	63,63A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 16 FEET 0 INCH				
1540	64,64A, 65,65A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 14 FEET 0 INCH				
1550	66,66A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 9 FEET 0 INCH				

\*\*\*\*\* STOCKLIST CONTINUED AT RIGHT \*\*\*\*\*

ED5D585-22

STOCKLIST									
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE		
							SYM	NBR	
1560	67,67A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 19 FEET 0 INCH				
1570	68,68A, 69,69A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 16 FEET 0 INCH				
1580	70,70A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 19 FEET 0 INCH				
1590	71,71A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 21 FEET 0 INCH				
1600	72,72A, 73,73A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 6 FEET 0 INCH				
1610	74,74A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 5 FEET 0 INCH				
1620	75,75A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 7 FEET 0 INCH				
1630	76,76A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 19 FEET 0 INCH				
1640	77,77A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 5 FEET 0 INCH				
1650	78,78A, 79,79A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 6 FEET 0 INCH				
1660	80,80A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 5 FEET 0 INCH				
1670	81,81A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 6 FEET 0 INCH				
1680	82,82A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 9 FEET 0 INCH				
1690	83,83A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 10 FEET 0 INCH				
1700	84,84A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 7 FEET 0 INCH				
1710	85,85A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 10 FEET 0 INCH				
1720	86,86A, 87,87A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 13 FEET 0 INCH				
1730	88,88A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 10 FEET 0 INCH				
1740	89,89A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 17 FEET 0 INCH				

STOCKLIST CONTINUED ON SHEET D4

SEE PROPRIETARY NOTICE ON SHEET ONE	
XT13	
5ESS SWITCHING EQUIPMENT CABLE ASSEMBLIES FOR MSCU2 AND MSPU3	
DWG SIZE C2	ISSUE 12
LUCENT TECHNOLOGIES INC ED5D585-22	
SHEET D3 OF 15	

STOCKLIST

ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1750	90,90A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 14 FEET 0 INCH			
1760	91,91A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 12 FEET 0 INCH			
1770	92,92A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 15 FEET 0 INCH			
1780	93,93A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 20 FEET 0 INCH			
1790	94,94A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 17 FEET 0 INCH			
1800	95,95A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 15 FEET 0 INCH			
1810	96,96A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 18 FEET 0 INCH			
1820	97,97A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 22 FEET 0 INCH			
1830	98,98A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 19 FEET 0 INCH			
1840	99,99A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 18 FEET 0 INCH			
1850	100,100A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 20 FEET 0 INCH			
1860	101,101A	1	105412530	812A-4/26	CABLE 26 GAGE A DIMENSION = 5 FEET 0 INCH			

\*\*\*\*\* END OF STOCKLIST \*\*\*\*\*

SEE PROPRIETARY NOTICE ON SHEET ONE

XT13

5ESS SWITCHING EQUIPMENT  
CABLE ASSEMBLIES  
FOR  
MSCU2 AND MSPU3

DWG SIZE  
C2

ISSUE  
12

ED5D585-22

LUCENT TECHNOLOGIES INC ED5D585-22

SHEET D4  
OF 15

PRINTED IN U.S.A.