



# Shark Rocket Powerhead AH401 Post-Motor Filter Replacement

This guide shows how to replace the Post-Motor Filter on your Shark Rocket Powerhead AH401.

Written By: Shobhit Dabral



## INTRODUCTION


Dust will build up on the filter over time and block the airway, which will reduce the efficiency of the machine. This guide will show you how to replace a dirty or old Post-Motor Filter on your Shark Rocket Powerhead AH401.



## PARTS:

- Post-Motor Filter (1)


## Step 1 — Dust Cup

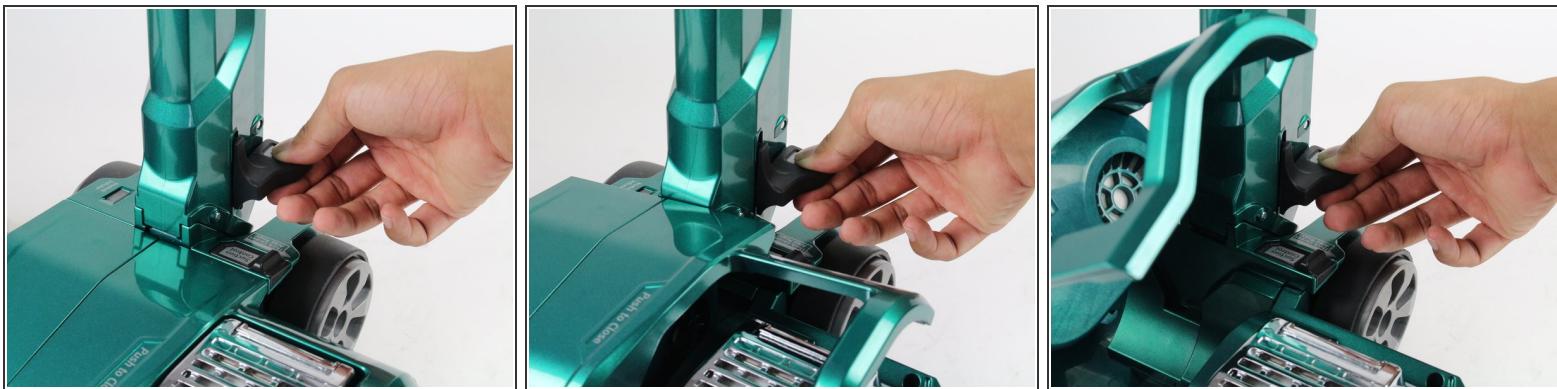

⚠ Ensure the device is turned off and unplugged from any power source before beginning work.


- Push down on the dust can lever to release the dust can in order to get to the filter grill.

## Step 2

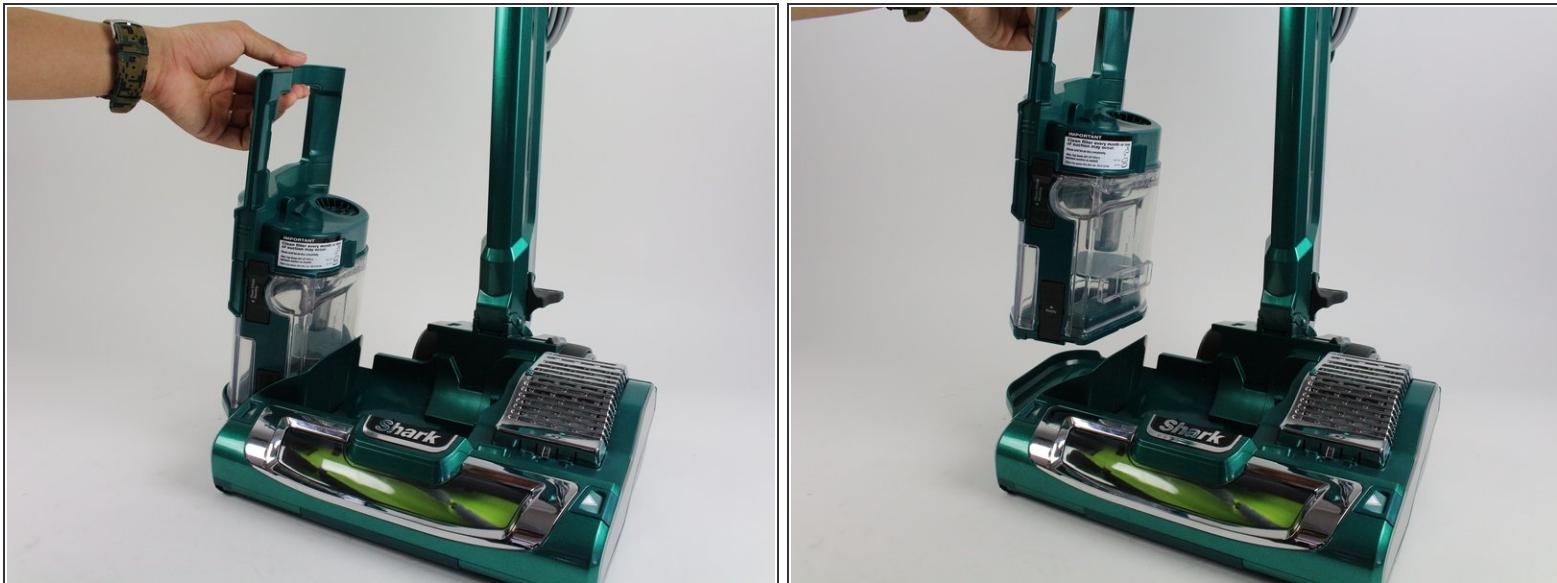

- Remove the dust cup by lifting it off the dock.

## Step 3 — Filter Grille

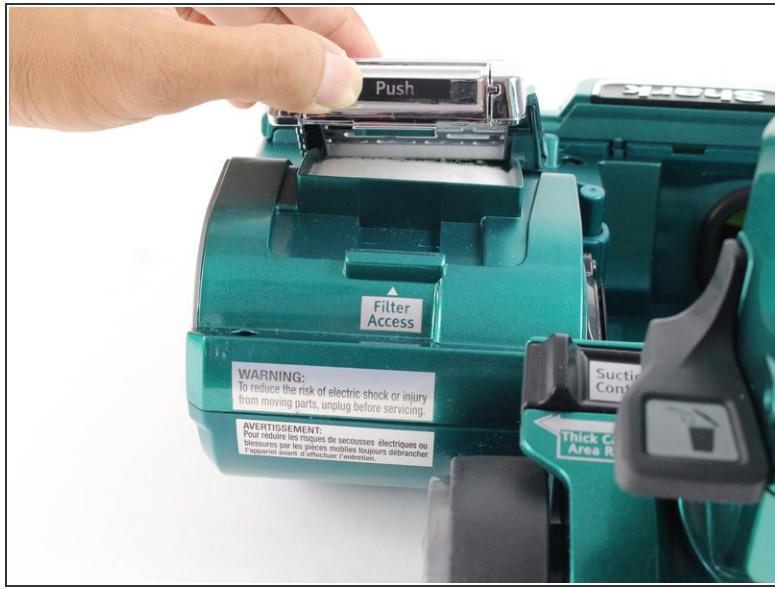

- Push inward on the top of the filter grille where it says "Push."
- Lift the filter grille upward.

## Step 4



- Lift gently and pull the grille up towards you until it releases.
- The post-motor filter is underneath the filter grille.

## Step 5 — Post-Motor Filter



- Remove the filter by pulling it out and away from the device with your hand.

To reassemble your device, follow these instructions in reverse order.