



Shark Ultimate Professional Reservoir Replacement

This guide will aid in the replacement of the reservoir part of the Shark Ultimate Professional clothes iron.

Written By: Drew Carff



This document was generated on 2019-09-22 06:04:57 AM (MST).

 **TOOLS:**

- Phillips #0 Screwdriver (1)


Step 1 — Reservoir



- Remove the two screws at the back of the iron.
- Remove the back cover piece.

 Make sure iron is unplugged and cooled off.

Step 2

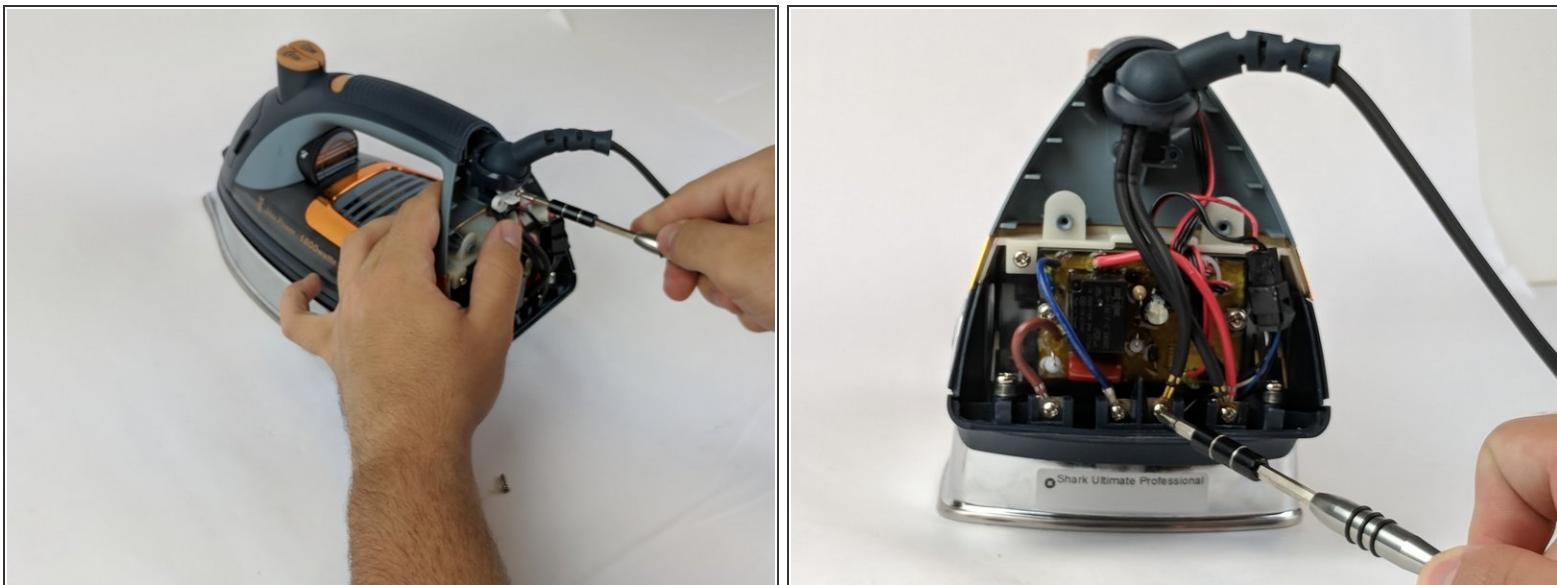

- Remove the two screws holding the white clamp to the iron.
- Remove the two screws holding the black wires to the body of the iron.



 Removing the left black wire will also free the red wire, attached by the same screw.

Step 3



- Pull the split end of the power cord upward through the ball joint of the iron.
- Set aside power cord.


Step 4

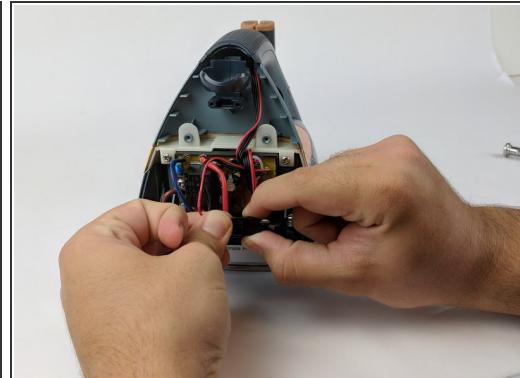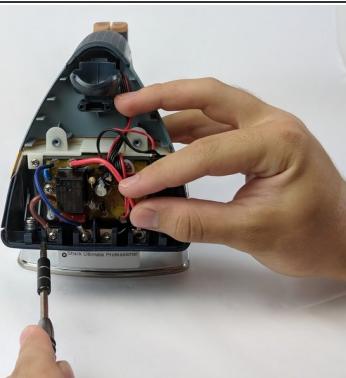

- Remove remaining screws that hold a wire on the bottom (brown and blue).
- Unscrew from left to right.
- Unclip the black adapter piece on the bottom right.

ⓘ Wires order (from left to right): Brown, Blue, Red, Black

Step 5

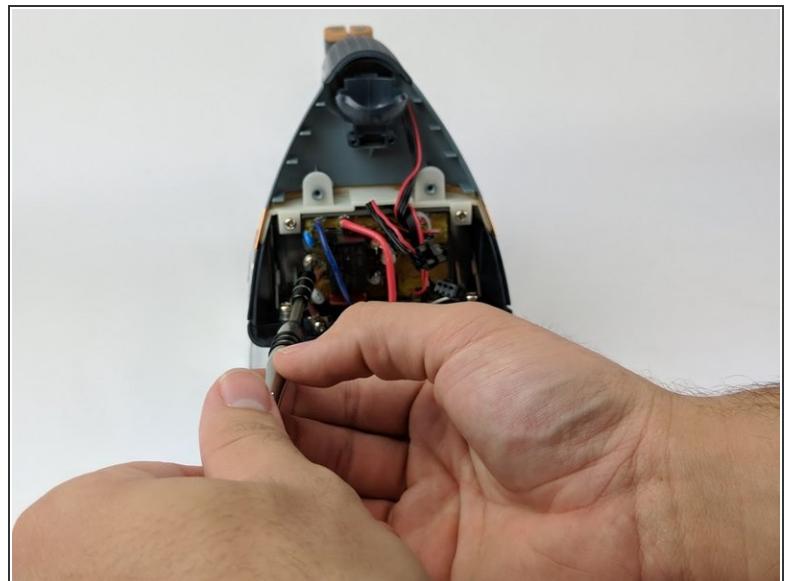

- Remove two screws (left and right) affixed to circuit board.

To reassemble your device, follow these instructions in reverse order.