




Shop-Vac MC150A Power Switch Replacement

This guide will help users replace a broken power switch.

Written By: Ngunlian

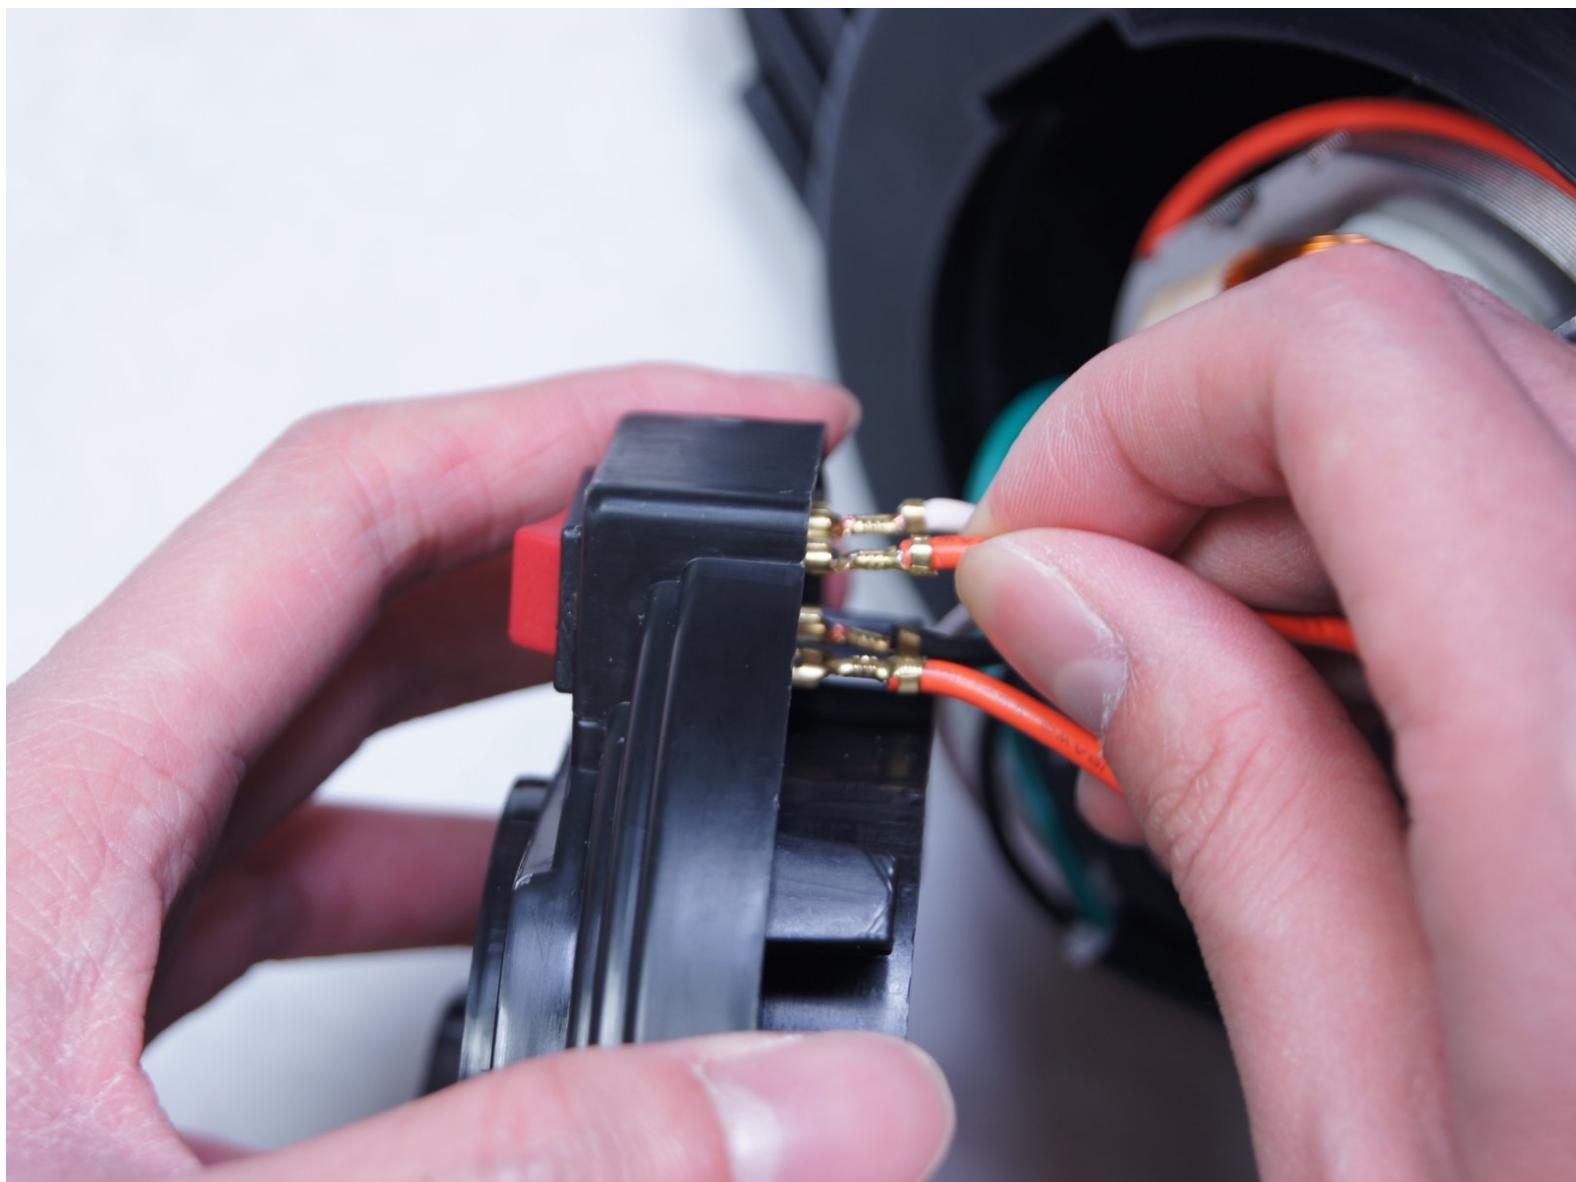

INTRODUCTION

Here you can learn to replace the power switch.

TOOLS:

- [Screwdriver \(1\)](#)
- [Metal Spudger Set \(1\)](#)

PARTS:

- [Power Switch \(1\)](#)

Step 1 — Power Unit Assembly



- Separate the power unit assembly (the black top) from the tank assembly (the red bottom).
- To open, grab the black clips on both sides of the vacuum. Pull away from device and lift up black top.

Step 2



- Turn over the black top and locate the 3 screws to remove the filter section.
- Remove the 3 H3.5 Allen screws on the black top.

Step 3




- Separate top filter section from the power unit assembly.
- Remove the four H3.5 Allen screws.

Step 4




- After removing the screws, separate the power unit assembly from the cover.

Step 5 — Power Switch

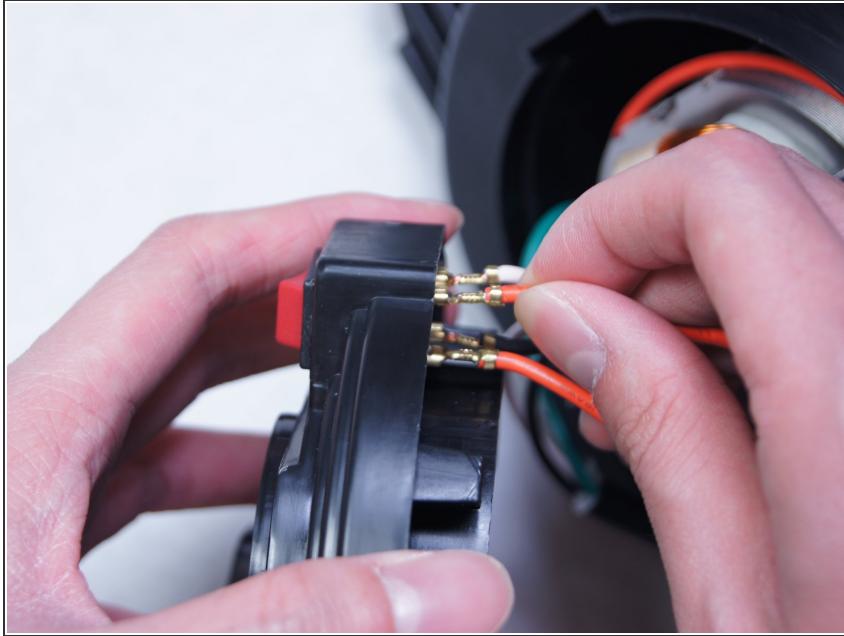

- Remove the four wires: 2 orange, 1 black, 1 white.

Step 6

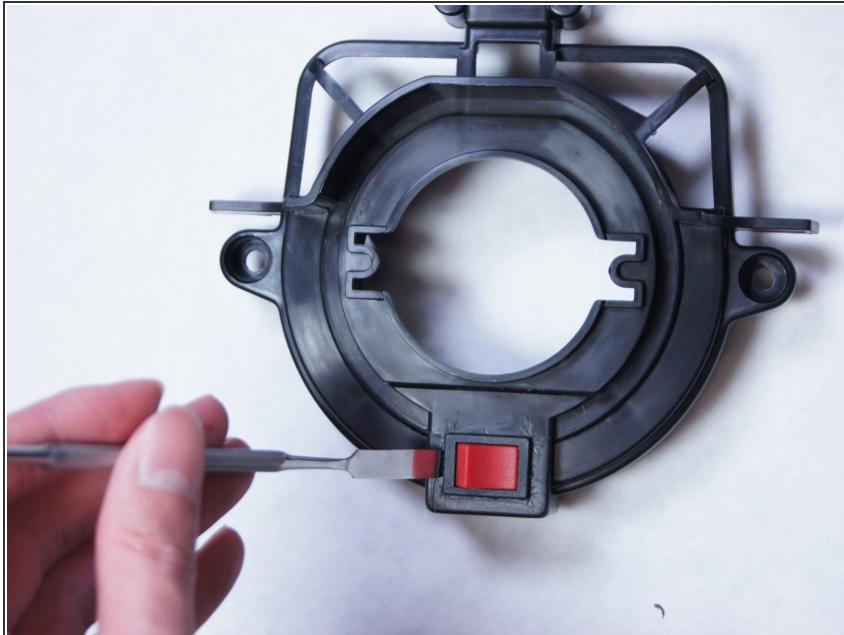

- Remove the red switch by using a metal spudger on each corner of the switch, loosening one corner at a time.

To reassemble your device, follow these instructions in reverse order.