

TABLE A-FEATURES										
EQUIPMENT		RAT- ING	LIST OR GROUP	EQUIPMENT OR CIRCUIT DATA				SD EQUIVALENT		
DESCRIPTION	REF NOTE			QTY	EQUIPMENT OR CIRCUIT	L/G OR FIG	WRG	APP	SCHEMATIC	FIG
WIRING AND APPARATUS FOR A CONNECTORIZED CABLE ASSEMBLY EQUIPPED WITH 963T TYPE CONN.			1 THRU 82							
WIRING AND APPARATUS FOR A CONNECTORIZED CABLE ASSEMBLY EQUIPPED WITH AMP TYPE CONN. FE/RA:NONE DA EFF:02/13/96		DA	1A THRU 84A							
WIRING AND APPARATUS FOR A CONNECTORIZED CABLE ASSEMBLY. DA EFF:07/30/99 FE/RA:NONE		DA	83							
WIRING AND APPARATUS FOR A CONNECTORIZED CABLE ASSEMBLY. DA EFF:07/30/99 FE/RA:NONE		DA	84							
END OF TABLE-A										

ENGINEERING NOTES

51. GROUP INDEX

GROUP	SHEET	DESCRIPTION
1-84 1A-84A	C1-C4	OVERALL CABLE LENGTHS
1-84	C5	CONNECTING AND STAMPING INFORMATION
1A-84A	C6	CONNECTING AND STAMPING INFORMATION

52. IN TABLE "A" GROUPS SHOWING LETTER SUFFIX (IE; 1A-84A) INDICATE A GROUP STRING OF THAT LETTER ONLY (IE; 1A,2A,3A ETC.).

ISSUE NOTES

ORIG ISS: 10/16/92 CHANGE CLASS: NEW

DRAFT: HZP ENGR: HZP SUPV: PK CERTIFIED: 10/16/92 ISSUE: 1

SHEET INDEX POPULATED.

ORIG ISS: 10/16/92 CHANGE CLASS: MF

DRAFT: HZP ENGR: HZP SUPV: CERTIFIED: 10/16/92 ISSUE: 2

GROUP 1A THRU 84A ADDED.

ORIG ISS: 10/16/92 CHANGE CLASS: ME

DRAFT: HZP ENGR: HZP SUPV: CERTIFIED: 12/03/92 ISSUE: 3

DWG REARRANGED PER OCW & NSI REQUEST.

ORIG ISS: 10/16/92 CHANGE CLASS: ME

DRAFT: HZP ENGR: HZP SUPV: CERTIFIED: 03/03/93 ISSUE: 4

DIM "A" INCREASED BY 4 INCHES FOR ALL GROUPS.

ORIG ISS: 10/16/92 CHANGE CLASS: ME

DRAFT: HZP ENGR: HZP SUPV: CERTIFIED: 05/11/93 ISSUE: 5

MFG NOTE 4 CHGD TO READ "A" DIM IN TBL S). GROUP 1A THRU 84A DA'D. CONNECTOR COVERS ADDED FOR THE 963T CONN.

ORIG ISS: 10/16/92 CHANGE CLASS: ME

DRAFT: HZP ENGR: HZP SUPV: CERTIFIED: 02/12/96 ISSUE: 6

ON ISS.6 OF THE DWG, TITLE BOX INFO MISTAKENLY CHANGED TO READ 4ESS - THIS ISSUE IS CORRECTING THAT ERROR.

ORIG ISS: 10/16/92 CHANGE CLASS: ME

DRAFT: HZP ENGR: HZP SUPV: CERTIFIED: 11/22/96 ISSUE: 7

STOCKLIST CHANGES: "107717456-1051B5/26RVA" WAS "106206410-1051005A" ON ITEMS 1050 THRU 1880. THE GRAPHICS CHANGED ACCORDINGLY. NDD CASE NO. H8010.

ORIG ISS: 10/16/92 NDD NBR: NDD5D734NW-12 CHANGE CLASS: ME

DRAFT: EDH ENGR: EDH SUPV: CERTIFIED: 02/14/97 ISSUE: 8

-----TAG H8643.1-----
(H8643)
REPLACED THE WORD NAR WITH (PREFERRED) IN FIG. 2 AND INTERNATIONAL WITH (OPTIONAL) IN FIG. 3, ON SHT C5. MODIFIED FIG. 3 NOTE TO REFER TO MFG. NOTE 12. RMV'ED ENG. NOTES 53, 54 AND 55. ADDED MFG. NOTES 12 AND 13.

ORIG ISS: 10/16/92 CHANGE CLASS: ME

DRAFT: JJW ENGR: JJW SUPV: CERTIFIED: 06/30/99 ISSUE: 9

SHEET INDEX

SHT NBR	ISSUE							ISSUE
		A1 THRU A1						ISSUE 9
		D1 THRU D3						ISSUE 9
SHT NBR		C1	C2	C3	C4	C5	C6	
ISSUE		8	8	8	8	9	8	
SHT NBR								
ISSUE								
SHT NBR								
ISSUE								
SHT NBR								
ISSUE								
SHT NBR								
ISSUE								
SHT NBR								
ISSUE								
SHT NBR								
ISSUE								
SHT NBR								
ISSUE								
SHT NBR								
ISSUE								

TABLE D-LIST OF ASSOCIATED REFERENCES

NUMBER	TITLE
=ED4C251-10	FASTECH WIRING & CABLING
=ED4C294-10	STAMPING NUMBERING & LETTERING
=DENOTES NOT REQD BY INSTALLER	

ED5D734-26


LUCENT TECHNOLOGIES - PROPRIETARY
USE PURSUANT TO COMPANY INSTRUCTIONS

XT13

5ESS SWITCHING EQUIPMENT
CABLE ASSEMBLY
FOR
PERIPHERAL INTERFACE CONTROL BUS
(PICB)
FOR SM/SM2000

DWG SIZE C2 ISSUE 9

LUCENT TECHNOLOGIES INC ED5D734-26 SHEET A1 OF 10

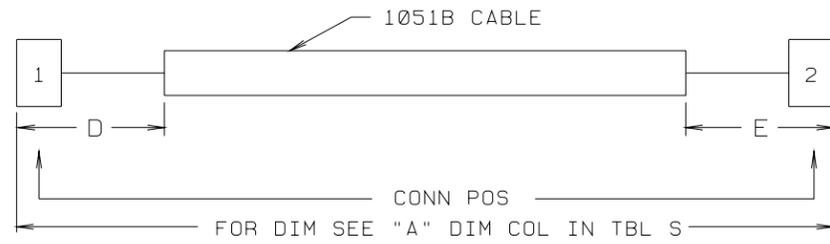


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK. A
 (SEE TABLE S)

GROUP	CABLE CODE	"A" DIM CM FT-IN		"A" DIM TOLERANCE CM IN		LENGTH FROM CABLE BUTT TO FRONT OF CONN				
						"D" DIM		"E" DIM		SK
						CM	FT-IN	CM	FT-IN	
1.1A	1051B	25.0	[0-10]	±2.0	[±1/2]	4.0	[0-1 1/2]	4.0	[0-1 1/2]	A
2.2A		36.0	[1-02]							
3.3A		46.0	[1-06]							
4.4A		56.0	[1-10]							
5.5A		66.0	[2-02]							
6.6A		76.0	[2-06]							
7.7A		86.0	[2-10]							
8.8A		97.0	[3-02]							
9.9A		107.0	[3-06]	±2.0	[±1/2]					
10.10A		117.0	[3-10]	±2.0	[±1/2]					
11.11A		127.0	[4-02]	±2.0	[±1]					
12.12A		137.0	[4-06]	±3.0	[±1]					
13.13A		147.0	[4-10]	±3.0	[±1]					
14.14A		157.0	[5-02]	±3.0	[±1]					
15.15A		168.0	[5-06]	±3.0	[±1]					
16.16A		178.0	[5-10]	±3.0	[±1]					
17.17A		188.0	[6-02]	±3.0	[±1 1/2]					
18.18A		198.0	[6-06]	±3.0	[±1 1/2]					
19.19A		208.0	[6-10]	±4.0	[±1 1/2]					
20.20A		218.0	[7-02]	±4.0	[±1 1/2]					
21.21A		229.0	[7-06]	±4.0	[±1 1/2]					

SEE PROPRIETARY NOTICE ON SHEET ONE		
SESS SWITCHING EQUIPMENT CABLE ASSEMBLIES	DWG SIZE	ISSUE
	C2	8
LUCENT TECHNOLOGIES INC.	ED5D734-26	SHEET C1

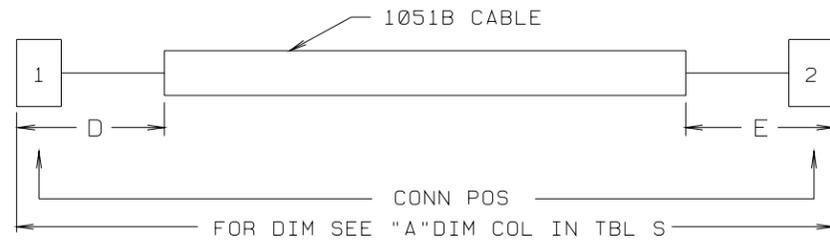


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK. A
 (SEE TABLE S)

TABLE S (CONT.)		LENGTH FROM CABLE BUTT TO FRONT OF CONN								
GROUP	CABLE CODE	"A" DIM		"A" DIM TOLERANCE		"D" DIM		"E" DIM		SK
		CM	FT-IN	CM	IN	CM	FT-IN	CM	FT-IN	
22.22A	1051B	239.0	[7-10]	±4.0	[±1 1/2]	4.0	[0-1 1/2]	4.0	[0-1 1/2]	A
23.23A		249.0	[8-02]	±4.0	[±1 1/2]					
24.24A		259.0	[8-06]	±4.0	[±1 1/2]					
25.25A		269.0	[8-10]	±5.0	[±1 1/2]					
26.26A		279.0	[9-02]	±5.0	[±2]					
27.27A		290.0	[9-06]	±5.0	[±2]					
28.28A		300.0	[9-10]	±5.0	[±2]					
29.29A		310.0	[10-02]	±5.0	[±2]					
30.30A		320.0	[10-06]	±5.0	[±2]					
31.31A		330.0	[10-10]	±5.0	[±2]					
32.32A		340.0	[11-02]	±6.0	[±2]					
33.33A		351.0	[11-06]	±6.0	[±2]					
34.34A		361.0	[11-10]	±6.0	[±2 1/2]					
35.35A		371.0	[12-02]	±6.0	[±2 1/2]					
36.36A		381.0	[12-06]	±6.0	[±2 1/2]					
37.37A		391.0	[12-10]	±6.0	[±2 1/2]					
38.38A		401.0	[13-02]	±7.0	[±2 1/2]					
39.39A		411.0	[13-06]	±7.0	[±2 1/2]					
40.40A		422.0	[13-10]	±7.0	[±2 1/2]					
41.41A		432.0	[14-02]	±7.0	[±2 1/2]					
42.42A		442.0	[14-06]	±7.0	[±3]					

SEE PROPRIETARY NOTICE ON SHEET ONE		
SESS SWITCHING EQUIPMENT CABLE ASSEMBLIES	DWG SIZE	ISSUE
	C2	8
LUCENT TECHNOLOGIES INC.	ED5D734-26	SHEET C2

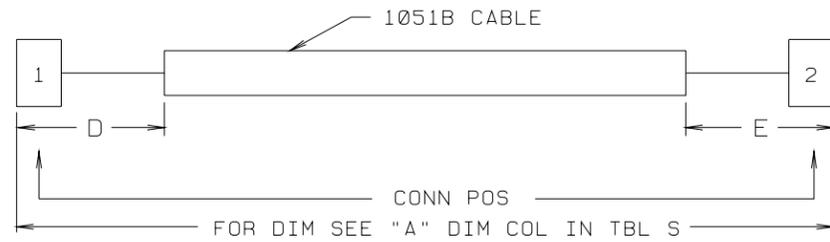


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK. A
 (SEE TABLE S)

TABLE S (CONT.)										
GROUP	CABLE CODE	"A" DIM CM FT-IN		"A" DIM TOLERANCE CM IN		LENGTH FROM CABLE BUTT TO FRONT OF CONN				
						"D" DIM		"E" DIM		SK
						CM	FT-IN	CM	FT-IN	
43.43A	1051B	452.0	[14-10]	±7.0	[±3]	4.0	[0-1 1/2]	4.0	[0-1 1/2]	A
44.44A		462.0	[15-02]	±7.0	[±3]					
45.45A		472.0	[15-06]	±8.0	[±3]					
46.46A		483.0	[15-10]	±8.0	[±3]					
47.47A		493.0	[16-02]	±8.0	[±3]					
48.48A		503.0	[16-06]	±8.0	[±3]					
49.49A		513.0	[16-10]	±8.0	[±3]					
50.50A		523.0	[17-02]	±8.0	[±3]					
51.51A		533.0	[17-06]	±8.0	[±3 1/2]					
52.52A		544.0	[17-10]	±9.0	[±3 1/2]					
53.53A		554.0	[18-02]	±9.0	[±3 1/2]					
54.54A		564.0	[18-06]	±9.0	[±3 1/2]					
55.55A		574.0	[18-10]	±9.0	[±3 1/2]					
56.56A		584.0	[19-02]	±9.0	[±3 1/2]					
57.57A		594.0	[19-06]	±9.0	[±3 1/2]					
58.58A		605.0	[19-10]	±10.0	[±3 1/2]					
59.59A		615.0	[20-02]	±10.0	[±4]					
60.60A		625.0	[20-06]	±10.0	[±4]					
61.61A		635.0	[20-10]	±10.0	[±4]					
62.62A		645.0	[21-02]	±10.0	[±4]					
63.63A		655.0	[21-06]	±10.0	[±4]					

SEE PROPRIETARY NOTICE ON SHEET ONE		
SESS SWITCHING EQUIPMENT CABLE ASSEMBLIES	DWG SIZE	ISSUE
	C2	8
LUCENT TECHNOLOGIES INC.	ED5D734-26	SHEET C3

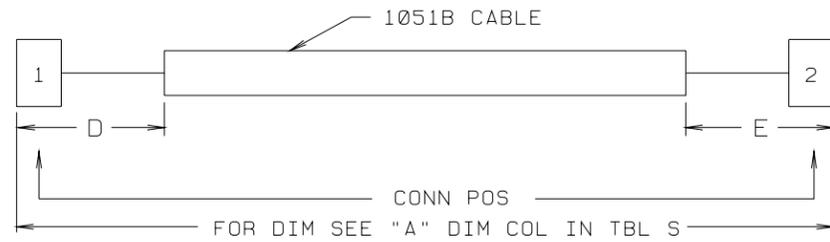


THE "A" DIM IS THE LENGTH OF SWBD CABLE FRONT OF CONN TO FRONT OF CONN.
 THE "D" AND "E" DIM ARE THE DIM FROM BUTT OF CABLE TO THE FRONT OF CONN.

SK. A
 (SEE TABLE S)

TABLE S (CONT.)										
GROUP	CABLE CODE	"A" DIM CM FT-IN		"A" DIM TOLERANCE CM IN		LENGTH FROM CABLE BUTT TO FRONT OF CONN				SK
						"D" DIM		"E" DIM		
						CM	FT-IN	CM	FT-IN	
64.64A	1051B	665.0	[21-10]	±10.0	[±4]	4.0	[0-1 1/2]	4.0	[0-1 1/2]	A
65.65A		676.0	[22-02]	±11.0	[±4]					
66.66A		686.0	[22-06]	±11.0	[±4]					
67.67A		696.0	[22-10]	±11.0	[±4 1/2]					
68.68A		706.0	[23-02]	±11.0	[±4 1/2]					
69.69A		716.0	[23-06]	±11.0	[±4 1/2]					
70.70A		726.0	[23-10]	±11.0	[±4 1/2]					
71.71A		737.0	[24-02]	±12.0	[±4 1/2]					
72.72A		747.0	[24-06]	±12.0	[±4 1/2]					
73.73A		757.0	[24-10]	±12.0	[±4 1/2]					
74.74A		767.0	[25-02]	±12.0	[±4 1/2]					
75.75A		777.0	[25-06]	±12.0	[±5]					
76.76A		787.0	[25-10]	±12.0	[±5]					
77.77A		798.0	[26-02]	±12.0	[±5]					
78.78A		808.0	[26-06]	±13.0	[±5]					
79.79A		818.0	[26-10]	±13.0	[±5]					
80.80A		828.0	[27-02]	±13.0	[±5]					
81.81A		838.0	[27-06]	±13.0	[±5]					
82.82A		848.0	[27-10]	±13.0	[±5]					
83.83A		859.0	[28-02]	±13.0	[±5]					
84.84A		869.0	[28-06]	±14.0	[±6 1/2]					

SEE PROPRIETARY NOTICE ON SHEET ONE		
SESS SWITCHING EQUIPMENT CABLE ASSEMBLIES		
DWG SIZE C2	ISSUE 8	
LUCENT TECHNOLOGIES INC.	ED5D734-26	SHEET C4

963T-12 CONNECTOR (2X6)

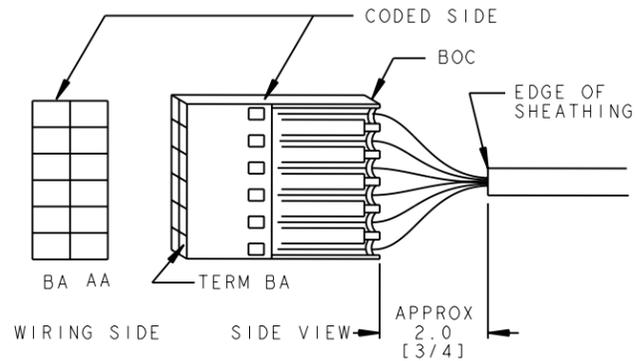


BOC INDICATES BACK OF 963T CONN

TYPICAL METHOD OF ASSEMBLING 963T-12 CONNECTOR (2 X 6) ON TO PREPARED CABLE END

FIG. 1


STAMPING INFORMATION (PREFERRED)

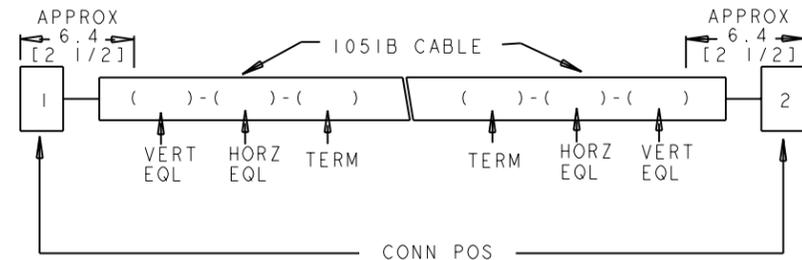

* STAMPING PROVIDED PER JOB SPEC.

FIG. 2


CONNECTING INFORMATION

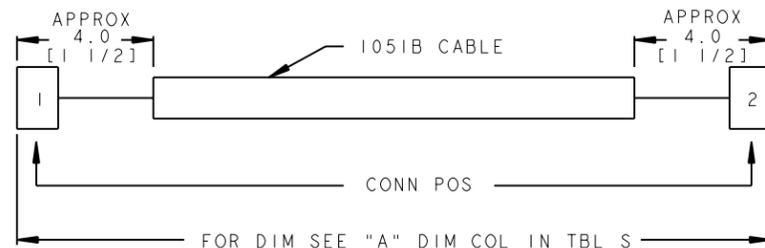

CONN POS 1, 2			
WIRING SIDE OF 963T-12			
COLOR	TERM	TERM	COLOR
	AA	BA	
BL/W	AB	BB	W/BL
O/W	AC	BC	W/O
G/W	AD	BD	W/G
BR/W	AE	BE	W/BR
S/W	AF	BF	W/S

CODED SIDE OF CONN

STAMPING INFORMATION (OPTIONAL)

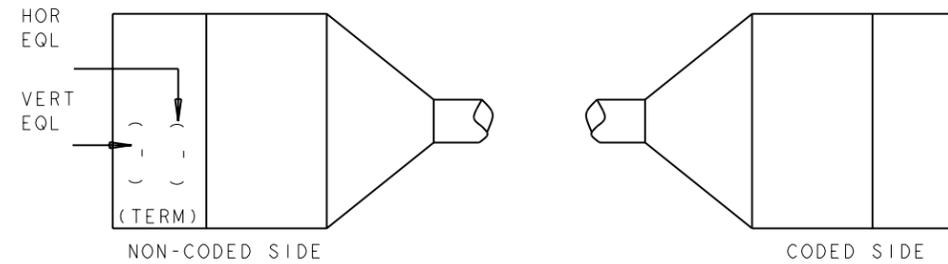


* STAMPING PROVIDED PER JOB SPEC. (FOR OPTIONAL STAMPING REFER TO MANUFACTURING NOTE 12)

FIG. 3


GROUP 1 THRU 84

FOR PROPRIETARY NOTICE SEE SHEET A1		
5ESS SWITCHING EQUIPMENT CABLE ASSEMBLIES	THIRD ANGLE PROJ DWG SIZE C2	ISSUE 9
LUCENT TECHNOLOGIES	ED5D734-26	SHEET NO. C5
MODEL NAME		

RV125 (1-829758-2) CONNECTOR
(2X6)

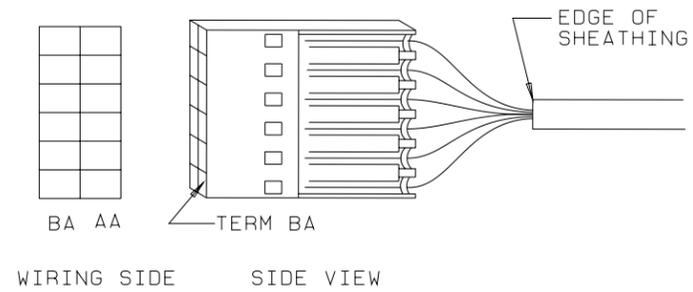

STAMPING INFORMATION *

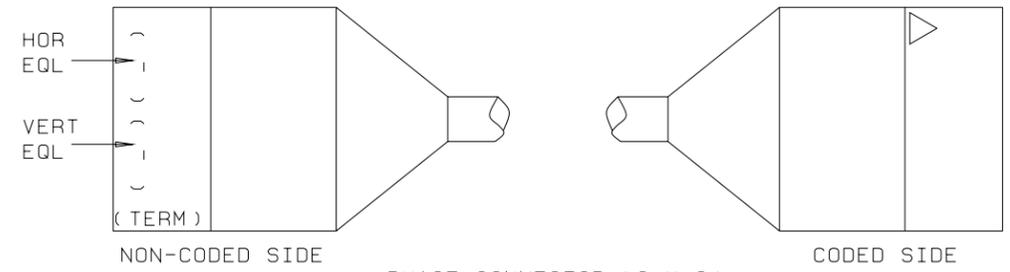


RV125 CONNECTOR (2 X 6)
* STAMPING PROVIDED PER JOB SPEC.

TYPICAL METHOD OF ASSEMBLING RV125
CONNECTOR (2 X 6) ON TO
PREPARED CABLE END

FIG. 2

CONNECTING INFORMATION

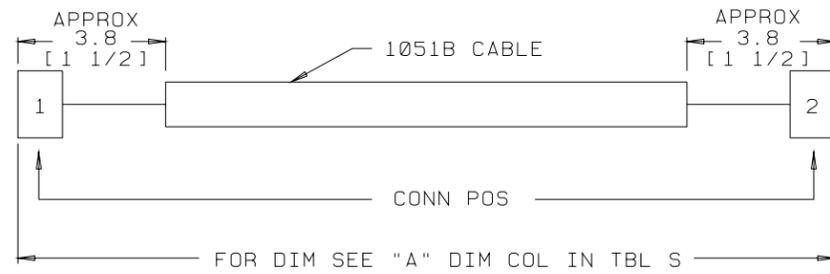

CONN POS 1,2			
WIRING SIDE OF RV125			
COLOR	TERM	TERM	COLOR
W/S	BF	AF	S/W
W/BR	BE	AE	BR/W
W/G	BD	AD	G/W
W/O	BC	AC	O/W
W/BL	BB	AB	BL/W
	BA	AA	

CODED SIDE OF CONN

SEE PROPRIETARY NOTICE ON SHEET ONE		
SESS SWITCHING EQUIPMENT CABLE ASSEMBLIES	DWG SIZE	ISSUE
	c2	8
LUCENT TECHNOLOGIES INC.	ED5D734-26	SHEET C6

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1000	1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,60,61,62,63,64,65,66,67,68,69,70,71,72,73,74,75,76,77,78,79,80,81,82,83,84	2	105772800	963T-12	CONNECTOR			
1020	1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,60,61,62,63,64,65,66,67,68,69,70,71,72,73,74,75,76,77,78,79,80,81,82,83,84	4	106904915	TCOV-NS12G	COVER, PROTECTIVE			
1050	1	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 10 INCHES			
1060	2	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 1 FOOT 2 INCHES			
1070	3	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 1 FOOT 6 INCHES			
1080	4	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 1 FOOT 10 INCHES			
1090	5	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 2 FEET 2 INCHES			
1100	6	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 2 FEET 6 INCHES			
1110	7	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 2 FEET 10 INCHES			
1120	8	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 3 FEET 2 INCHES			

STOCKLIST CONTINUED ON SHEET D2

ED5D734-26

S H O P T	MANUFACTURING NOTES	
		<ol style="list-style-type: none"> UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN METRICS (CM). EQUIVALENT INCH DIMENSIONS ARE ENCLOSED IN BRACKETS. DIMENSIONS 12 INCHES AND OVER ARE EXPRESSED IN FEET AND INCHES. ALL OTHER DIMENSIONS ARE IN INCHES. RESERVED. OVERALL CABLE LENGTH (DESIGNATED AS "A" DIM IN TEL S) IS THE LENGTH OF FINISHED CABLE MEASURED FROM THE FARTHEST TIP OF CONN AT ONE END OF THAT CABLE TO THE FARTHEST TIP OF CONN AT THE OTHER END. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS WILL HOLD A LENGTH TOLERANCE AS FOLLOWS: <ul style="list-style-type: none"> METRIC LENGTH TOLERANCE ENGLISH LENGTH TOLERANCE 0-1 M +/-1.5 CM {ZERO TO 3' 4" +/-0.5"} 1 M AND UP +/-1.5% {3' 4" & UP +/-1.5%} ROUNDED UP TO 1 CM OR 0.5". A/R=AS REQUIRED. AA, AB, BA, BB ETC., ARE TERMINAL REFERENCE ONLY. DO NOT STAMP THESE ON BACKPLANE CONNECTORS. BL-W/W-BL ETC., INDICATES PAIRED LEADS. COLOR AT LEFT OF SLASH INDICATES COLOR OF LEAD TO BE CONNECTED. COLOR AT RIGHT OF SLASH IS THE COLOR OF THE OTHER LEAD IN THE PAIR. () INDICATES DESIGNATIONS TO BE STAMPED IN ACCORDANCE WITH JOB INFORMATION. EQL (EQUIPMENT LOCATION) SHOWN IN THE STAMPING TABLE IS IDENTIFIED AS FOLLOWS: <ul style="list-style-type: none"> (VERT) (HOR) (TERM) 119 - 042 - 300 REFER TO LOCAL MANUFACTURING DOCUMENTATION FOR SPECIFICS. PREFERRED STAMPING ON JACKET PER FIG. 2, OPTIONAL STAMPING ON CONNECTOR PER FIG. 3 WHEN CAPABILITY FOR JACKET STAMPING IS NOT AVAILABLE. IT IS PERMISSIBLE TO PUT STAMPING OVER THE MANUFACTURE'S IDENTIFICATION INK.

SEE PROPRIETARY NOTICE ON SHEET ONE	
XT13	
5ESS SWITCHING EQUIPMENT CABLE ASSEMBLY FOR PERIPHERAL INTERFACE CONTROL BUS (PICB) FOR SM/SM2000	
DWG SIZE C2	ISSUE 9
LUCENT TECHNOLOGIES INC ED5D734-26	
SHEET D1 OF 10	

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1130	9	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 3 FEET 6 INCHES			
1140	10	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 3 FEET 10 INCHES			
1150	11	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 4 FEET 2 INCHES			
1160	12	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 4 FEET 6 INCHES			
1170	13	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 4 FEET 10 INCHES			
1180	14	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 5 FEET 2 INCHES			
1190	15	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 5 FEET 6 INCHES			
1200	16	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 5 FEET 10 INCHES			
1210	17	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 6 FEET 2 INCHES			
1220	18	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 6 FEET 6 INCHES			
1230	19	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 6 FEET 10 INCHES			
1240	20	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 7 FEET 2 INCHES			
1250	21	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 7 FEET 6 INCHES			
1260	22	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 7 FEET 10 INCHES			
1270	23	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 8 FEET 2 INCHES			
1280	24	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 8 FEET 6 INCHES			
1290	25	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 8 FEET 10 INCHES			
1300	26	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 9 FEET 2 INCHES			
1310	27	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 9 FEET 6 INCHES			
1320	28	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 9 FEET 10 INCHES			
1330	29	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 10 FEET 2 INCHES			
1340	30	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 10 FEET 6 INCHES			
1350	31	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 10 FEET 10 INCHES			

***** STOCKLIST CONTINUED AT RIGHT *****

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1360	32	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 11 FEET 2 INCHES			
1370	33	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 11 FEET 6 INCHES			
1380	34	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 11 FEET 10 INCHES			
1390	35	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 12 FEET 2 INCHES			
1400	36	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 12 FEET 6 INCHES			
1410	37,37A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 12 FEET 10 INCHES			
1420	38,38A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 13 FEET 2 INCHES			
1430	39,39A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 13 FEET 6 INCHES			
1440	40,40A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 13 FEET 10 INCHES			
1450	41,41A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 14 FEET 2 INCHES			
1460	42,42A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 14 FEET 6 INCHES			
1470	43,43A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 14 FEET 10 INCHES			
1480	44,44A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 15 FEET 2 INCHES			
1490	45,45A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 15 FEET 6 INCHES			
1500	46,46A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 15 FEET 10 INCHES			
1510	47,47A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 16 FEET 2 INCHES			
1520	48,48A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 16 FEET 6 INCHES			
1530	49,49A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 16 FEET 10 INCHES			
1540	50,50A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 17 FEET 2 INCHES			

STOCKLIST CONTINUED ON SHEET D3

SEE PROPRIETARY NOTICE ON SHEET ONE	
XT13	
5ESS SWITCHING EQUIPMENT CABLE ASSEMBLY FOR PERIPHERAL INTERFACE CONTROL BUS (PICB) FOR SM/SM2000	
DWG SIZE C2	ISSUE 9
LUCENT TECHNOLOGIES INC ED5D734-26	
SHEET D2 OF 10	

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1550	51,51A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 17 FEET 6 INCHES			
1560	52,52A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 17 FEET 10 INCHES			
1570	53,53A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 18 FEET 2 INCHES			
1580	54,54A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 18 FEET 6 INCHES			
1590	55,55A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 18 FEET 10 INCHES			
1600	56,56A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 19 FEET 2 INCHES			
1610	57,57A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 19 FEET 6 INCHES			
1620	58,58A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 19 FEET 10 INCHES			
1630	59,59A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 20 FEET 2 INCHES			
1640	60,60A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 20 FEET 6 INCHES			
1650	61,61A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 20 FEET 10 INCHES			
1660	62,62A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 21 FEET 2 INCHES			
1670	63,63A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 21 FEET 6 INCHES			
1680	64,64A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 21 FEET 10 INCHES			
1690	65,65A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 22 FEET 2 INCHES			
1700	66,66A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 22 FEET 6 INCHES			
1710	67,67A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 22 FEET 10 INCHES			
1720	68,68A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 23 FEET 2 INCHES			
1730	69,69A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 23 FEET 6 INCHES			
1740	70,70A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 23 FEET 10 INCHES			
1750	71,71A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 24 FEET 2 INCHES			
1760	72,72A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 24 FEET 6 INCHES			
1770	73,73A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 24 FEET 10 INCHES			

***** STOCKLIST CONTINUED AT RIGHT *****

ED5D734-26

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1780	74,74A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 25 FEET 2 INCHES			
1790	75,75A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 25 FEET 6 INCHES			
1800	76,76A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 25 FEET 10 INCHES			
1810	77,77A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 26 FEET 2 INCHES			
1820	78,78A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 26 FEET 6 INCHES			
1830	79,79A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 26 FEET 10 INCHES			
1840	80,80A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 27 FEET 2 INCHES			
1850	81,81A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 27 FEET 6 INCHES			
1860	82,82A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 27 FEET 10 INCHES			
1870	83,83A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 28 FEET 2 INCHES			
1880	84,84A	1	107717456	#1051B5/26RVA	CABLE, NON-CONNECTORIZED R A DIMENSION = 28 FEET 6 INCHES			

***** END OF STOCKLIST *****

SEE PROPRIETARY NOTICE ON SHEET ONE	
XT13	
5ESS SWITCHING EQUIPMENT CABLE ASSEMBLY FOR PERIPHERAL INTERFACE CONTROL BUS (PICB) FOR SM/SM2000	
DWG SIZE C2	ISSUE 9
LUCENT TECHNOLOGIES INC	ED5D734-26
SHEET D3 OF 10	