




# Uniden Guardian G955 Power Button Replacement

Successfully instruct user on how to replace the monitor's power button.

Written By: Pauline Lara

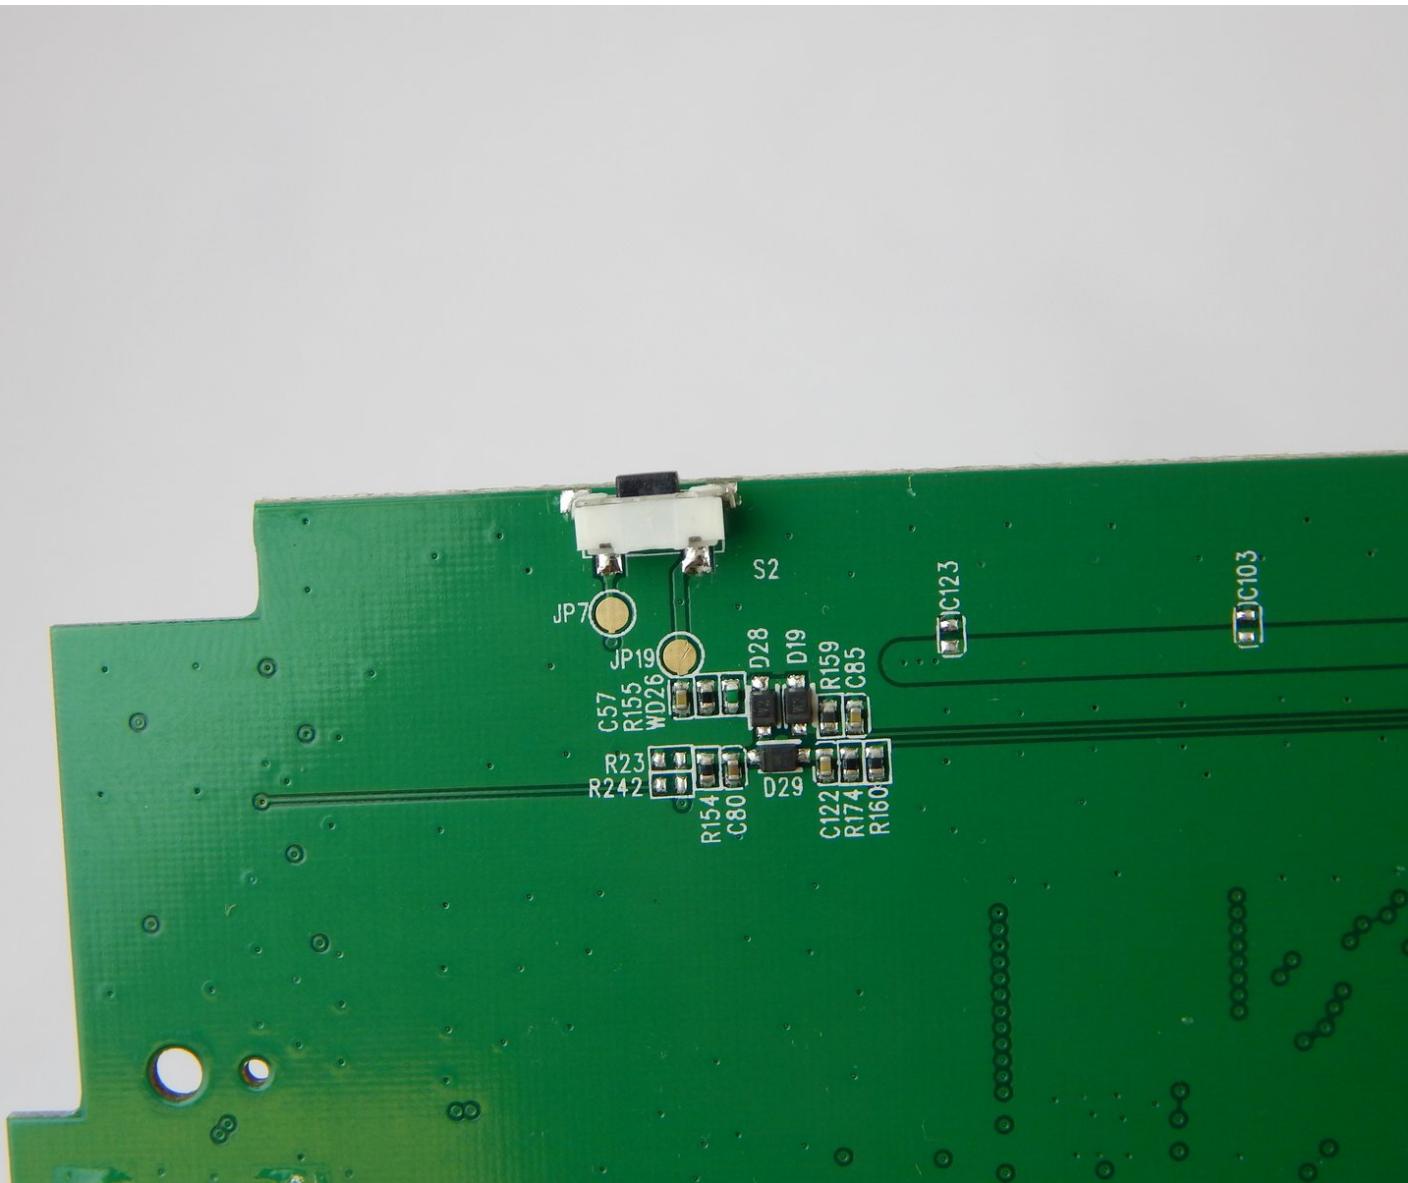

This document was generated on 2019-09-22 04:45:10 AM (MST).


## INTRODUCTION

This replacement guide will require a soldering tool and various other iFixit tools.

### TOOLS:

- [J1 Screwdriver Bit](#) (1)
- [Metal Spudger](#) (1)
- [Soldering Iron](#) (1)

## Step 1 — Power Button

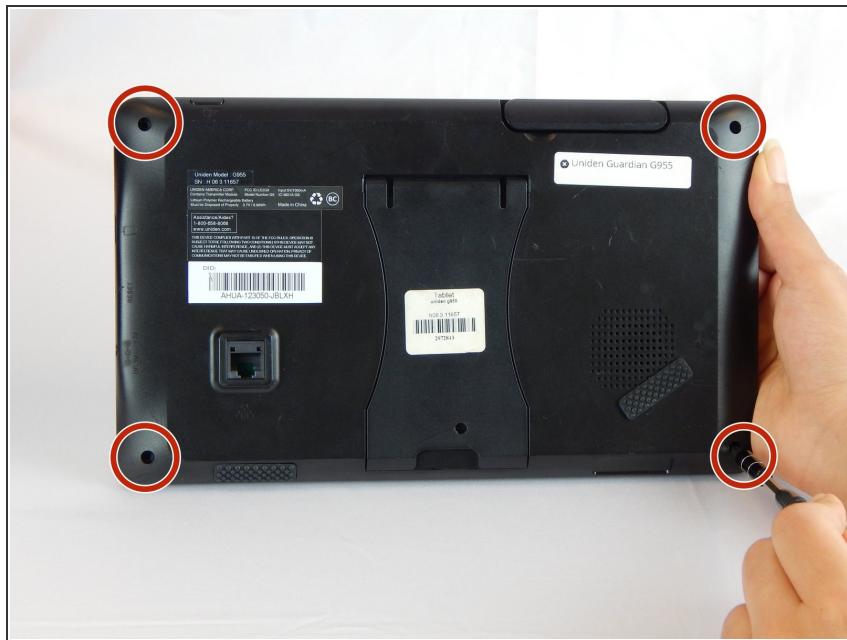


- Use a J1 Phillips screwdriver to remove the four 6.1 mm screws at the back of the monitor.

## Step 2




- Use a metal spudger or an opening tool to pry open the device.

## Step 3

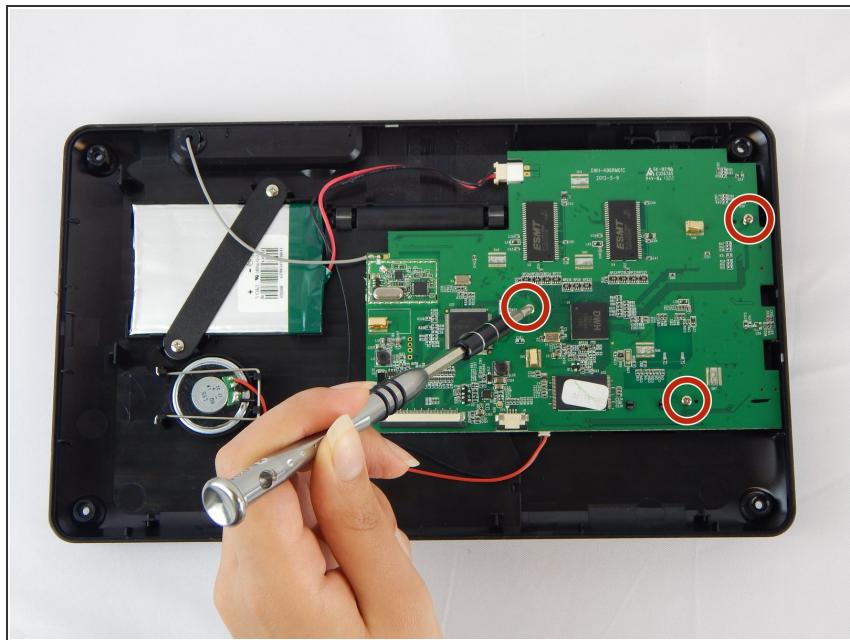

- Use a J1 Phillips screwdriver to remove the three 6.1 mm screws on the motherboard.

## Step 4

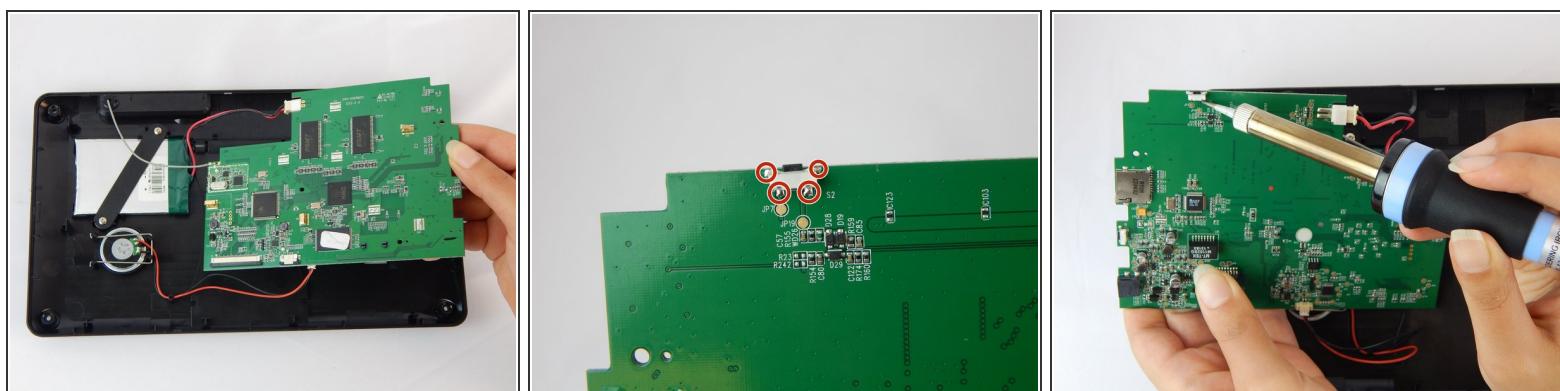

- Carefully, lift the motherboard and turn it to the backside.
- Desolder the four corners of the power button. Please follow this link on how to proceed to desolder: [How To Solder and Desolder Connections](#)

To reassemble your device, follow these instructions in reverse order.