

Nortel CallPilot

Meridian Mail to CallPilot Migration Utility Guide

Document status: Standard
Document version: 01.02
Document date: 17 April 2007

Copyright © 2007, Nortel Networks
All Rights Reserved.

Sourced in Canada

The information in this document is subject to change without notice. The statements, configurations, technical data, and recommendations in this document are believed to be accurate and reliable, but are presented without express or implied warranty. Users must take full responsibility for their applications of any products specified in this document. The information in this document is proprietary to Nortel Networks.

The process of transmitting data and call messaging between the CallPilot server and the switch or system is proprietary to Nortel Networks. Any other use of the data and the transmission process is a violation of the user license unless specifically authorized in writing by Nortel Networks prior to such use. Violations of the license by alternative usage of any portion of this process or the related hardware constitutes grounds for an immediate termination of the license and Nortel Networks reserves the right to seek all allowable remedies for such breach.

Trademarks

*Nortel, the Nortel logo, the Globemark, and Unified Networks, BNR, CallPilot, DMS, DMS-100, DMS-250, DMS-MTX, DMS-SCP, DPN, Dualmode, Helmsman, IVR, MAP, Meridian, Meridian 1, Meridian Link, Meridian Mail, Norstar, SL-1, SL-100, Succession, Supernode, Symposium, Telesis, and Unity are trademarks of Nortel Networks.

3COM is a trademark of 3Com Corporation.

ADOBE is a trademark of Adobe Systems Incorporated.

ATLAS is a trademark of Quantum Corporation.

BLACKBERRY is a trademark of Research in Motion Limited.

CRYSTAL REPORTS is a trademark of Seagate Software Inc.

EUDORA and QUALCOMM are trademarks of Qualcomm, Inc.

ETRUST and INOCULATEIT are trademarks of Computer Associates Think Inc.

DIRECTX, EXCHANGE.NET, FRONTPAGE, INTERNET EXPLORER, LINKEXCHANGE, MICROSOFT, MICROSOFT EXCHANGE SERVER, MS-DOS, NETMEETING, OUTLOOK, POWERPOINT, VISUAL STUDIO, WINDOWS, WINDOWS MEDIA, WINDOWS NT, and WINDOWS SERVER are trademarks of Microsoft Corporation.

GROUPWISE and NOVELL are trademarks of Novell Inc.

INTEL is a trademark of Intel Corporation.

LOGITECH is a trademark of Logitech, Inc.

MCAFEE and NETSHIELD are trademarks of McAfee Associates, Inc.

MYLEX is a trademark of Mylex Corporation.

NETSCAPE COMMUNICATOR is a trademark of Netscape Communications Corporation.

NOTES is a trademark of Lotus Development Corporation.

NORTON ANTIVIRUS and PCANYWHERE are trademarks of Symantec Corporation.

QUICKTIME is a trademark of Apple Computer, Inc.

RADISYS is a trademark of Radisys Corporation.

ROLM is a trademark of Siemens ROLM Communications Inc.

SLR4, SLR5, and TANDBERG are trademarks of Tandberg Data ASA.

SONY is a trademark of Sony Corporation.

SYBASE is a trademark of Sybase, Inc.

TEAC is a trademark of TEAC Corporation.

US ROBOTICS, the US ROBOTICS logo, and SPORTSTER are trademarks of US Robotics.

WINZIP is a trademark of Nico Mark Computing, Inc.

XEON is a trademark of Intel, Inc. All other trademarks and registered trademarks are the property of their respective owners.

Publication History

April 2007

CallPilot 5.0, Standard 01.02 of the *Meridian Mail to CallPilot Migration Utility Guide* is issued for general release.

February 2007

CallPilot 5.0, Standard 01.01 of the *Meridian Mail to CallPilot Migration Utility Guide* is issued for general release.

February 2007

CallPilot 5.0, Standard 01.00 of the *Meridian Mail to CallPilot Migration Utility Guide* is issued for general release.

July 2005

CallPilot 4.0, Standard 1.03 of the *Meridian Mail to CallPilot Migration Utility Guide* is issued for general release.

July 2005

CallPilot 4.0, Standard 1.02 of the *Meridian Mail to CallPilot Migration Utility Guide* is issued for general release.

July 2005

Standard 1.01 of the *Meridian Mail to CallPilot Migration Utility Guide* is issued for general release.

July 2005

Standard 1.0 of the *Meridian Mail to CallPilot Migration Utility Guide* is issued for general release.

June 2004

Standard 1.0 of the *Meridian Mail to CallPilot Migration Utility Guide* for CallPilot 2.x is released for general availability. The document has been radically changed, streamlined and updated.

November 2004

Standard 1.0 of the *Meridian Mail to CallPilot Migration Utility Guide* for CallPilot 3.0 is released for general availability. Minor changes, resulted from addressing CRs, have been made to the document

May 2003

Standard 1.0 is released for CallPilot 2.02 (2.01.27.05) to introduce new procedures to migrate Symposium Voice Services (Appendix C) and to introduce the new migrate.exe utility (CallPilot 2.x migrations only) which eliminates the need to run the Application Builder Data Integrity and Repair tool. Additionally, new recovery procedures are provided to resolve precheck failures identified by the new migrate.exe utility (Chapter 5, Section C: Correcting precheck inconsistencies).

October 2002

Standard 3.0 of the CallPilot 2.0 *Meridian Mail to CallPilot Migration Utility Guide* is released for CallPilot 1.07 and CallPilot 2.0 general availability

January 2001

Standard 2.0 version of the *Meridian Mail to CallPilot Migration Utility Guide* for CallPilot 1.07 is released.

April 2000

Standard 1.0 of the *Meridian Mail to CallPilot Migration Utility Guide* (including addendum) for CallPilot 1.07 is released.

Contents

Chapter 1 How to get help	9
Chapter 2 Understanding the migration process	11
Overview	11
Migration task flow	13
Migration limitations	16
Reference documents	18
Chapter 3 Planning a Meridian Mail data collection	19
Meridian Mail releases and platforms that can be migrated	19
Data that can or cannot be migrated	20
Meridian Mail system size	22
Types of data collection	24
Time estimates	25
Collecting data in a single session	26
Collecting data in multiple sessions	27
Meridian Mail data collection check list	31
Chapter 4 Collecting Meridian Mail data	35
Installing the data collection utility	35
Soft keys	38
Launching the data collection utility	39
Collecting Meridian Mail data	41
Collecting Meridian Mail voice messages	47
Collecting Contact Center data	48
Reviewing the Meridian Mail migration log	53
Chapter 5 Migrating Meridian Mail data to CallPilot	55
Hardware, software, media, and networking requirements	55
Staging area	57
Stopping the migration	58
CallPilot migration check list	59
Migration sequence	60
Migrating a system with many voice segments or fax items	61
Migrating Meridian Mail data	61
Migrating Contact Center data	65

Reviewing the migration log and summary	70
Rerunning the migration	75
Using Application Builder to complete the migration of voice services	76
Chapter 6 Performing post-migration tasks	85
Disconnecting the tape drive	85
Verifying CallPilot system configuration	85
Verifying CallPilot network database	88
Replacing Meridian Mail with CallPilot	93
Running Meridian Mail and CallPilot at the same time	94
Chapter 7 Troubleshooting	107
Migration problems	107
Correcting precheck inconsistencies	108
Troubleshooting tools	114
Meridian Mail data collection error messages	115
CallPilot migration error messages	116
Appendix A Meridian Mail and CallPilot comparison	125
Overview	125
CallPilot system setup	127
Comparing switch and server configuration	130
Comparing call routing	136
Comparing networking solutions	140
Comparing Contact Center voice services	141
Comparing Meridian Mail and CallPilot terminology	143
Appendix B CallPilot migration command reference	147
Using the CallPilot migration utility	147
Index	152

Chapter 1

How to get help

This section explains how to get help for Nortel products and services.

Getting Help from the Nortel Web site

The best way to get technical support for Nortel products is from the Nortel Technical Support Web site:

<http://www.nortel.com/support>

This site provides quick access to software, documentation, bulletins, and tools to address issues with Nortel products. More specifically, the site enables you to:

- download software, documentation, and product bulletins
- search the Technical Support Web site and the Nortel Knowledge Base for answers to technical issues
- sign up for automatic notification of new software and documentation for Nortel equipment
- open and manage technical support cases

Getting help over the phone from a Nortel Solutions Center

If you don't find the information you require on the Nortel Technical Support Web site, and have a Nortel support contract, you can also get help over the phone from a Nortel Solutions Center.

In North America, call 1-800-4NORTEL (1-800-466-7835).

Outside North America, go to the following Web site to obtain the phone number for your region:

<http://www.nortel.com/callus>

Getting Help from a specialist by using an Express Routing Code

To access some Nortel Technical Solutions Centers, you can use an Express Routing Code (ERC) to quickly route your call to a specialist in your Nortel product or service. To locate the ERC for your product or service, go to:

<http://www.nortel.com/erc>

Getting Help through a Nortel distributor or reseller

If you purchased a service contract for your Nortel product from a distributor or authorized reseller, contact the technical support staff for that distributor or reseller.

Chapter 2

Understanding the migration process

In this chapter

"Overview" (page 11)

"Migration task flow" (page 13)

"Migration limitations" (page 16)

"Reference documents" (page 18)

Overview

About this guide

This guide provides guidelines and detailed information for the migration of a Meridian Mail* system to a CallPilot system. You must have a good knowledge of the Meridian Mail and CallPilot systems to be able to perform a migration. For a comparison of Meridian Mail and CallPilot, refer to [Appendix "Meridian Mail and CallPilot comparison" \(page 125\)](#).

Introduction to the migration process

A migration from Meridian Mail to CallPilot* consists of two major steps:

- collection of Meridian Mail data on tape
- transfer of the collected data from tape to CallPilot

The number of tapes necessary for a migration depends on the size of the Meridian Mail system.

During a migration from Meridian Mail to CallPilot, both systems must be out of service for a variable period of time. The length of this period depends on the system size, data volume, and number of users that must be migrated.

The Meridian Mail system still accepts calls and messages after the data collection.

Note: To comply with the Restriction of Hazardous Substances (RoHS) Directive 2002/95/EC, some of the part numbers now contain an E5 or E6 suffix. For example, part number NTRH2014 is now NTRH2014E6. The part numbers in this guide do not contain the suffix.

ATTENTION

If you are migrating to a T1/SMDI system, DNs presented over the SMDI must be 10 digits in length. Unlike Meridian Mail, CallPilot does not support the left pad feature which allows for shorter DN lengths. For further information, see the *T1/SMDI and CallPilot Server Configuration* guide (NN44200-303).

Meridian Mail data

Two types of Meridian Mail data can be migrated to CallPilot:

- system data
 - user data (including voice greetings)
 - system profiles
 - networking data
 - voice services—voice menus, voice services, and announcements
- message data—voice messages (Contact Center prompts are also considered to be message data.)

The CallPilot migration utility allows you to migrate all the Meridian Mail information to CallPilot or to perform a selective migration. In a selective migration, you can migrate each of the following data sets individually:

- messages
- messages and Contact Center prompts
- Contact Center prompts only
- system data
 - system and customer profiles
 - networking data
 - restriction/permission lists (RPL)
 - classes of service (COS)
- users
- voice services (Application Builder applications on CallPilot)

- voice menus
- voice services
- announcements

Note: Meridian Mail Thru-Dial services cannot be migrated to CallPilot.

- system distribution lists (SDL)
- personal distribution lists (PDL)

Migration rules

Follow these general migration rules to minimize system downtime:

- Perform the data collection during one or more off-hour periods.
- Perform the following after collecting Meridian Mail data on tape:
 - freeze Meridian Mail configuration changes.
 - freeze changes to users, RPLs, COSs, networking data, voice menus, voice announcements, and any data that must be migrated.
 - warn users to stop making changes to mailboxes.

Note: Changes made after collecting the Meridian Mail data are not migrated to CallPilot.

- Verify that the data has been migrated to CallPilot.
- Perform the switchover to CallPilot so that CallPilot accepts calls and new messages, and inform users that they must check the CallPilot mailboxes for messages. Before switching the service to CallPilot, take into consideration the following issues:
 - After the switchover, Meridian Mail no longer answers calls and takes new messages.
 - The messages stored on the Meridian Mail system are available only after the completion of the migration to CallPilot.
 - Users can retrieve messages from Meridian Mail if you run both systems in parallel for a limited time.

Migration task flow

The following table summarizes the migration task flow:

Step	Task	Check
1	Ensure that you have the most recent version of the Meridian Mail to CallPilot migration tape.	<input type="checkbox"/>

Step	Task	Check
2	Complete the Meridian Mail preparation checklist.	<input type="checkbox"/>
3	Courtesy down the Meridian Mail system.	<input type="checkbox"/>
<div style="border: 1px solid black; padding: 10px; display: inline-block;">  <p>CAUTION Risk of reduced system performance Do not run the data collection utility while the Meridian Mail system is online.</p> </div>		
4	Install the data collection utility from tape on Meridian Mail and then restart the Meridian Mail system.	<input type="checkbox"/>
5	Determine the data collection method: full data collection or selective data collection.	<input type="checkbox"/>
6	Launch the data collection utility.	<input type="checkbox"/>
7	Collect Meridian Mail system data on one or more tapes.	<input type="checkbox"/>
8	Collect Meridian Mail voice messages, as well as Contact Center voice prompts and voice segments, on one or more tapes.	<input type="checkbox"/>
9	Review the Meridian Mail data collection log to find any data collection errors.	<input type="checkbox"/>
10	Install an external tape drive and the tape drive driver on the CallPilot server (if necessary).	<input type="checkbox"/>
<p>Note: The CallPilot tower and rackmount servers are supplied with an internal tape drive installed.</p>		
11	Complete the CallPilot migration preparation checklist.	<input type="checkbox"/>
12	Transfer the Meridian Mail data to CallPilot.	<input type="checkbox"/>
13	Transfer the voice messages and the Contact Center voice prompts and segments to CallPilot.	<input type="checkbox"/>

Step	Task	Check
20	Disconnect the external tape drive from the CallPilot server if you installed a tape drive in Step 10.	<input type="checkbox"/>
21	If you use CallPilot with a Meridian 1 or Communications Server 1000 (formerly known as CS 1000) switch, you must replace the MGate card in the switch with an NTRB18CA MGate card.	<input type="checkbox"/>
22	Put CallPilot into operation.	<input type="checkbox"/>
23	Re-enable event throttling if you disabled it while performing the tasks in the CallPilot migration utility check list.	<input type="checkbox"/>

Migration limitations

System limitations

Consider the following limitations before starting a migration:

- You cannot cancel the creation of a Meridian Mail data collection tape.
- You can perform a selective migration only for the following reasons:
 - The Meridian Mail system to be migrated has more than 7000 users.
 - The Meridian Mail system is an MSM.
 - The customer requested a selective migration.
- Ensure that the CallPilot system is operational before performing the migration. The migration utility does not verify the CallPilot system sanity and hardware/software configuration.

Contact Center prompt migration limitations

File names

When Contact Center prompts are migrated to CallPilot, the CallPilot migration utility creates an Application Builder application for each prompt file. The name assigned to the application is the Meridian Mail prompt file name.

If Contact Center prompts exist in more than one mailbox on Meridian Mail, the data collection utility appends the mailbox number to the file name. In this case, you must do one of the following:

- Use Application Builder to rename the application in CallPilot.
- Update the script if the file name is hard-coded, or upgrade the variable if the voice segment is specified in a variable on the Contact Center.

If the prompt file name and mailbox combinations result in file names that are not unique, the Meridian Mail data collection utility does not collect the prompts in the files with duplicate names.

Segment titles and descriptions


The CallPilot Application Builder segment titles and descriptions are shorter than the Meridian Mail segment titles and descriptions. When an application is created during the migration, the following changes occur:

- segment titles are truncated to 30 characters (from a maximum of 56).
- segment descriptions and scripts are truncated to 255 characters (from a maximum of 2048).

Reference documents



CallPilot Customer Documentation Map

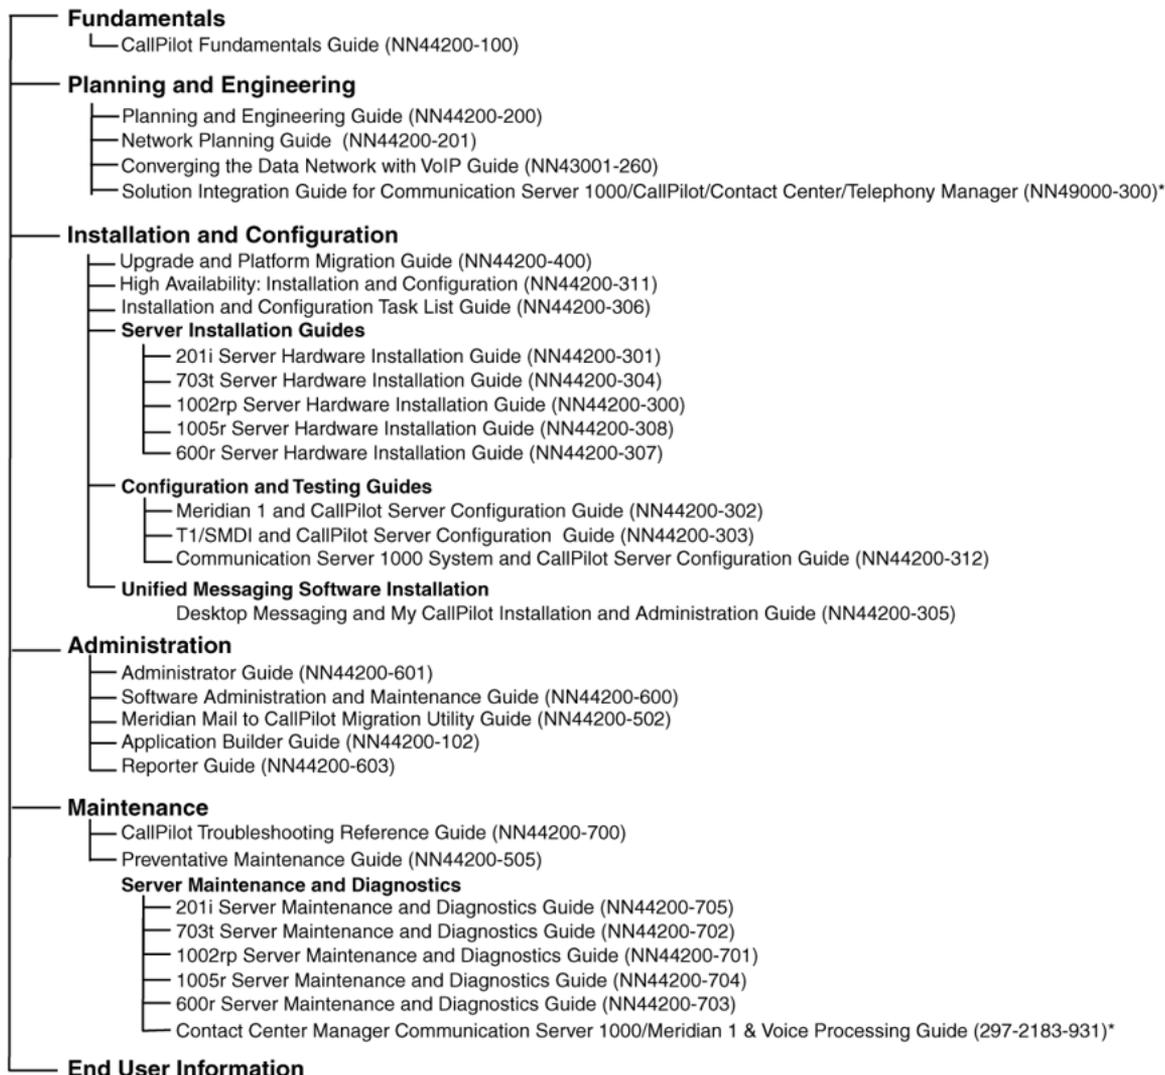

End User Cards

- Unified Messaging Quick Reference Card
- Unified Messaging Wallet Card
- A-Style Command Comparison Card
- S-Style Command Comparison Card
- Menu Interface Quick Reference Card
- Alternate Command Interface Quick Reference Card

End User Guides

- Multimedia Messaging User Guide
- Speech Activated Messaging User Guide
- Desktop Messaging User Guide for Microsoft Outlook
- Desktop Messaging User Guide for Lotus Notes
- Desktop Messaging User Guide for Novell Groupwise
- Desktop Messaging User Guide for Internet Clients
- Desktop Messaging User Guide for My CallPilot
- Voice Forms Transcriber User Guide

**available in summer 2007*

Chapter 3

Planning a Meridian Mail data collection

In this chapter

"Meridian Mail releases and platforms that can be migrated" (page 19)

"Data that can or cannot be migrated" (page 20)

"Meridian Mail system size" (page 22)

"Types of data collection" (page 24)

"Time estimates" (page 25)

"Collecting data in a single session" (page 26)

"Collecting data in multiple sessions" (page 27)

"Meridian Mail data collection check list" (page 31)

Meridian Mail releases and platforms that can be migrated

You can migrate data from Meridian Mail systems running Release 11 and later to CallPilot.

To migrate data from Meridian Mail systems running releases 8, 9, and 10, you must upgrade the systems to Meridian Mail Release 11 or later before performing the migration to CallPilot. For information on comprehensive upgrades, refer to the most recent release of the *Meridian Mail System Installation and Modification Guide*.

The following table summarizes the Meridian Mail platforms and releases that can be migrated to CallPilot.

Meridian Mail platform	Meridian Mail releases			
	11	12	13	13.14
Card Option	Yes	Yes	No	Yes
Enhanced card option	No	Yes	Yes	Yes
Option EC 11	Yes	Yes	Yes	Yes
Compact Option	Yes	Yes	Yes	Yes
Modular Option	Yes	Yes	Yes	Yes
Modular Option EC	Yes	Yes	Yes	Yes
Modular Option GP	Yes	Yes	Yes	Yes
MSM	Yes	Yes	N/A	N/A

Data that can or cannot be migrated

The following table details the system data that can and cannot be migrated from Meridian Mail to CallPilot.

System data

Can be migrated	Cannot be migrated
<ul style="list-style-type: none"> • system and customer profiles • system name and greetings • restriction/permission lists • networking data • classes of service (COS) • messaging settings 	<ul style="list-style-type: none"> • language structure conversion • Hacker Monitor/Alarm Monitor • SEER remap data • hospitality • backup schedules • voice forms • voice menu structure (voice link information) • VMUIF systems • family submailboxes • VSDN table and any other voice service information

Note 1: CallPilot currently supports only one customer. Mailboxes with the same numbers that exist in different customer groups are not migrated.

Note 2: CallPilot does not support the remote notification COS feature.

Can be migrated	Cannot be migrated
<ul style="list-style-type: none"> • local voice users • personal greetings (internal, external and temporary) • personal distribution lists (PDL) • user core and mailbox properties • multiple MWI settings of mailboxes on Meridian Mail • duplicate DNs — Meridian Mail users with duplicate primary and secondary DN entries • user voice messages • networking sites and locations (local and remote) if the networking feature is included in the CallPilot keycode • networking/AMIS configurations and network dialing defaults • Enterprise networking delivery parameters • area and exchange codes • delivery to telephone (DTT) parameters • delivery to fax (DTF) parameters 	<ul style="list-style-type: none"> • hardware information (such as channel allocation table, SMDI link information, and T1/E1 link information) • multicustomers (see note 1) • some Meridian Mail 13 outcalling remote notification defaults (see note 2) • user mailboxes that are less than three digits in length • user mailboxes that contain punctuation marks in the last name • RN schedules • personal COSs — on Meridian Mail, change the personal COS to a dummy COS for migration to CallPilot • users with personal COSs • sites with duplicated names • switch locations with duplicated names • translation tables

Note 1: CallPilot currently supports only one customer. Mailboxes with the same numbers that exist in different customer groups are not migrated.

Note 2: CallPilot does not support the remote notification COS feature.

Can be migrated	Cannot be migrated
<ul style="list-style-type: none"> • system distribution lists (SDL) • remote voice users • directory entry users • personal verification recording 	<ul style="list-style-type: none"> • SDLs with names that contain punctuation marks • SDLs that are less than three digits in length
<ul style="list-style-type: none"> • voice segments in menus • announcements • fax segments 	<ul style="list-style-type: none"> • menu structure • Thru-Dial services

Note 1: CallPilot currently supports only one customer. Mailboxes with the same numbers that exist in different customer groups are not migrated.

Note 2: CallPilot does not support the remote notification COS feature.

The following table details the message data that can and cannot be migrated from Meridian Mail to CallPilot.

Message data

Can be migrated	Cannot be migrated
<ul style="list-style-type: none"> • voice messages that are present in each user's mailbox 	<ul style="list-style-type: none"> • non-delivery notifications • system messages
<ul style="list-style-type: none"> • Contact Center prompts that are present in each user's mailbox 	<ul style="list-style-type: none"> • Not applicable

Meridian Mail system size

This section provides guidelines only for common migration situations. You can ensure a smooth transition if you evaluate and plan the migration carefully.

General

When planning a data collection, evaluate your Meridian Mail system and determine its size. The Meridian Mail systems can be classified into the following four categories:

- small systems
- large systems
- very large systems
- systems with many voice services or fax services (or both), or essential services (such as product support voice menus)

Note: On Meridian Mail, voice services are called "voice segments." On CallPilot, voice services are called "applications."

Determining the Meridian Mail system size

To determine the size of your Meridian Mail system, you must know the number of hours of storage in use on the system. You can find this information in the system status information section of the maintenance screen. Refer to your Meridian Mail documentation for more details.

The following table summarizes the Meridian Mail system categories and provides information on the type of CallPilot system to which data can be transferred:

Size	Storage hours	CallPilot server	Migration time
Small	up to 200	any model	Up to 24 hours
Large	more than 200	<ul style="list-style-type: none"> • 201i server (350 hours) • 703t server (1200 hours) • 1002rp server (2400 hours) • 1005r server (2400 hours) • 600r server (1200 hours) 	Up to 48 hours
Very large	more than 2400	A Meridian Mail system with more than 96 ports and 2400 hours of storage is too large for a single CallPilot system. Contact your distributor or Nortel for information on the appropriate migration strategy.	

Systems with many voice segments or fax items

Voice segments and Application Builder applications

If a Meridian Mail system has many voice or fax segments, you can perform the migration in multiple sessions.

The voice segments or fax items of a Meridian Mail system must be converted to CallPilot Application Builder applications. The migration utility migrates the Meridian Mail voice segments and fax items to CallPilot, but it does not create CallPilot applications. You must create or rebuild CallPilot applications using Application Builder.

Maximum number of Application Builder applications

When migrating voice segments, take into account the maximum number of Application Builder applications supported on the CallPilot server.

CallPilot server	Maximum number of applications	Server volumes where the applications reside
201i	500	VS1
703t	2500	VS1, VS102, VS103
1002rp	2500	VS1, VS102, VS103
1005r	2500	VS1, VS102, VS103
600r	2500	VS1, VS102, VS103

The migration fails if you attempt to migrate more voice segments than the maximum number of Application Builder applications supported on the CallPilot server.

Types of data collection

This guide refers to system data and voice message data. System data includes all data groups, except voice messages and Contact Center prompts.

Full data collection

A full data collection collects all system data at one time, and then all voice messages and Contact Center prompts at one time, on one or more message tapes.

Selective data collection

Selective data collection allows you to gather information from the following groups individually:

- system data — system and customer profiles, restriction/permission lists (RPL), and classes of service (COS)
- network data
 - You can collect system data and network data on one tape.
 - For multicustomer Meridian Mail systems, collect networking data only from the customers with a full set of networking data.

- user data (includes system data and network data)
 - personal distribution lists (PDL)
 - system distribution lists (SDL)
- Note:** You can collect both PDLs and SDLs on one tape.
- voice segments (voice menus, voice services and announcements) and fax item data

ATTENTION

You must select and collect the data groups in the sequence indicated in the preceding list.

Use selective data collection if one of the following conditions applies:

- The Meridian Mail system has more than 3000 users and more than 200 hours of messages stored.
- The Meridian Mail platform is an MSM.
- The customer requested a selective data collection.

IF you are performing	THEN
a large system migration	<ul style="list-style-type: none"> • collect the system data on one or more tapes. • collect the voice messages and Contact Center prompts on one or more tapes.
a large-volume selective migration	<ul style="list-style-type: none"> • collect system data on tapes. • collect voice messages and Contact Center prompts by volume, COS or department using one tape for each group.

Time estimates

The following table shows the estimated times for data and message collection based on the number of users.

Migration activity	500 users	3500 users
One-time migration for each customer group		
Data collection	20 minutes	90 minutes

Migration activity	500 users	3500 users
Message and Contact Center prompt collection	2 minutes for each hour of voice storage	
Selective migration for each customer group		
Data collection	15 minutes	80 minutes
Message and Contact Center prompt collection	2 minutes for each hour of voice storage	

Schedule the migration for one or more maintenance periods. A maintenance period is the time during which the Meridian Mail system can be taken out of service.

the total migration time is estimated to take	THEN
less than a maintenance period	you can perform the migration in one session.
more than a maintenance period	you must perform the migration in several sessions.

Ensure that a schedule of the migration process is announced to the users.

Collecting data in a single session

Overview

This section provides recommendations for collecting data for small and large systems in one session.

Collecting data for a small system

Small systems are migrated by volume using full data collection on two tapes.

Tape number	Data
1	<ul style="list-style-type: none"> system data — includes system and customer profiles, networking data, RPLs and COSs user data personal distribution lists system distribution lists voice segments and fax items
2	voice messages and Contact Center prompts for each volume

Collecting data for a large system

When migrating a large Meridian Mail system in a single session, perform a selective data collection on three or more tapes.

Tape number	Data
1	system data — includes system and customer profiles, networking data, RPLs and COSs
2	voice segments (voice services, menus or announcements) and fax items
3	<ul style="list-style-type: none"> • user data • voice messages and Contact Center prompts for each collected volume

ATTENTION

Collect the SDLs and PDLs on the last tape to ensure that they are migrated last to CallPilot. If you migrate the SDLs and PDLs to CallPilot before all users are migrated, the SDLs and PDLs can contain invalid addresses on CallPilot.

Collecting data in multiple sessions

Overview

A large system cannot be always migrated in a single maintenance period. To minimize the migration impact, carefully plan and schedule the migration over several sessions.

ATTENTION

A Meridian Mail system with more than 96 ports and 2400 hours of storage is too large to be migrated to a single CallPilot system. Contact your distributor or Nortel for information on the appropriate migration strategy.

When migrating a Meridian Mail system in multiple sessions, perform a selective data collection by one of the following criteria:

- department
- mailbox
- class of service

You need three tapes for the first data collection session and two tapes for each subsequent session.

Add new users carefully to the Meridian Mail system so that their mailboxes and voice messages are captured at some stage during the data collection.

The total message capacity can exceed 2.5 Gbytes if all the messages on the system are collected in one session. Nortel recommends that you collect voice messages and Contact Center prompts in stages; for example, based on volume or department. Each volume or department must fit on a single tape.

Migrating a large system by department

To migrate a system by department, complete the department field in the data collection utility on Meridian Mail and perform the migration in multiple sessions.

Data collection: session 1

Tape number	Data
1	<ul style="list-style-type: none"> system data (includes system and customer profiles, networking data, RPLs, and COSs) voice segments and fax item data
2	user data for the departments collected in session 1
3	voice messages and Contact Center prompts for the departments collected in session 1 Note: Depending on department size and usage, store data from multiple departments on the same tape during the same collection session.

Data collection: session 2

Tape number	Data
4	user data for the departments collected in session 2

Tape number	Data
5	<ul style="list-style-type: none"> • voice messages and Contact Center prompts for the departments collected in session 2 • system distribution lists (SDL) • personal distribution lists (PDL)

ATTENTION

Collect SDLs and PDLs in the last session to ensure that they are migrated last to CallPilot. If you migrate the SDLs and PDLs to CallPilot before all users are migrated, the SDLs and PDLs can contain invalid addresses on CallPilot.

Subsequent data collection sessions (if required)

For each additional session that is required, use two tapes for each department:

- one tape for user data
- one tape for the corresponding voice messages and Contact Center prompts

Migrating a large system by COS or mailbox range

Use one of the following methods to migrate a system by mailbox range:

- Specify one or more mailbox ranges by using the plus sign (+) or underscore (_) as wildcard characters in the data collection utility.
- Assign mailboxes to a specific COS.

Note: Assign groups of users to a COS using the Assign To COS function available in the Find local voice users screen.

Guidelines for assigning a range of mailboxes to a COS

If you change a user's COS for migration purposes, the new COS overrides the original COS information, which must be reconstructed on the CallPilot system.

A user is assigned to a COS in about five seconds. When you move many users to a new COS, the directory can become unbalanced and affect system performance. Perform a DR audit to rebalance the directory at the end of each session.

The number of users (DNs) that you can assign to a COS depends on the length of the available maintenance period.

To calculate the number of users that you can assign to a COS (x), use the following formula:

$$x = \frac{\text{users}}{\text{hours}} \times 200 \text{ hours}$$

where

- "users" is the total number of users on the system
- "hours" is the actual number of storage hours used on the system

For example, in a system with 10 000 users and 1000 hours used, you can assign 2000 users to a COS. It takes about three hours to create a COS and to assign users to it. You must also consider the time required to transfer the actual data.

These guidelines assume that each group of users assigned to a COS has an average voice storage usage. If you find that a group of users significantly exceeds the average voice storage usage, you can break that group into two or more COSs.

Data collection: session 1

Tape number	Data
1	<ul style="list-style-type: none"> • system data — includes system and customer profiles, networking data, RPLs and COSs • voice segments (voice services, menus, or announcements) and fax items
2	user data for the COSs or mailboxes collected in session 1
3	voice messages and Contact Center prompts for the COSs or mailboxes collected in session 1

Data collection: session 2

Tape number	Must contain the following data
4	user data for the COSs or mailboxes collected in session 2

Tape number	Must contain the following data
5	<ul style="list-style-type: none"> • voice messages and Contact Center prompts for the COSs or mailboxes collected in session 2 • SDLs • PDLs

ATTENTION

Collect the SDLs and PDLs in the last session to ensure that they are migrated last to CallPilot. If you migrate the SDLs and PDLs to CallPilot before all users are migrated, the SDLs and PDLs can contain invalid addresses on CallPilot.

Subsequent data collection sessions (if required)

For each additional session that is required, use two tapes for each COS or mailbox range:

- one tape for user data
- one tape for the corresponding voice messages and Contact Center prompts

Meridian Mail data collection check list

Complete the following tasks before you begin the Meridian Mail data collection.

Item	Check
Review the system event and error reports (SEER) to <ul style="list-style-type: none"> • ensure that the data you want to collect is clean and consistent • verify that no reported problems affect the system or the files 	<input type="checkbox"/>

The SEERs of classes 11, 31, and 66 indicate format errors or disk corruption. If these SEER classes are reported, communicate the errors to the Nortel support personnel group to verify that the migration can take place.

Item	Check
Review user mailboxes and ensure that: <ul style="list-style-type: none"> • the length of each mailbox number is of three or more digits. • each mailbox has a unique DN. 	<input type="checkbox"/>
Verify that the Remote Notification Pin Terminator field does not contain a digit.	<input type="checkbox"/>
CallPilot supports only the # sign or a space as a pin terminator.	
Review the RPL names and ensure that each RPL name is unique.	<input type="checkbox"/>
Review the SDL names and ensure that: <ul style="list-style-type: none"> • the SDL names do not contain punctuation. • each SDL name is unique. 	<input type="checkbox"/>
Ensure that last names are defined in the Meridian Mail Directory Entry Users.	<input type="checkbox"/>
<p>The last name field is mandatory in CallPilot. A migrated user whose last name field was empty in Meridian Mail cannot be selected in CallPilot Manager.</p>	
<p>Note: The data collection utility collects empty first name fields and identifies them in CallPilot as FN0000, FN0001, and so on.</p>	
Review the SDL numbers and ensure that the length of each SDL number is of three or more digits.	<input type="checkbox"/>
Review COS names and ensure that each COS name is unique.	<input type="checkbox"/>
If you want to migrate Meridian Mail users with personal COS: <ul style="list-style-type: none"> • create a new dummy COS and then reassign users to the new COS. • reassign the users to another existing COS. 	<input type="checkbox"/>
<p>For instructions on adding a COS and on reassigning users to the new COS, refer to the <i>Meridian Mail System Administration Guide</i>.</p>	

Item	Check
Review the DN entries for the following errors:	<input type="checkbox"/>
<ul style="list-style-type: none"> • typographical errors on secondary DNs • duplicate primary and secondary DNs • obsolete entries that can conflict with current entries 	
Correct all the errors that you find in the DN entries.	
Verify that the number of Meridian Mail voice segments does not exceed the number of Application Builder applications supported by the CallPilot server; refer to " Systems with many voice segments or fax items " (page 23). You can delete any voice segments that are no longer used.	<input type="checkbox"/>
Ensure that the Contact Center prompt file names are unique. If Contact Center prompts exist in more than one mailbox on Meridian Mail, the data collection utility appends the mailbox number to the file name. If the prompt file name and mailbox number combination results in file names that are not unique, the prompts in the duplicate files are not collected by the Meridian Mail data collection utility.	<input type="checkbox"/>
Ensure that the network site names and switch location names are unique.	<input type="checkbox"/>
Create a test mailbox on the Meridian Mail system and leave some messages in it. After the migration, check the mailbox on CallPilot to determine if the migration was successful.	<input type="checkbox"/>
Determine the method that you want to use for data collection:	<input type="checkbox"/>
<ul style="list-style-type: none"> • full data collection • selective data collection 	

Item	Check
<p>Ensure that you have enough blank tapes available to store the Meridian Mail data.</p> <p>The number of tapes that you need is based on the size of the Meridian Mail system.</p>	<input type="checkbox"/>
<p>Ensure that the tape drive is installed and operational on the Meridian Mail system.</p>	<input type="checkbox"/>
<p>Ensure that you have the most recent Meridian Mail to CallPilot migration tape. The Nortel migration package contains the most recent migration tape.</p>	<input type="checkbox"/>
<div style="border: 1px solid black; padding: 10px;"><p>CAUTION Risk of reduced system performance Courtesy down the Meridian Mail system before you prepare it for data collection. Do not run the data collection utility while the Meridian Mail system is online.</p></div>	<input type="checkbox"/>

Chapter 4

Collecting Meridian Mail data

In this chapter

"Installing the data collection utility" (page 35)

"Soft keys" (page 38)

"Launching the data collection utility" (page 39)

"Collecting Meridian Mail data" (page 41)

"Collecting Meridian Mail voice messages" (page 47)

"Collecting Symposium Call Center Server data" (page 48)

"Reviewing the Meridian Mail migration log" (page 53)

Installing the data collection utility

Tape drive requirements

Depending on the software release and type of hardware platform, the Meridian Mail system uses one of the following tape drives and tapes:

Tape drive	Tape	Migration use
Archive Viper	250 Mbyte	No
Tandberg SLR4 tape drive (TDC4220)	2.5 Gbyte	Yes



CAUTION

Risk of migration failure

The CallPilot server uses a tape drive that cannot read data from 250 MByte tapes and tapes created with the Archive Viper tape drive.

You must use a Tandberg SLR4 (or later) tape drive and 2.5 Gbyte tapes to create the Meridian Mail migration tapes.

ATTENTION

If the Meridian Mail system to be migrated uses an Archive Viper tape drive or 250 Mbyte tapes, ensure that you take to the customer site a Tandberg SLR4 (TDC4220) tape drive and a supply of 2.5 Gbyte tapes.

Migration utility version

The Meridian Mail to CallPilot migration package supplied by Nortel contains the most recent migration utility tape. However, before starting the installation procedure, ensure that you have the newest version of the migration utility.

To install the Meridian Mail data migration utility

Step Action

ATTENTION

Ensure that you know what Meridian Mail release is installed on your system before you begin the procedure.

- 1 In the System Status and Maintenance menu, select the System Status screen and courtesy down your Meridian Mail system.

ATTENTION

On Card Option systems, disable the application module link (AML) before you turn off the power to Meridian Mail.

- 2 Depending on the type of Meridian Mail system, proceed as follows:

IF the Meridian Mail system is	THEN
a Card Option with external tape drive	<ul style="list-style-type: none"> • turn on the tape drive • insert the migration tape
running Meridian Mail Release 11 or later	insert the migration tape into the tape drive

- 3 Power down Meridian Mail or, if your system has an MMP40 card, press the reset button on this card.

Tip: Reset node 1 first, and then reset nodes 2 through 5 in sequence, if applicable.

- 4 Wait ten seconds and then power up the Meridian Mail system.

ATTENTION

If your Meridian Mail system is a Card Option systems, re-enable the AML after turning on the power.

Result: Meridian Mail displays diagnostic routines and then pauses for approximately five minutes while the tape is automatically retensioned.

Tip: The tape retensioning takes about five minutes. The data preparation software is loaded from the tape in about one minute. Monitor the status of the retensioning process by using your watch to check the time and by listening to the tape drive.

When the data preparation software is loaded, the CallPilot Data Collection Utility Preparation Menu appears.

CallPilot Data Collection Utility Preparation Menu

- 1 Preparation for MM11 System
- 2 Preparation for MM12 System
- 3 Preparation for MM13 System
- 4 Preparation for MM13,14 System
- 5 EXIT to support level

Please enter the operation number: █

- 5 Enter the number that matches the release of your Meridian Mail system and then press **Enter**.

Result: A confirmation prompt appears.

Example: If your system is Meridian Mail 13, the following confirmation prompt appears:

```
You have chosen to Prepare for data migration of this
MM13 system.
Do you want to continue?
```

- 6 Select Yes and then press **Enter**.

Result: The system begins to copy the files and displays the following message:

```
Starting RW100 server and copy file utility files from
the Tape to the Meridian Mail hard disk.
```

When the data collection utility files are copied, the following message appears:

```
Please remove CallPilot Data Collection Preparation
tape and reboot system into full service and continue
data migration by logging into tools level.
```

- 7 Remove the data collection utility tape and restart the Meridian Mail system.
- 8 Perform a sanity check of the system; for example, call a mailbox and leave a message.


IF the sanity test	THEN
passed without problems	continue with "To launch the data collection utility" (page 39).
failed because a problem occurred, such as no ring	return to step Step 1.

—End—

Soft keys

During the collection of Meridian Mail data, you are instructed to select soft keys. The soft keys are the black buttons at the bottom of the screens of the migration utility. The functions of the soft keys that appear on a specific screen depend on the information displayed on that screen.

To select a soft key, you must press a function key on your keyboard. The soft keys are associated, from the left to the right of the screen, with the **F1** through **F5** keys. The following illustration shows the relationship between the soft keys and the function keys.

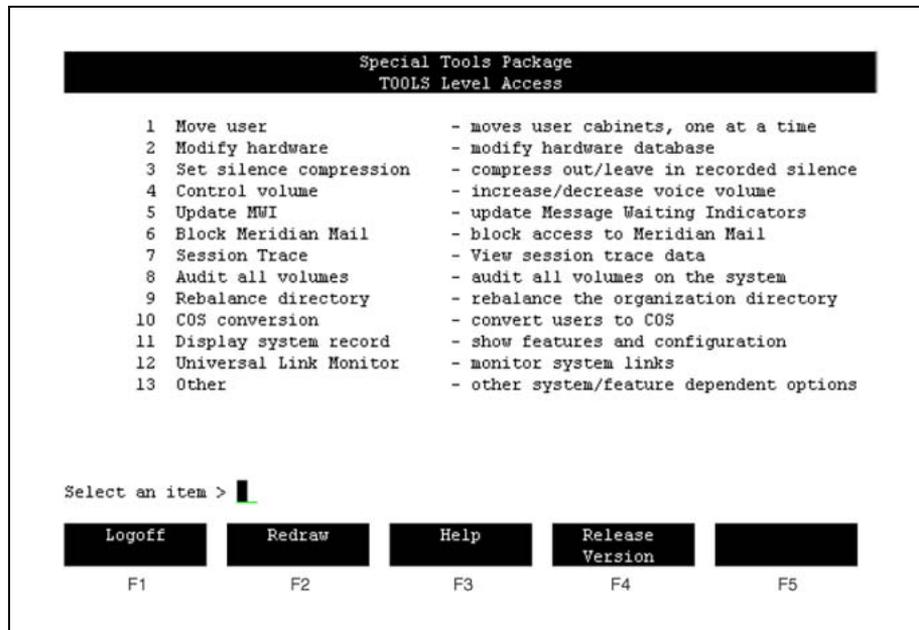

Launching the data collection utility

The screens on your Meridian Mail system can differ from those shown in this guide, depending on the Meridian Mail release number and the type and number of features installed.

To launch the data collection utility

Step	Action
1	Log in to the Tools menu on the Meridian Mail administration terminal using the administrator level password. Note: On a Meridian Mail 13 system, use the Tools user ID and the Tools level password.

Result: The following menu appears:

```

Special Tools Package
TOOLS Level Access

1 Move user           - moves user cabinets, one at a time
2 Modify hardware     - modify hardware database
3 Set silence compression - compress out/leave in recorded silence
4 Control volume      - increase/decrease voice volume
5 Update MWI          - update Message Waiting Indicators
6 Block Meridian Mail - block access to Meridian Mail
7 Session Trace       - View session trace data
8 Audit all volumes   - audit all volumes on the system
9 Rebalance directory - rebalance the organization directory
10 CO3 conversion     - convert users to CO3
11 Display system record - show features and configuration
12 Universal Link Monitor - monitor system links
13 Other              - other system/feature dependent options

Select an item > 1

Logoff  Redraw  Help  Release Version

```

- 2 Select the Other menu option as follows: enter the option number (13) at the Select an item prompt and then press **Enter**.

Result: The Other menu appears.

```

Special Tools Package
TOOLS Level Access
System/Feature Dependent Tools

1 Change local site ID - set the site id to a new value
2 Transfer voice prompts - read from/write to tape
3 ACCESS diagnostics - verify ACCESS link is operational
4 Console Port - Modify Console Port Speed
5 Clone Disk - copy disk ID=0 to disk ID=3
6 Collect CallPilot Data - Create CallPilot Data Tape


Select an item > 6

Exit

```

- 3 Select the Collect CallPilot Data option as follows: enter the option number (6) at the Select an item prompt and then press **Enter**.

Result: The Collect CallPilot Data menu appears.

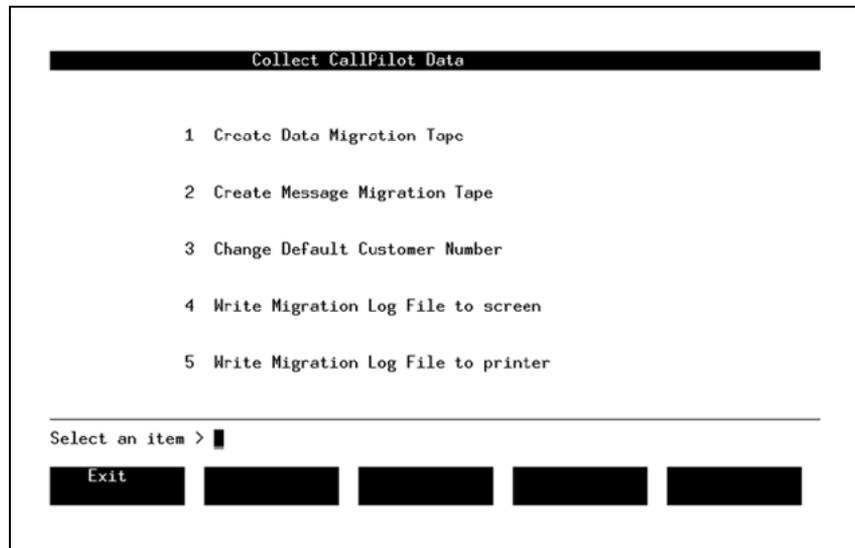


- 4 Continue with one of the following tasks, as required:
- ["Collecting Meridian Mail data" \(page 41\)](#)
 - ["Collecting Symposium Call Center Server data" \(page 48\)](#)
 - ["Reviewing the Meridian Mail migration log" \(page 53\)](#)

—End—

Collecting Meridian Mail data

Preliminary

The procedure provided in this section starts after the data collection utility is launched, as indicated in ["Launching the data collection utility" \(page 39\)](#), and when the following screen is displayed:

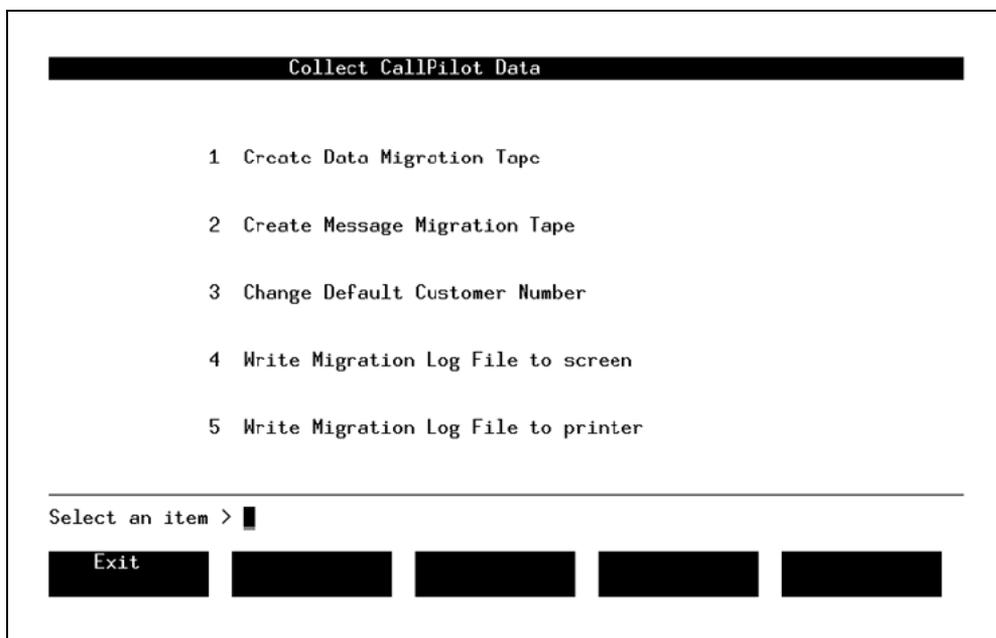


To collect Meridian Mail data

Step	Action
------	--------

- | | |
|---|--|
| 1 | Select the Create Data Migration Tape option on the Collect CallPilot Data screen as follows: enter the option number (1) at the Select an item prompt and then press Enter . |
|---|--|

Result: The following screen appears:

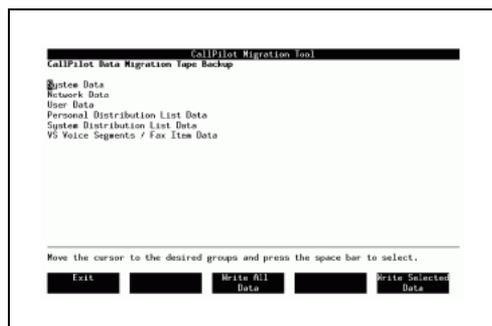

- | | |
|---|---|
| 2 | Select one or more data collection options depending on the system size and the migration strategy that you choose. |
|---|---|

Tip: Use the up and down arrow keys to move the cursor to the desired option, and then press spacebar to select the option.

The following table details the data that each option collects.

Option	Data
System Data	<ul style="list-style-type: none"> • system profiles • customer profiles • security profiles • outdialling defaults • dialing translations defaults
Network Data	<ul style="list-style-type: none"> • network locations • network sites • network delivery profiles
User Data	<ul style="list-style-type: none"> • system data • network data • restriction/permissions lists • COSs • user mailboxes
Personal Distribution List Data	personal distribution lists
System Distribution List Data	system distribution lists
VS Voice Segments / Fax Item Data	<ul style="list-style-type: none"> • voice menus • voice services • announcements • fax items

If you perform a selective data collection, collect the data in the sequence shown on the screen, from top to bottom.

- 3 Select the Write All Data soft key by pressing the **F3** key.
Result: The Selected Users or the Enter Tape Label screen appears.

- 4 Depending on the screen that appeared, proceed as follows.

IF the screen is	THEN
Selected Users	go to step 5.
Enter Tape Label	go to step 10.

- 5 Select a data collection option on the Selected Users screen by using the right or left arrow key.



This screen allows you to collect data for one of the following options.

Option	Collected data
All	All users in the system
Individual	Individual mailboxes by mailbox number
Volume	All mailboxes in the selected volume
COS	All mailboxes in the selected COS
Dept	All mailboxes in the selected department

Note: No data is collected if the None option is selected.

- 6 Press **Enter** or the down arrow key.
Result: A list of fields for the selected option appears on the screen. For example, if you choose the COS option, the following screen appears.



7 Move the cursor to the grid lines by pressing the down arrow key and then enter the required values for the selected option.

Tip: If you want to select one or more ranges of mailbox numbers, you can use the following wildcard characters: plus sign (+) and underscore (_).

- The plus sign (+) matches 0 or more characters or digits. For example, if you type 776+, mailboxes 776, 7761, 7762, 776123, and so on are selected.
- The underscore (_) matches 1 character or digit. For example, if you type 776_, then mailboxes 7761, 7762, and so on are collected. The mailbox numbers 776 and 77612 do not match the entered value and are not collected.

8 Select the Show Summary soft key by pressing **F5** to view a summary of the data items that are collected.

Result: A message indicating the total number of mailboxes selected appears at the bottom of the screen.

9 Select the Continue soft key by pressing **F3**.

Result: The **Enter Tape Label** screen appears.



10 Type a name for the data collection tape.

Tip: The maximum length of the tape name is 27 characters.

11 Insert a blank tape in the tape drive.

- 12 Select the OK to Start Writing Tape soft key by pressing **F1**.

Result: The data collection starts. The data collection progress is displayed on the screen.

Tip: The data tapes for a Meridian Mail system with 700 mailboxes are created in approximately 30 minutes.

The following illustration is an example of screen that appears when the data collection is complete.

```

CallPilot Migration Tool          WORKING..
-----
Rewinding tape
Tape Descriptor Data
System Data
..Network Data
User Data
*
Tape Descriptor Data
End Of Tape Data
Rewinding tape
Please check log file from main menu for any error messages.
Press <Return> to continue...

Enter tape label, insert tape and press OK to start writing tape to proceed.
WARNING : This tape will be over written with new data.

```

- 13 Press **Enter**.
- Result:** The CallPilot Data Migration Tape Backup screen appears.
- 14 Select the Exit soft key by pressing **F1**.
- Result:** The **Collect CallPilot Data** screen appears.
- 15 Remove the tape from the tape drive and then write on the label what the tape contains.
- 16 Continue with one of the following tasks, as required:

IF	THEN refer to
you need to collect Contact Center data	"Collecting Symposium Call Center Server data" (page 48)
you completed the data collection process	"Reviewing the Meridian Mail migration log" (page 53).


—End—

Collecting Meridian Mail voice messages

To collect voice messages


- | Step | Action |
|------|--|
| 1 | Select the Create Message Migration Tape option on the Collect CallPilot Data screen by entering the option number (2) at the Select an item prompt and by pressing Enter . |

Result: The CallPilot Message Migration Tape Backup screen appears.

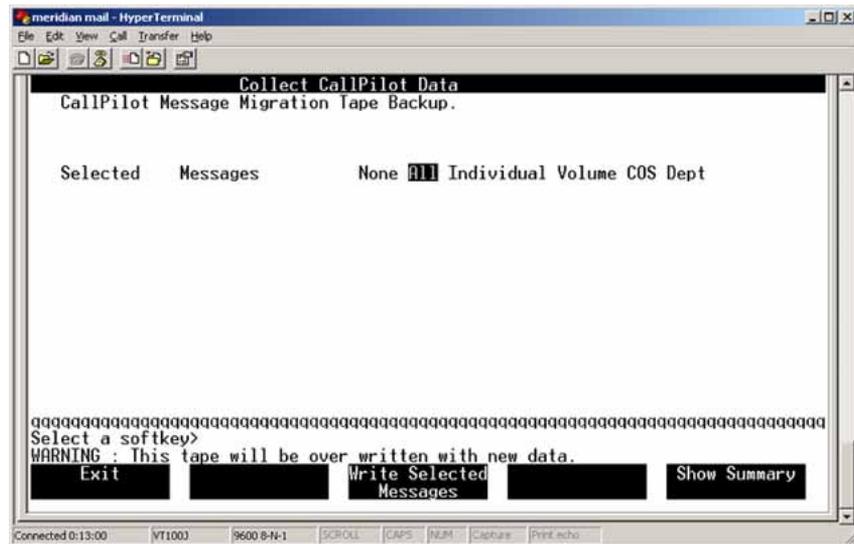

- Use the left or right arrow key or spacebar to move the cursor over the **All** option. This option collects message and prompt data for the mailbox.
- Press **Enter**.

Result: The Enter Tape Label screen appears.

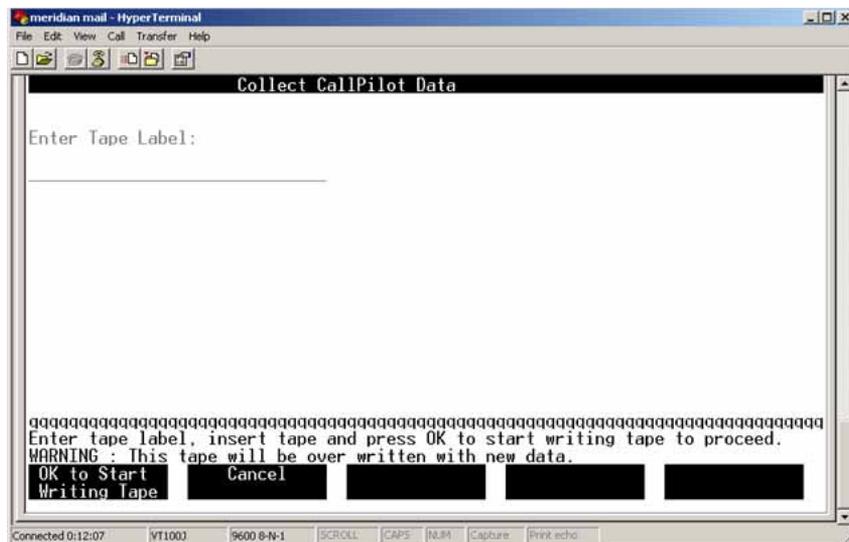

4 Type the following name for the blank tape that you are using:
CallPilot Voice Messages.

5 Insert a blank tape into the Meridian Mail tape drive.

6 Select the OK to Start Writing Tape soft key by pressing **F1**.

Result: The system receives tape descriptor data, then rewinds the tape and writes the prompt data to the tape. When the data collection is complete, the following message appears:

```
Please check log file from main menu for any error
messages
Press <Return> to continue...
```

7 Press **Enter** to continue.

Result: The CallPilot Message Migration Tape Backup screen appears.

8 Select the Exit soft key by pressing **F1**.

Result: The Collect CallPilot Data screen appears.

—End—

Collecting Contact Center data

Overview

Unless you plan to recreate the voice prompts in CallPilot, you must migrate the Meridian Mail voice prompts and voice segments (announcements and menus) to CallPilot.

If you want to migrate only Contact Center prompts to CallPilot, you do not need to create the data migration tape.

Migrating Symposium Call Center services

The voice services implemented on your existing Meridian Mail system determine the data that has to be collected for migration. You have to decide if you want to maintain the same services on CallPilot.

Voice service	Collection data	Remarks
GIVE IVR*	voice prompts (menus and announcements)	Identify the voice prompts in the Meridian Mail VSDN table.
ACCESS	Contact Center prompts	The prompts are stored in specific mailboxes. In Meridian Mail, only one mailbox can be used at a time.
GIVE IVR and ACCESS	<ul style="list-style-type: none"> voice prompts (menus and announcements) Contact Center prompts 	Collect the voice prompts (menus and announcements) first, and then collect the active Meridian Mail mailboxes containing the voice files for ACCESS.

Note: If Meridian Mail is also used as a front-end IVR subsystem, the migration must be treated as a whole voice processing engine migration.

Outline of the Symposium Voice Service Center data collection

The procedure of collecting Symposium Voice Service Center data consists of the following main tasks:

- collecting the voice segment data

If you migrate data for GIVE IVR voice services, which consist of menu and announcement segments, collect the voice segments.
- collecting the user data

The collection of the ACCESS mailboxes that contain voice prompts requires an additional tape.

Meridian Mail screens

The screens on Meridian Mail systems can be different from the screens used to illustrate the following procedures depending on:


- the release number of the Meridian Mail system
- type and number of features installed

Conventions

In the procedures provided in this section, voice segments refer to IVR voice items and voice prompts refer to voice items.

To collect voice segments

This procedure starts after the data collection utility is launched and when the following screen is displayed:

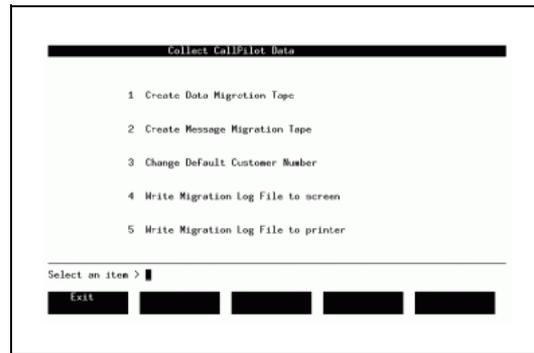


Step Action

- 1 On the Meridian Mail administration terminal, log in to the Tools menu.

Note: On a Meridian Mail 13 system, use the Tools user ID and the Tools level password.

Result: The main **Tools** menu appears.

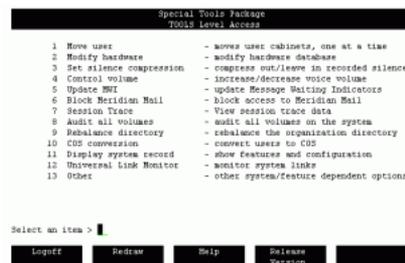


- 2 Select Other by typing the option number at the Select an item prompt.

Result: The **System/Feature Dependent Tools** menu appears.




- 3 Select Collect CallPilot by entering the option number at the Select an item prompt.

Result: The Collect CallPilot Data menu appears.

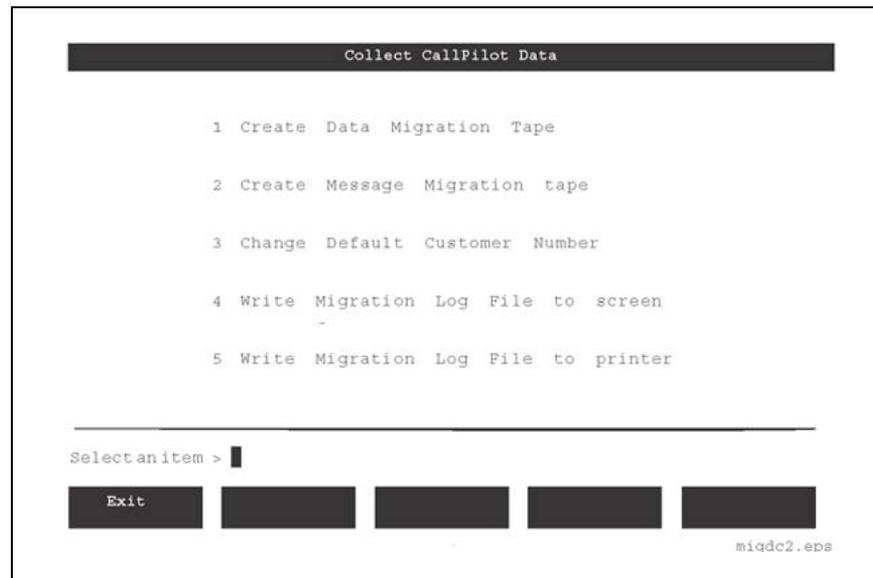

- 4 Select the Create Data Migration Tape option on the Collect CallPilot Data screen as follows: enter the option number (1) at the Select an item prompt and then press **Enter**.

Result: The following screen appears:

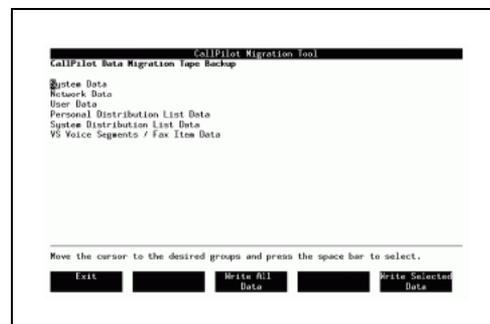

5 Select the VS Voice Segments / Fax Item Data option as follows: press the down arrow key to move the cursor to the option line, and then press spacebar to highlight the option.

6 Select the Write Selected Data soft key by pressing **F5**.

Result: The Enter Tape Label screen appears.



7 Type the following name for the blank tape that you are using: CallPilot Voice Segments (announcements and menus).

Tip: The maximum length of the tape name is 27 characters.

8 Insert a blank tape in the tape drive.

9 Select the OK to Start Writing Tape soft key by pressing **F1**.

Result: The system receives tape descriptor data, then rewinds the tape and writes the segment data to the tape. When the data collection is complete, the following message appears:

```
Please check log file from main menu for any error messages
Press <Return> to continue...
```

10 Press **Enter**.

Result: The CallPilot Data Migration Tape Backup screen appears.

11 Select the Exit soft key by pressing **F1**.

Result: The Collect CallPilot Data screen appears.

12 Remove the tape from the tape drive and write on the label what the tape contains.

—End—


Reviewing the Meridian Mail migration log

Introduction

This section describes the methods of reviewing the Meridian Mail migration log:

- displaying the migration log on the screen
- printing the migration log to a printer

The procedures provided in this section start after that the data collection utility is launched, as indicated in "[Launching the data collection utility](#)" (page 39), and when the following screen is displayed:

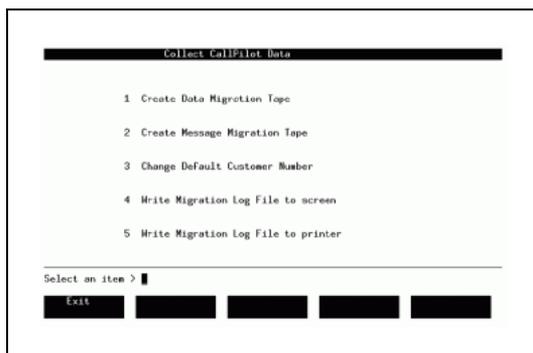

To write the migration log file to the screen

Step	Action
------	--------

- | | |
|---|---|
| 1 | Select the Write Migration Log File to screen option as follows: <ul style="list-style-type: none"> • enter the option number (4) at the Select an item prompt. • press Enter. |
|---|---|

Result: The Meridian Mail Migration log is displayed on the screen from the oldest operation to the most recent operation.

- | | |
|---|---|
| 2 | Identify the log corresponding to your specific data collection by checking the tape label and the data collection start day and time. The following illustration shows a partial example of a migration log: |
|---|---|

```

Meridian Mail Migration logs
-----
Version CallPilot1.0 - 21/Oct/98 13:00 - MM12
Tape Label - 7371
Version CallPilot1.0 - 21/Oct/98 13:00 - MM12
Data Collection for CallPilot begins: 23/10/98 15:20:49
MenuFlags Bitmap = 0
Total Blocks Written = 5780
Total Loc Users      =           1
Total Dir Users      =           0
Total Perm Remote Users =           0
Total Temp Remote Users =           0
Total Spns           =           0
Total Rpls           =           0
Total Cos            =           0
Total Voice Services =           0
Total Group Data     =           44
Press <Return> to continue...

```

—End—

To print the migration log file to the printer

Step	Action
------	--------

- | | |
|---|---|
| 1 | Ensure that an operational printer is connected to your system. |
| 2 | Select the Write Migration Log File to printer option as follows: <ul style="list-style-type: none">• enter the option number (5) at the Select an item prompt• press Enter |

Result: The data collection log file is printed to your printer.

—End—

Log errors

Check the log for any specific errors and information on the total number of voice services (such as voice segments and voice prompts).

If you are satisfied with the content of the migration log file, proceed with the data migration to CallPilot.

Chapter 5

Migrating Meridian Mail data to CallPilot

In this chapter

"Hardware, software, media, and networking requirements" (page 55)

"Staging area" (page 57)

"Stopping the migration" (page 58)

"CallPilot migration check list" (page 59)

"Migration sequence" (page 60)

"Migrating a system with many voice segments or fax items" (page 61)

"Migrating Meridian Mail data" (page 61)

"Migrating Symposium Call Center Server data" (page 65)

"Reviewing the migration log and summary" (page 70)

"Rerunning the migration" (page 75)

"Using Application Builder to complete the migration of voice services"
(page 76)

Hardware, software, media, and networking requirements

Introduction

Ensure that all the required hardware and software are installed on the CallPilot system before migrating the Meridian Mail data from tape.

Safety warnings



DANGER

Risk of electrical shock

Ensure that the tower or rackmount server is powered down before you attempt any installation or removal of components.



CAUTION

Risk of equipment damage due to electrostatic discharge

Use an ESD wristband and attach it as follows:

- to the server chassis when performing any work inside the tower or rackmount server
- to the switch when working with the IPE server

Tower or rackmount server tape drive

The 201i, 703t and 1002rp server must be equipped with a Tandberg SLR50 internal tape drive. The appropriate tape drive driver must be installed on the server.

An external SLR75 tape drive is required for the 1005r and the 600r servers.

The Tandberg SLR50 tape drive can read only 2.5-Gbyte tapes, and cannot read tapes created on Meridian Mail using the Archive Viper tape drive.

ATTENTION

Ensure that the tapes containing the Meridian Mail information are 2.5 Gbyte tapes recorded on a Tandberg SLR4 (TDC4220) or later tape drive.

IPE server tape drive

An external tape drive must be connected to the IPE server, which has a built-in SCSI connector on the faceplate. The appropriate tape drive driver must be installed on the server.

The IPE server supports the Tandberg SLR5 (NTRH9038) tape drive. This tape drive can read the 2.5 Gbyte tapes that are created on a Meridian Mail system using the Tandberg SLR4 (TDC4220) tape drive.

ATTENTION

If a Tandberg SLR5 tape drive is not available, you can temporarily connect the Tandberg SLR4 tape drive used by the Meridian Mail Card Option system to the CallPilot server for performing the migration. You must disconnect the tape drive when the migration to CallPilot is complete.

Networking requirements

If you configure the CallPilot network and assign site and location names before performing the migration, the migration utility does not update the CallPilot sites and locations with the Meridian Mail data.

To ensure that the migration utility updates your network with the Meridian Mail site and location information, change the names of all CallPilot sites and locations to Untitled before starting the migration.

Staging area

Introduction

The CallPilot migration utility offers you the option to copy the collected Meridian Mail files to the CallPilot server before starting the migration. The folder to which the files are copied is referred to as the staging area.

The \nortel\MPCX\Migration\MigrationFiles folder is the staging area.

Nortel recommends that you always transfer the collected files to the staging area established on the CallPilot server to reduce the migration time.

Copying files to the CallPilot server

The following table contains information on copying data from tapes to the CallPilot server.

Data set option	Can be migrated from	
	Tape	Staging area
All system data	yes (data tape)	yes
Messages and Contact Center voice prompts	yes (message tape)	no
Messages only	yes (message tape)	no
Contact Center voice prompts only	yes (message tape)	no
System data (system and customer profiles, networking data, restriction/permission lists and Classes of Service)	yes (data tape)	yes
User data	yes (data tape)	yes
Application Builder services (voice menus, voice services, and announcements)	yes (data tape)	yes
Shared distribution lists	yes (data tape)	yes
Personal distribution lists	yes (data tape)	yes

Deleting files from the staging area

The migration utility offers you the option to delete the files from the CallPilot staging area when the migration is finished.

Nortel recommends that you do not select the option to delete the staging files until you are certain that the migration completes successfully. This saves time if you must rerun the migration.

Stopping the migration

To halt a migration process

To halt a migration process, use one of the following key combinations:

- **Ctrl+C**
- **Ctrl+Break**

To resume a system data migration that is halted

If you halted	THEN to resume the process
a data or message migration process	<ul style="list-style-type: none"> • type <code>migrate -c -d</code> at the command line prompt • press Enter
a transfer to staging area (data migration only)	<ul style="list-style-type: none"> • type <code>migrate -x -c -d</code> at the command line prompt • press Enter

To rerun a message migration that is halted

ATTENTION

If you rerun the message migration, the messages already migrated are duplicated in the CallPilot mailboxes. Delete the already copied messages on CallPilot before you rerun the migration.

To restart a message migration, type `migrate -msg` at the command line prompt, and then press **Enter**.

CallPilot migration check list

Complete the following check list before you start the data migration to CallPilot.

Item	Check
Ensure that the CallPilot system is installed.	<input type="checkbox"/>
Ensure that the switch is configured for CallPilot operation.	<input type="checkbox"/>
Ensure that the CallPilot system is configured and operational.	<input type="checkbox"/>
All installed CallPilot services must be running properly. Dial the Voice Messaging Service DN to ensure that calls can be placed and received.	
Ensure that no users have been added to the CallPilot system.	<input type="checkbox"/>
Ensure that all CallPilot restriction/permission list (RPL) names are unique and different than the Meridian Mail RPL names.	<input type="checkbox"/>
Ensure that all existing CallPilot mailbox classes are renamed. If a duplicate class of service (COS) is found during the migration, the Meridian Mail COS is renamed to <COS name>_MMail<COS ID> and then migrated to CallPilot. As a result, migrated users can be assigned to the wrong mailbox class.	<input type="checkbox"/>
Ensure that Application Builder is installed and operational on CallPilot if you want to migrate voice segments (voice menus, voice services, and announcements), Contact Center prompts, or both.	<input type="checkbox"/>
Ensure that the 201i CallPilot server is connected to an external tape drive or that an external tape drive is available.	<input type="checkbox"/>
Ensure that the tower or rackmount server is equipped with an internal tape drive.	
Change the names of all CallPilot sites and locations to Untitled if you already configured the CallPilot network and want to migrate the Meridian Mail networking data.	<input type="checkbox"/>
Disable event throttling on CallPilot if throttling is enabled.	<input type="checkbox"/>
Ensure that no client applications (including CallPilot Manager and any other software) are running on CallPilot while the migration is in progress.	<input type="checkbox"/>

Migration sequence

Transfer to CallPilot the system data and the voice messages from tapes in the sequence in which you created the tapes on the Meridian Mail system. Always transfer the system data first.

IF you are performing	THEN
a large system migration	<ul style="list-style-type: none"> transfer the system data from one or more tapes. transfer the voice messages and Contact Center prompts from one or more tapes.
Note: If you collected all messages on one tape, then transfer them in a single session.	
a large volume selective migration	<ul style="list-style-type: none"> transfer the system data from tapes. define the Meridian Mail users in CallPilot before migrating voice messages. transfer the voice messages and the Contact Center prompts from the tapes, taking into consideration that data was collected by volume or department using one tape for each group.

Time estimates

The following table shows the estimated time for data and message migration calculated on the basis of the number of users. The time estimates vary depending on the CallPilot server model that is used.

Migration task	500 users	3500 users
One-time migration for each customer group		
Data migration	30–60 minutes for each tape	
Message and Contact Center prompt migration	1.5–2.0 minutes for each hour of voice storage	
Selective migration for each customer group		
Data migration	30–60 minutes for each tape	
Message and Contact Center prompt migration	1.5–2.0 minutes for each hour of voice storage	

Migrating a system with many voice segments or fax items

If a system contains more voice segments or fax items than you can migrate during a maintenance period, perform the migration in multiple sessions. Migrate all voice segments and fax items to CallPilot, and then create the Application Builder applications before you migrate the remaining data.

Session 1: transfer the system data, voice segments, and fax items

Transfer system data (system and customer profiles, networking data, RPLs, and COSs), voice segments, and fax items to CallPilot.

Session 2: create the CallPilot applications

Create the necessary CallPilot Application Builder applications using the migrated voice segments and fax items.

Session 3: transfer the remaining data to CallPilot

Based on the size of your system (that is, on the number of hours of messages), multiple sessions can be required to migrate all users, voice messages and Contact Center prompts. Messages and Contact Center prompts on large systems require at least two migration sessions.

ATTENTION

Ensure that the SDLs and PDLs (collected on the same tape) are migrated last to CallPilot. If you migrate the SDLs and PDLs before all users are migrated, the SDLs and PDLs can contain invalid addresses on CallPilot.

Migrating Meridian Mail data

Migration utility location

The migration utility is located on the CallPilot server hard drive in the \norte\MPCX\Migration folder. You must run the CallPilot migration utility from this folder only. Do not start the migration utility from another folder.

ATTENTION

Do not remove the tape from the tape drive during the migration.

To migrate Meridian Mail data to CallPilot

Step	Action
1	Launch Windows Explorer and navigate to the \norte\MPCX\Migration folder.
2	Double-click the migrate.exe file.

Result: An MS-DOS window opens.

```

c:\D:\Nortel\MPCX\Migration\migrate.exe
Meridian Mail to CallPilot Migration Utility
Nortel Networks, 1998-2000

Before you begin:
Ensure that all existing CallPilot Mailbox Classes are renamed to avoid
conflicts with migrated Meridian Mail Classes of Service (COSs).
The migration process will create a new CallPilot Mailbox Class for every COS,
but if a Mailbox Class of the same name already exists the migrated COS will
be given a new name, and migrated users may then be assigned to the wrong class.

Ensure that all CallPilot Restriction-Permission Lists (RPLs) are either
identical (in name and content) to those in the original Meridian Mail system,
or are renamed to avoid duplication errors. Migration of users will fail if a
CallPilot RPL of the same name is more restrictive.

NBCLI (Library Test Shell) v02.01.0X

CI> _

```

- 3 Insert the appropriate data tape into the tape drive.

ATTENTION

Ensure that you use the tapes in the order in which they were created.

- 4 Type `readtape1` at the `CI>` prompt and then press **Enter**.
Result: The migration utility displays the tape label as you entered it during the data collection. Verify that this is the tape from which you want to transfer data to CallPilot.
- 5 Type `migrate` at the `CI>` prompt in the MS-DOS window and then press **Enter**.

Result: The following prompt appears and displays the first data migration option:

```
Enter Data set to migrate:AllSystemData
```

Tip: Use the arrow down and up keys to view the other migration options that are available:

- Messages_&_SCCSPrompts
- Messages
- SCCSPromptsOnly
- SystemProfiles
- Users
- ApplServices
- SDL
- PDL

- 6 Select the migration option according to your migration strategy. The option that is visible on the screen is considered selected.

Note: Nortel recommends that you migrate the SDLs and PDLs last, after all the mailboxes are migrated. This strategy reduces the number of invalid addresses that can occur in SDLs and PDLs when mailboxes are migrated in more than one session.

- 7 Press **Enter**.

Result: The following message and prompt appear.

```
If you are executing the utility for the first time,
you must copy the data from the MMail tapes to Windows
NT format staging area on the CallPilot server.
Do you wish to copy the Meridian Mail data files now?
Yes
```

Note: Nortel recommends that you always transfer the collected files to the CallPilot staging area to reduce the migration time.

- 8 Select the file transfer option (Yes or No) as follows:

IF	THEN select
the files from this tape are copied for the first time to the CallPilot server, or the files copied from this tape during a previous migration attempt were deleted	Yes
you are rerunning the migration	No

- 9 Press **Enter**.

Result: The following message appears:

```
Do you wish to delete the staging files after migration
is complete? Yes
```

Note: Nortel recommends that you do not delete the staging files until you are certain that the migration completes successfully.

- 10 Press the arrow down key to display No, and then press **Enter**.

Result: The following message appears:

```
During migration, some duplicate users may be found.
Duplicate users are those with matching mailbox number,
location, DN, first name, and last name. What do you
wish to do with the duplicate users?
Delete_them
```

Tip: In addition to the option to delete the duplicate users, the option to leave the duplicate users unchanged (**Skip_them**) is also available. You can display this option by pressing the down arrow key.

11 Select the **Delete_them** or **Skip_them** option according to your migration strategy. The option that is visible on the screen is considered selected.

12 Press **Enter**.

Result: The following message appears:

```
Please insert the Meridian Mail data tape in the tape
drive and press Enter.
```

13 Press **Enter** (you already inserted the data tape into the tape drive).

Result: The migration utility performs the following tasks:

- cleans up the staging area
- starts transferring files from tape to CallPilot

If the migration data set that you select contains voice items (such as announcements and menus) that must be converted to Application Builder applications after the migration, the migration utility launches the precheck application. The precheck application checks the integrity of the existing CallPilot applications created in Application Builder and detects corrupt applications. The following message is displayed on the screen:

```
Premigration system check...
Analyzing System...
```

If the precheck is successful, the migration utility performs the following tasks:

- resumes the file transfer
- displays the migration progress (refer to "[Example of data migration summary](#)" (page 71))
- displays a message and the CI> prompt when the migration is finished

If the precheck is not successful, the migration is stopped and the following message appears:

```
Found inconsistencies! Follow Manual Recovery
Procedure.
Unable to continue migration.
```

Tip: You must repair the corrupt Application Builder applications on CallPilot before attempting another migration. Refer to "[Correcting precheck inconsistencies](#)" (page 108).

The following illustration is an example of screen that shows the precheck (premigration system check) message.

```

D:\Nortel\MPCX\Migration\migrate.exe
Do you wish to copy the Meridian Mail data files now? Yes
Do you wish to delete the staging files after migration is complete? No
During migration, some duplicate users may be found. Duplicate users are those w
ith
matching mailbox number, location, DN, first name and last name.
What do you wish to do with the duplicate users? Skip_them
Please insert the Meridian Mail data tape in the tape drive and then press Enter
>
** Wednesday, March 17, 2004 [11:17:50 PM] **
Cleaning up the MigrationFiles directory ...
The staging files directory is already empty
** Wednesday, March 17, 2004 [11:17:50 PM] **
Transferring the tape files to Windows NT format. Please wait ...

UserTapeLabel: mm12
SystemTapeLabel: Date=4/1/2003 Time=19:18:46
Pre-migration system check ...
Analyzing System...
Starting data migration of System Profile data group ...
The messaging parameters are updated successfully.

```

Tip: If errors occur during the migration process, repeat all or part of the migration. For example, if an "end of tape" error occurs for a tape containing a volume of voice, you must run the migration for that data set. In such a case, repeat the collection of Meridian Mail data. Divide the volume users into two sets (by department or COS), and use multiple tapes.

- 14 Type `quit` at the `Cl>` prompt and then press **Enter**.

Result: A migration transaction log file is created and saved in the `\nortel\MPCX\Migration` folder.

ATTENTION

If you close the MS-DOS window without typing `quit`, the migration transaction log is not created.

—End—

Migrating Contact Center data

General

Perform the tasks associated to the migration of Contact Center data as indicated in the following outline.

Step	Task
1	Migrate the voice segments.
2	Create the CallPilot applications for GIVE IVR voice services.

Step	Task
3	Migrate the user data; this task includes the migration of the ACCESS mailboxes that contain voice prompts.
4	Validate the migrated data and perform any additional tasks required to make the CallPilot configuration consistent with the Meridian Mail configuration

Transfer the messages and the Contact Center prompt information to CallPilot as follows:

IF you collected	THEN transfer
all messages and Contact Center prompts on one tape	all messages and Contact Center prompts on the tape to CallPilot in a single session
messages and Contact Center prompts on multiple tapes (selective message migration)	the messages and Contact Center prompts to CallPilot in multiple sessions using one tape in each session, in the order in which the tapes were created

Useful information

The migration utility allows you to select the data set that you want to migrate to CallPilot in a particular migration session.

Before transferring Contact Center data to the CallPilot server, consider the following migration aspects:

- All users of the voice messages that are to be migrated must be already defined on or migrated to the CallPilot system.
- Voice messages collected from the Meridian Mail system can exceed the available free space on the CallPilot MMFS volume. When less than five percent of the MMFS volume is free, no more messages can be migrated. The migration utility generates logs for this event.
- After the messages are migrated on CallPilot, the messages sent by AMIS users are treated as messages from an unknown source.
- The migration log file shows the details and number of messages, any attachments that are migrated and migration errors.

Handling data that cannot be migrated

For GIVE IVR voice services, the information stored in the Meridian Mail VSDN table and the voice menu structure is critical. As this data cannot be automatically migrated, you must use Application Builder to:

- recreate or rebuild the menu or announcement structure extracted from the VSDN table.

- manage the applications and the control blocks (save and complete them).
- publish the applications in the CallPilot Service DN table.

To migrate Contact Center voice segments and voice prompts to CallPilot

If you perform a selective data collection from Meridian Mail, you must perform a selective data migration to CallPilot.

ATTENTION

Do not remove the tape from the tape drive during the migration.

Step	Action
------	--------

- | | |
|---|---|
| 1 | Launch Windows Explorer and navigate to the \norte\MPCX\Migration folder. |
| 2 | Double-click the migrate.exe file. |

Result: An MS-DOS window opens.

```

ex D:\Nortel\MPCX\Migration\migrate.exe
Meridian Mail to CallPilot Migration Utility
Nortel Networks, 1998-2000

Before you begin:
Ensure that all existing CallPilot Mailbox Classes are renamed to avoid
conflicts with migrated Meridian Mail Classes of Service (COSs).
The migration process will create a new CallPilot Mailbox Class for every COS,
but if a Mailbox Class of the same name already exists the migrated COS will
be given a new name, and migrated users may then be assigned to the wrong class.

Ensure that all CallPilot Restriction-Permission Lists (RPLs) are either
identical (in name and content) to those in the original Meridian Mail system,
or are renamed to avoid duplication errors. Migration of users will fail if a
CallPilot RPL of the same name is more restrictive.

NBCLI (Library Test Shell) v02.01.0X

CI> _

```

- | | |
|---|---|
| 3 | Insert the appropriate data tape in the tape drive. |
| 4 | Type <code>readtape1</code> at the CI> prompt and then press Enter . |

Result: The migration utility displays the tape label as you entered it during the data collection procedure. Verify that this is the tape from which you want to transfer data to CallPilot.

- | | |
|---|---|
| 5 | Type <code>migrate</code> at the CI> prompt and then press Enter . |
|---|---|

Result: The following prompt appears:

```
Enter Data Set to migrate:AllSystemData
```

- 6 Use the up and down arrow keys to display, and select the data set that you want to migrate:

IF you want to migrate	THEN select
voice segments	ApplServices
voice prompts	SCCSPromptsOnly

- 7 Press **Enter**.

Result: The precheck utility checks the integrity of the existing CallPilot applications created in Application Builder and detects corrupt applications. The following illustration is an example of screen that shows the precheck (premigration system check) message.

```

D:\Nortel\MPCX\Migration\migrate.exe
Meridian Mail to CallPilot Migration Utility
Nortel Networks, 1998-2000

Before you begin:
Ensure that all existing CallPilot Mailbox Classes are renamed to avoid
conflicts with migrated Meridian Mail Classes of Service (COSs).
The migration process will create a new CallPilot Mailbox Class for every COS,
but if a Mailbox Class of the same name already exists the migrated COS will
be given a new name, and migrated users may then be assigned to the wrong class.

Ensure that all CallPilot Restriction-Permission Lists (RPLs) are either
identical (in name and content) to those in the original Meridian Mail system,
or are renamed to avoid duplication errors. Migration of users will fail if a
CallPilot RPL of the same name is more restrictive.

NBCLI (Library Test Shell) v02.01.0X

CI> _

```

Depending on the result of the precheck, a message appears.

- a. successful precheck — proceed to Step 8

Analyzing System...

If you are executing the utility for the first time, you must copy the data from the MMail tapes to Windows NT format staging area on the CallPilot server.

Do you wish to copy the Meridian Mail data files now? Yes

- b. unsuccessful precheck — the migration cannot be completed; proceed to ["Correcting precheck inconsistencies" \(page 108\)](#)

Analyzing System...

Found inconsistencies! Follow Manual Recovery Procedure

Unable to continue migration

- 8 Press **Enter** to select Yes.

Note: Nortel recommends that you always transfer the collected files to the CallPilot server to reduce the migration time.

Result: The following message appears on the screen:

```
Do you wish to delete the staging files after migration
is complete? Yes
```

- 9 Use the down or up arrow key to display the No option and press **Enter**.

Note: Nortel recommends that you do not delete the staging files until you are certain that the migration completes successfully.

Result: The system prompts you to insert the data tape.

- 10 Press **Enter** (you already inserted the data tape into the tape drive).

Result: The migration utility reads the tape and starts transferring the data to the staging area. The migration progress is displayed on the screen. When the migration is finished, the systems displays a message and the CI> prompt.

- 11 Type `quit` at the CI> prompt and then press **Enter**.

Result: A migration transaction log file (MigTransaction.log) is created and saved in the \nortel\MPCX\Migration folder.

ATTENTION

If you close the MS-DOS window without typing `quit`, the migration transaction log is not created.

- 12 Check the MigTransaction.log file.

Note: Pay particular attention to the Total Number of Services created or updated successfully.

- 13 If you create any test messages on Meridian Mail, verify that they successfully migrate. Log in to the CallPilot mailbox and review the messages.

—End—

Reviewing the migration log and summary

Migration transaction log

The log file name uses the following convention to define its structure: MigTransaction<yymmddhhmmss>.log, where *yymmdd* represents the date and *hhmmss* represents the time in the 24-hour format. The date and time in the file name allow you to:

- retain logs from previous migration sessions for future consultation.
- distinguish the current migration log from previous migration logs.

The log file provides a summary of the data migrated from the given group, file or field to the specified field in the CallPilot database.

The transaction log indicates the state of the data after migration. This log contains the following information:

- a detailed progress report of the migration
- warning messages
- error messages
- a migration status summary

If you run the migration utility more than once in the same MS-DOS session, the migration transaction log shows cumulative results. Nortel recommends that you clear the migration summary counters in the transaction log, and type `quit` to end the MS-DOS session, before running the migration utility again.

Review the migration summary and the migration transaction log as follows:

IF you want to review the	THEN
migration summary	<p>type <code>summary</code> at the <code>Cl></code> prompt and then press Enter.</p> <p>The migration summary appears on the screen.</p>
migration transaction log	<ul style="list-style-type: none"> • double-click the MigTransaction<yymmddhhmmss>.log file in the migration folder. <p>or</p> <ul style="list-style-type: none"> • open the MigTransaction<yymmddhhmmss>.log file using a text editor, such as Notepad.

**IF you want to
review the** **THEN**

Example of data migration summary

The following example (edited for length) shows the summary of a system data migration.

```
** Wednesday, November 28, 2001 [11:48:51 AM]
**Transferring the tape files to Windows NT
format. Please wait ...
    UserTapeLabel: MM Tech Trial Data Oct.24
    SystemTapeLabel: Date=10/24/2001 Time=19:22:25
Premigration system check ...
Starting data migration of System Profile data
group ...
The messaging parameters are updated successfully.
The parameters for SECURITYPROF are updated
successfully. Updating RPL information [79]
Migrating the Site and Location information: Site
[ 0] Location [ 1]
Migrating the Site and Location information: Site
[ 1] Location [ 1]
Migrating the Site and Location information: Site
[ 2] Location [ 1]
Migrating the Site and Location information: Site
[ 3] Location [ 1]
Migrating the Site and Location information: Site
[ 4] Location [ 1]
.
.
.
ServerConnection migration : [31]
The parameters for DIALINGTRANDFLT are updated successfully.
The parameters for NETWDELIVPROFILE are updated successfully.
The parameters for NETWDELIVPROFILE are updated successfully.
The parameters for OUTCALLING are updated successfully.
COS data migration : COS #[11]
User data migration : User #[700]
SDL data migration : SDL #[36]
User PDL data migration: User # [700]
Menu, Announcement and Fax data segment migration: The
service ID file name
[_F1\cust\cust1\nm_abd\nm_mig\MS14020]
The service ID file name
[_F1\cust\cust1\nm_abd\nm_mig\MS1760001]
The service ID file name
[_F1\cust\cust1\nm_abd\nm_mig\AS1540401]
The service ID file name
```

```

[_F1\cust\cust1\nm_abd\nm_mig\AS1540402]
.
.
.
** Monday, February 18, 2002 [05:12:21 PM] **
*****| Summary of Data Migration
|*****
System and Customer Profile Data Migration:
-----
System Record: <Update not required>
Customer Record: <Update not required>
Tenant Record: <Update not required>
Messaging Parameters: <Updated Successfully>
Security Parameters: <Update not required>
-----Restric
tion and Permissions Lists:
-----
Total Number of RPLs attempted: <80>
Total Number of RPLs created/updated successfully:
<0>
Total Number of RPLs skipped: <80>
Total Number of RPLs in Error: <0>
-----Network
Database:
-----
Total Number of Servers attempted: <32>
Total Number of Servers created/updated
successfully: <31>
Total Number of Server updates skipped: <1>
Total Number of Server updates in Error: <0>
Total Number of Locations attempted: <33>
Total Number of Locations created/updated
successfully: <31>
Total Number of Location updates skipped: <2>
Total Number of Location updates in Error: <1>
Total Server Connection Lists attempted: <31>
Total Server Connection Lists created/updated
successfully: <31>
Total Server Connection List updates in Error: <0> Customers
General Delivery Parameters: <Update not required>
Customers AMIS Delivery Parameters: <Update not required>
Customers Enterprise Networking Parameters: <Update not
required>
Customers Fax Delivery Parameters: <Update not required>
Customers DTT Delivery Parameters: <Update not required>
Customers DTT/DTF Prefixes: <Update not required> Customers
Default Dialing Parameters: <Update not required>
-----Class of
Services:
-----

```

```

Total Number of COSs attempted: <12>
Total Number of COSs skipped: <12>
Total Number of COSs in Error: <0>
-----User
Profile:
-----
Total Number of Local Users attempted: <168>
Total Number of Local Users created/updated
successfully: <64>
Total Number of Local Users skipped: <104>
Total Number of Local Users in Error: <60>
Total Number of Spoken name verifications data
attempted: <322>
Total Number of Spoken name verifications data
created/updated successfully: <322>
Total Number of Spoken name verifications data in Error: <0>
Total Number of User Greetings data attempted: <81> Total
Number of User Greetings data created/updated successfully:
<81>
Total Number of User Greetings data in Error: <0> Total
Number of Remote Users attempted: <483>
Total Number of Remote Users created/updated
successfully: <482>
Total Number of Remote Users in Error: <1>
Total Number of Directory Entry Users attempted:
<50>
Total Number of Directory Entry Users created/
updated successfully: <48>
Total Number of Directory Entry Users in Error: <2>
-----System
Distribution Lists:
-----
Total Number of SDLs attempted: <37>
Total Number of SDLs created/updated successfully: <29>
Total Number of SDLs skipped: <8>
Total Number of SDLs in Error: <0>
-----Personal
Distribution Lists:
-----
Total Number of User PDL updates attempted: <97>
Total Number of PDLs created/updated successfully: <89>
Total Number of PDLs skipped: <8>
Total Number of PDLs in Error: <0>
-----Menu,
Announcements, Fax Items:
-----
Total Number of Services attempted: <109>
Total Number of Services created/updated
successfully: <109>
Total Number of Services in Error: <0>

```

```

-----Other
Errors encountered during the migration:
<4>
*****| End of Summary
|*****
Please check the log file (MigTransaction.log) for details.
CI>

```

Example of a message and Contact Center prompt migration summary

The following example (edited for length) shows the summary of a migration of messages and Contact Center prompts.

```

Cleaning up the MigrationFiles directory ...
Total of [232] files deleted from the staging directory
[D:\Nortel\MPCX\Migration\MigrationFiles]
  UserTapeLabel: SCCS
  SystemTapeLabel: Date=11/20/2001 Time=13:42:47
Start user #[1]
Migrating the voice messages for user [ q]
mbox#[8051]
Start user #[2]
Migrating the voice messages for user [ q]
mbox#[8052]
.
.
No more user messages to migrate.
** Wednesday, November 28, 2001 [11:37:13 AM] **
*****| Summary of Message Migration|*****
User Voice Messages:
-----
Total Number of Messages attempted: <3>
Total Number of Messages created successfully: <3> Total
Number of Messages in Error: <0>
-----
Message Attachments:
-----
Total Number of Attachments attempted: <0>
Total Number of Attachments created successfully: <0>
Total Number of Attachments in Error: <0>
-----
Other Errors encountered during message migration: <1>
*****| End of Summary |*****
Please check the log file (MigTransaction.log) for details.

```

Reviewing the CallPilot event log

Nortel recommends that you review the CallPilot event log for errors after a migration. You can view the event log by using one of the following methods:

- In CallPilot Manager: click System > Event Browser.
For more information, refer to the CallPilot Manager online Help.

- In Windows Server 2003: click Start > Programs > Administrative Tools, and then double-click Event Viewer. Review the System and Application Logs.

Ignore MTA events 54101 and 54103, as well as event 55500 (Mutex and semaphores).

If an error occurs during the migration, an error message indicating the nature of the error is recorded in the log file. For a list of error messages, see [Chapter 7 "Troubleshooting" \(page 107\)](#).

Rerunning the migration

If you must rerun the migration, or if certain information already exists on CallPilot because it was configured before the migration, you must be aware of the data that is overwritten or not during the migration.

What is overwritten on CallPilot

The migration utility overwrites the existing CallPilot system data, voice segments, and users with the collected Meridian Mail data.

What is not overwritten on CallPilot

If the migration utility finds duplicate users during the migration, you are informed and prompted to delete or skip them. If you choose to delete the users, they are removed from CallPilot and then added from the migration tape. If you choose to skip the users, the migration continues without updating the users on the CallPilot system.

If a COS or RPL on the CallPilot system has the same name, the migration utility does not overwrite it with the collected Meridian Mail data. The following events occur when the migration utility finds duplicate names during the migration to CallPilot:

- The Meridian Mail RPL is not migrated. The CallPilot RPL remains in effect.
- The Meridian Mail COS is renamed to `<COS name>_MMail<COS ID>` and then migrated to CallPilot. As a result, migrated users can be assigned to the wrong mailbox class.

If you are migrating users to CallPilot in multiple sessions, then rename all existing CallPilot mailbox classes before you begin each migration session to CallPilot.

Voice messages are always created in the mailbox, even if the same messages were previously migrated to the mailbox. If you perform the message migration using the same message tape again, messages are

duplicated in the mailbox. For example, if a user has two messages in the mailbox and the same tape is used to rerun the migration, the user then has four messages in the mailbox.

If a network site or switch location is already defined on CallPilot with the same name as in Meridian Mail, the migration utility does not overwrite it with Meridian Mail data. This ensures that any changes that you make to the network database on CallPilot after the first migration attempt are not lost.

Conversion issues

CallPilot does not support the DN expansion. This issue can affect mailbox numbering patterns on SL-100* systems.

The messages stored in the user mailbox on the Meridian Mail system, and not sent before the migration, are not addressed correctly to recipients. To send these messages, users must forward them.

Using Application Builder to complete the migration of voice services

This section provides information on using Application Builder to complete the migration of voice services. The person who performs this task must have a good knowledge of Application Builder and of the migrated Meridian Mail voice services.

VSDN table information

ATTENTION

Print the Meridian Mail VSDN table information in advance to facilitate the recreation and rebuilding tasks in CallPilot Application Builder.

The information in the Meridian Mail VSDN table and the Meridian Mail voice menu structure are critical. Because this information cannot be migrated automatically, you must use CallPilot Application Builder to:

- recreate or rebuild the menu or announcement structure extracted from the Meridian Mail VSDN table.
- manage, save and complete the applications and control blocks.
- publish the applications in the CallPilot Service Directory Number (SDN) table.

Migrated voice services

You can migrate the following Meridian Mail voice services to CallPilot:

- menus
- announcements

- fax items

Each voice service (for example, a menu) migrated from Meridian Mail is represented as an Application Builder application on CallPilot. This application contains voice or fax items, or both, that are associated with the migrated voice service on Meridian Mail.

The logic of the voice services is not migrated to CallPilot. Only a default application is created in Application Builder. You must complete the application manually so that you can put it into service in CallPilot.

Identifying migrated voice items

Items migrated to CallPilot are identified by the type and ID of the migrated voice services.

Prompts

A migrated prompt has a prefix of file11, followed by underscore and the mailbox number from Contact Center. For example, a prompt from mailbox 8053 appears as file11_8053 in Application Builder. The description of the application is as follows: "Migrated SCCS Prompts from mbx 8053."

Fax services

A migrated fax service has the prefix FS1, followed by the service ID from the Meridian Mail VSDN table. For example, a fax service with an ID of 30000 appears as FS130000 in Application Builder. The description of the application is as follows: "Migrated from Fax Service FS130000."

Menus

A migrated menu has a prefix of MS1, followed by the service ID from the Meridian Mail VSDN table. For example, a Voice Services menu with an ID of 1035 appears as MS11035 in Application Builder. The description of the application is as follows: "Migrated from Menu Service MS11035."

Announcements

A migrated announcement has the prefix AS1, followed by the service ID from the Meridian Mail VSDN table. For example, a Voice Services announcement with an ID of 1004 appears as AS11004 in Application Builder. The description of the application is as follows: "Migrated from Announcement Service 11004."

To complete migrated voice services in Application Builder


The following procedure explains how to complete the migration of Meridian Mail voice services in Application Builder so that you can use them as CallPilot applications. You must have a good knowledge of Application

Builder, and of the migrated Meridian Mail voice services, to complete the procedure. Refer to the administrator of the Meridian Mail system for information on the structure of the migrated voice services.

Step	Action
------	--------

- 1 Open Application Builder and connect to the CallPilot server.
- 2 Click **File > Open**.

Result: The list of migrated voice services is displayed in the Open dialog box.

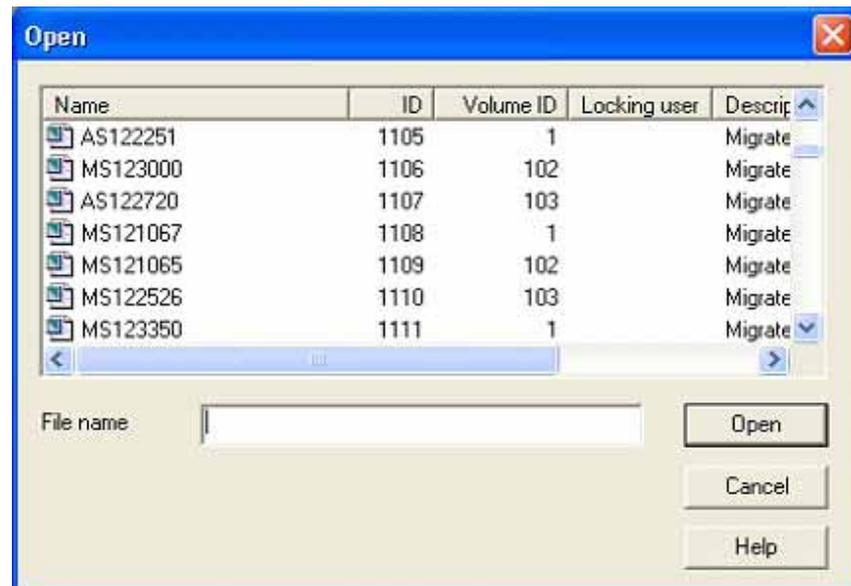


- 3 Click a migrated voice service and then click **Open**.

For illustration purposes, a menu (MS123000) is selected. The service ID of this menu is 23000 in the Meridian Mail VSDN table. Based on your knowledge of the Meridian Mail system, determine the VSDN IDs of the services that this application includes. For this example, the MS123000 menu contains the following services:


Application	File name	Meridian Mail VSDN ID
submenu	MS123100	23100
fax service	FS130000	30000
announcement (2)	AS123004	23004
	AS123005	23005

Result: The selected voice service opens as a default application in Application Builder. The application is empty (such as a new application), and contains a Begin block at the left and other blocks (such as Rotary, Transfer, Goodbye, and End) at the bottom of the window.

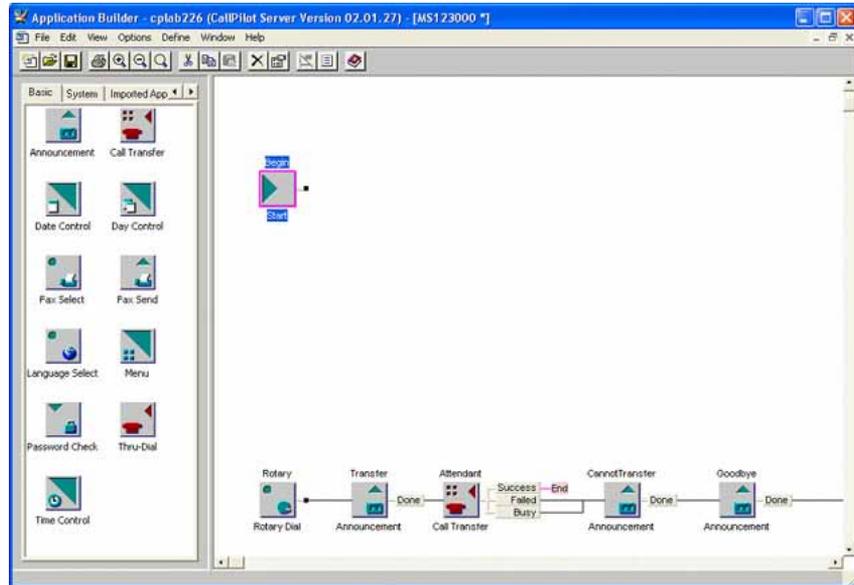


- 4 Select a menu block in the Application Builder palette and drag the block to the application panel.

Tip: The block must match the type of voice service that you open (in this example, a menu).

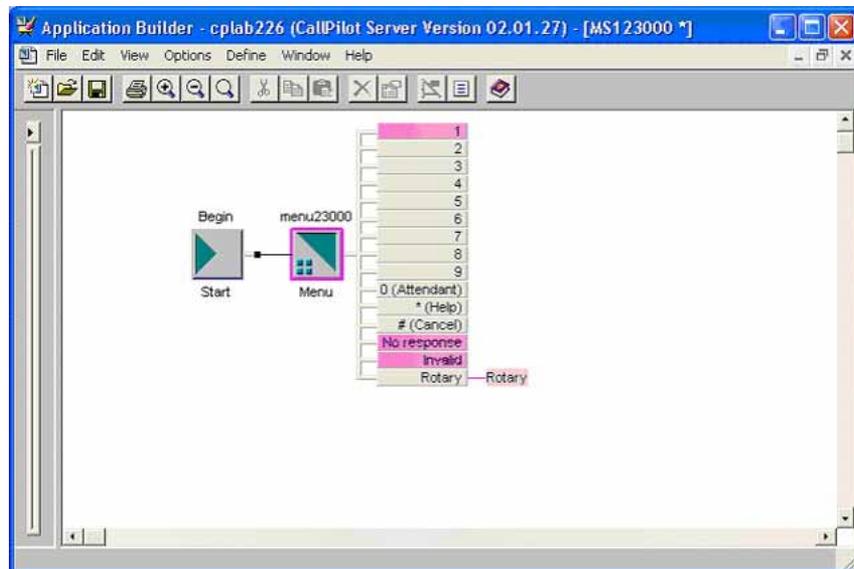

- 5 Right-click the menu block and then click **Properties** on the shortcut menu.

Result: The block dialog box opens. The following illustration shows the properties of a menu block.

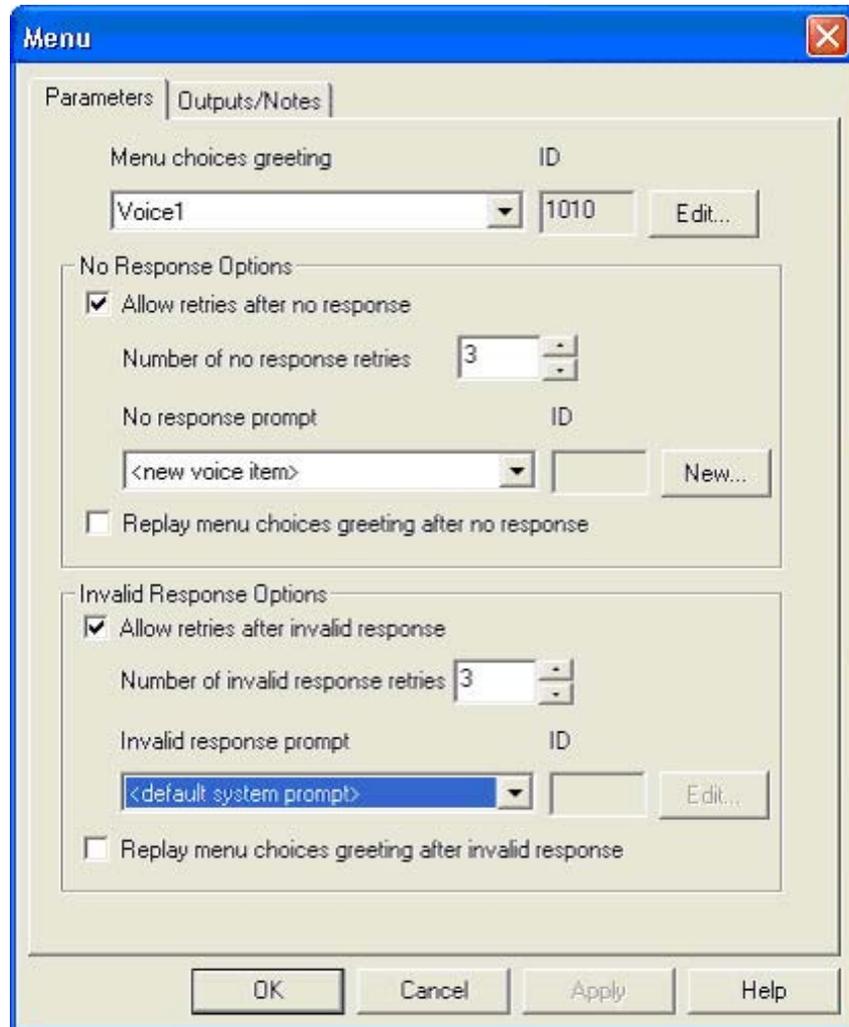

- 6 Configure the block according to the requirements of your application, as the voice service was configured in Meridian Mail.
- 7 Click **OK** to close the Properties dialog box.
- 8 Perform the following tasks for each service that must be included in the main menu application (for example, for the submenu, the fax item and the announcements):
 - a. Click **File > Open**, select a migrated service and open it.

- b. In the Application Builder palette, select a block that corresponds to the type of migrated service, and drag the block to the application that you opened in the preceding step.
- c. Right-click the block, click **Properties** on the shortcut menu, and configure the block.
- d. Click **File > Save**.
- e. Click **File > Export**.

Note: The component application block must be exported so that the main application can use it.

Tip: The submenus (such as the MS123100 menu) can include options and announcements. You must configure the submenus before saving and exporting them. If your specific main application includes submenus, use this procedure to complete them.

- 9 Switch to the main application in Application Builder.

Tip: This is the application that you opened in step 3 (the MS123000 menu in this example).

- 10 Click **File > Import**.


Result: A dialog box opens, listing all the applications that can be imported. These are the applications that you configured, saved and exported in step 8.

- 11 Select the applications that you want to import (for example, MS123100, FS130000, AS123004 and AS123005), and click OK.

- 12 Click the **Imported Applications** tab in the Application Builder left panel.

- 13 Drag the imported application blocks to the main application panel.

- 14 Connect the menu keys to the imported application according to your configuration requirements and to the structure of the service migrated from Meridian Mail; for example, connect key 1 to the MS123100 block.

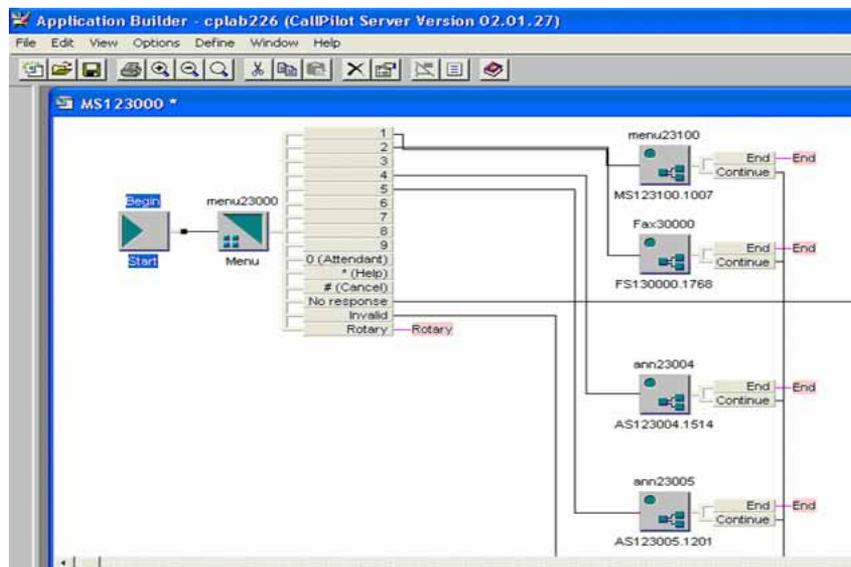

15 Save the completed application.

—End—

To publish the application in the CallPilot SDN table

Step Action

- 1 Open CallPilot **Manager**.
- 2 Click **System > Service Directory Number**.


Result: The following page appears on the screen.

#	Service DN	App Name	Media Type	Min Channels	Max Channels	Comments
1	3669	Voice Form Transcription Service	Voice	0	Default Max.	
2	3690	Voice Form Application	Voice	0	Default Max.	Application Form A
3	4300	Voice Messaging	Voice	0	Default Max.	
4	OUTBOUND10	AMIS Networking	Voice	0	Default Max.	
5	OUTBOUND11	Remote Notification	Voice	0	Default Max.	
6	OUTBOUND15	Multi-delivery to Fax	Fax	0	Default Max.	
7	OUTBOUND18	Desktop Telephony Agent	Voice	0	Default Max.	
8	OUTBOUND23	SCCS VPE	Voice	0	Default Max.	
9	OUTBOUND25	Conferencing Outcalling	Voice	0	Default Max.	
10	OUTBOUND55	Enterprise Diagnostics	Voice	0	Default Max.	
11	OUTBOUND6	Admin Agent	Voice	0	Default Max.	

- 3 Click the Service DN of the application that you want to put into service.

Tip: In this example, click the 3669 Service DN, which corresponds to the One Number Voice Fax Call Answering.

Result: The following page appears on the screen.

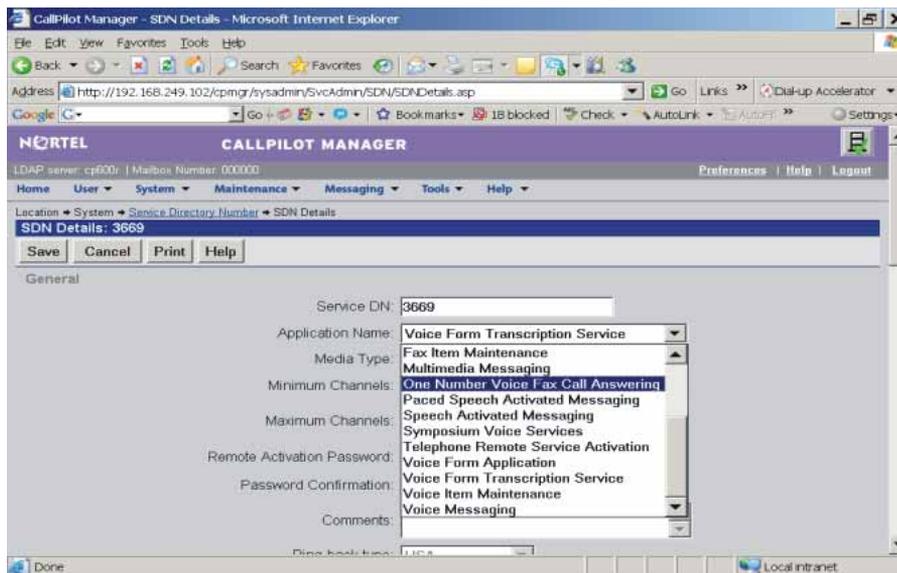

- 4 Select the name of the application that you want to put into service from the Application Name drop-down list box.

- 5 Click Save.

Result: The migrated Meridian Mail application can now be used in CallPilot.

- 6 Test the application before use, and ensure that each key is associated with the correct menu option.

Note: When calling the application SDN, the correct menu must play.

—End—

Moving Application Builder data

The Application Builder Move Application utility enables you to move an Application Builder application from one volume to another.

When the application is moved, new files in NTFS and MMFS formats, as well as a new database entry for the new application, are created on the new volume.

Format of migrated voice items

Announcements and prompts are considered to be different in Meridian Mail voice services. You can use announcements in multiple services, but you can use a voice prompt only in one service. However, both announcements and voice prompts are classified as voice items in Application Builder.

On the CallPilot server, you can access the migrated announcements and the voice prompts of menus in the same way you access voice items.

Voice items are compatible with all applications. For example, you can use the same voice item in multiple applications just as you used an announcement in multiple services. As a result, you can use the existing voice prompts in multiple applications.

Chapter 6

Performing post-migration tasks

In this section

"Disconnecting the tape drive" (page 85)

"Verifying CallPilot system configuration" (page 85)

"Verifying CallPilot network database" (page 88)

"Replacing Meridian Mail with CallPilot" (page 93)

"Running Meridian Mail and CallPilot at the same time" (page 94)

Disconnecting the tape drive

If you used an external tape drive to perform the migration, you must disconnect the tape drive at the end of the migration process. Do not disconnect the tape drive until you are certain that the migration is successful.

<p style="text-align: center;">ATTENTION</p>

<p>If the server has an internal tape drive, do not remove it.</p>
--

To disconnect the tape drive

Power down the CallPilot server, and then unplug and disconnect the tape drive.

Verifying CallPilot system configuration

Introduction

During the migration to CallPilot, some fields are converted to default values, because the information cannot be migrated from Meridian Mail to CallPilot, or the information did not exist in Meridian Mail. Refer to "[Data that can or cannot be migrated](#)" (page 20).

After the migration to CallPilot, you must review the CallPilot configuration and, if necessary, revise it. This section identifies the areas that you must review after the migration is completed.

Use CallPilot Manager to review the system configuration.

Migration transaction log

To determine the information that must be verified or changed after the migration is completed, review the migration transaction log file.

Review the migration summary first. Then, if necessary, review the details in the migration log.

You can use the following keywords to search for information in the migration transaction log:

- ClassofService (for COS)
- error
- netw (for network sites and locations)
- PDL (for personal distribution list)
- restriction or permission (for RPLs)
- shared (for SDLs)
- user
- warning

Verifying mailboxes and mailbox owners

CallPilot mailboxes must be three or more digits in length. If a Meridian Mail user's mailbox number is less than three digits in length, the mailbox is not migrated. Warning messages are generated in the transaction log file and displayed on screen.

Invalid addresses in a Meridian Mail user's PDL are not migrated. Invalid addresses are reported as skipped in the transaction log file. Some of the user mailboxes associated with the address do not yet exist on CallPilot, but they are migrated later in the process. You and the CallPilot system administrator are responsible for determining whether reported invalid addresses are in fact invalid.

If the PDLs contain many invalid addresses, collect the PDL data again from Meridian Mail and then migrate the PDL data to CallPilot.

To reduce the number of invalid addresses in PDLs when mailboxes are migrated in more than one session, Nortel recommends that you migrate PDLs last, after all mailboxes are migrated.

The remote notification and fax capability for all users are disabled by default.

Mailboxes are created uniformly on all volumes based on the available free space on each volume.

Verifying restriction/permission lists and mailbox classes

The following considerations apply to the verification of the restriction/permission lists (RPLs) migrated to CallPilot.

- All 80 RPLs are migrated to CallPilot.
- Some RPLs do not contain relevant codes.
- The RPL entries used by mailbox class entries cannot be deleted (in the case where a migration is rerun) due to a database integrity check. These RPLs are retained.
- If you migrate RPLs and COSs in multiple sessions and rename the RPLs and mailbox classes that already exist on CallPilot, review the RPLs and mailbox classes and make the appropriate changes.
- In case of errors, not all data can be migrated during the first migration attempt. After the problem is resolved, rerun the migration utility with the same Meridian Mail data to migrate the incomplete data components.
- If a data migration is not completed because of an error, then resolve the error before rerunning the migration.

Verifying system distribution lists

The Meridian Mail system distribution lists are known in CallPilot as shared distribution lists (SDL).

A Meridian Mail system distribution list, whose number is less than three digits in length, is not migrated to CallPilot.

Invalid DNs in an SDL are removed before migration. The transaction log file lists all the invalid entries.

CallPilot and Contact Center integration

If you use CallPilot to provide messaging services in a Contact Center environment, run the CallPilot Configuration Wizard, and ensure that the following items are configured:

- Contact Center ELAN address (on the Switch Information page)
- voice ports dedicated to ACCESS or IVR services (on the Channel Detail Information page)
- ACCESS and IVR DNs (on the ACD queues Information page)

For more information on the CallPilot and Contact Center integration, refer to:

- the configuration and testing guide for your switch (see "[Reference documents](#)" (page 18))
- Configuration Wizard online Help

Configuring items that are not migrated

You must also configure the following items that cannot be migrated from Meridian Mail to CallPilot:

- Hacker Monitor and Alarm Monitor settings
- backup schedules
- Service Directory Numbers (if they are not already configured in CallPilot Configuration Wizard)
- Remote Notification schedules
- CallPilot server area and exchange codes, as well as translation tables

Verifying CallPilot network database

Introduction

After migration, the CallPilot system administrator must:

- review the network database.
- add any missing information.
- enable the networking service for each remote site.

Ensure that the network data from Meridian Mail is collected and migrated only once. If the migration is rerun, the migration utility does not update the network database again. This ensures that any changes you make after the first migration attempt are not lost.

If you intend to run both Meridian Mail and CallPilot at the same time, then review "[Running Meridian Mail and CallPilot at the same time](#)" (page 94) before verifying the network database configuration.

Data that is not migrated

If the CallPilot system is not keycoded for networking, then the Meridian Mail remote site information is not entirely migrated. In this case, an appropriate warning appears while the migration is in progress. You are also notified of potential mappings on the system in the migration transaction log.

The network scheduling parameters (such as stale time) are not migrated from Meridian Mail. The default CallPilot values are used instead. When the migration is complete, you must reenter these values to match the Meridian Mail values; otherwise, network scheduling does not function.

Making configuration changes in CallPilot

When making configuration changes to a site or location in the network database, all required fields must be completed before the changes can be saved. Since message transmission is disabled for all sites after performing the migration, you must configure each screen individually.

Local server and prime location

The local server and prime location entries are defined by default on the CallPilot system. The migration utility updates these entries with data that is specific only to Meridian Mail on the first migration attempt.

You must verify the local server and local prime location configurations to ensure that they are correct.

Networking protocols

Networking protocols are available only if the networking feature is purchased. If the networking feature is purchased on the CallPilot keycode, all networking solutions are enabled automatically.

The following table shows how the networking protocol for each site is redefined during migration if the Meridian Mail protocol does not exist in CallPilot :

Meridian Mail protocol	CallPilot protocol
Meridian	Enterprise
AMIS	AMIS
Enterprise	Enterprise

If the protocol for a site is changed, the information for the protocol can be incorrect, such as:

- the connection DN for the remote site can be incorrect or missing.
- some of the related fields can be set to use default values or can be left blank.

Note: The transaction log files capture the protocol changes.

Network sites

Ensure that all the sites present in the Meridian Mail network database are migrated. If any sites or switch locations are missing, you must add them manually in CallPilot.

If there were any duplicated site names on Meridian Mail, only the site or location associated with the first occurrence of the name is migrated to CallPilot. Subsequent occurrences are not migrated. The same rule applies to switch location names that are duplicated within a particular site.

The server type value for each remote site is always defined as CallPilot, regardless of the type of remote server. Meridian Mail does not have a server type field and, therefore, cannot provide this information for migration.

Switch location dialing plan information

The electronic switched network (ESN) and coordinated dialing plan (CDP) configurations must be validated for all local and remote locations, including both prime and satellite locations.

If more ESN prefixes are required than the number of prefixes that Meridian Mail allows, additional ESN prefixes are configured as CDP steering codes. After the migration, you must manually convert the ESN prefixes configured as CDP steering codes to ESN prefixes; that is, enter the ESN prefixes and delete the CDP steering codes.

In CallPilot, you can configure up to 30 ESN location codes for each switch location.

Remote users

Each site defined in the Meridian Mail network database can be associated with remote user entries in the directory and with remote user entries in PDLs and SDLs. The remote user data for a particular site is not migrated if the site networking protocol is changed during the migration; for example, from Meridian networking to Enterprise networking.

The SDLs and PDLs that contain remote users and addresses for users located at deleted remote sites are still in the list. However, warning messages indicate the invalid addresses.

Summary: CallPilot networking values after migration

The CallPilot administration software enforces the population of certain fields. If the information is not available in Meridian Mail, the field is left blank during the migration. For example, the voice profile for Internet mail (VPIM) networking protocol requires that at least one prefix be defined for local and remote locations where VPIM is used.

Nortel recommends that you verify the items listed in the following table after you completed the migration to CallPilot.

Item	Value after migration to CallPilot
Server type	CallPilot
	Note: Meridian Mail does not have a server type field.
CallPilot server name	Site name from Meridian Mail
Site ID	The Meridian Mail site ID becomes the CallPilot site ID.
Protocol	Enterprise or AMIS
Connections DN1, DN2, and DN3	These fields can be blank if the networking protocol was changed during the migration.
Enterprise networking initiating password	This field can be blank if the networking protocol was changed during the migration.
Enterprise networking responding password	This field can be blank if the networking protocol was changed during the migration.
Message transfer between the local server and each remote site	This option can be disabled if the networking protocol was changed during the migration.
Exchange of remote user information between the local server and each remote site:	These options can be disabled if the networking protocol was changed during the migration.
	<ul style="list-style-type: none"> • Add/Update Remote Users (on the local server) • Send local user information (on each remote site in the network database)

Item	Value after migration to CallPilot
<p>Exchange of text data between the local server and each remote site:</p> <ul style="list-style-type: none"> • Receive Message Text Information (on the local server) • Send Message Text Information (on each remote server in the network database) 	<p>These options can be disabled if the networking protocol was changed during the migration.</p>
<p>Exchange of network broadcast messages between the local server and each remote site</p>	<p>This option can be disabled if the networking protocol was changed during the migration.</p>
<p>ESN prefixes (ESN access and location codes) configured in Meridian Mail as CDP steering codes</p>	<p>CDP steering codes</p> <p>After the migration, you must manually convert the ESN prefixes that were configured as CDP steering codes to ESN; that is, enter the ESN prefixes and delete the CDP steering codes.</p>
<p>VPIM network shortcut</p>	<p>None</p> <p>The VPIM network shortcuts are not available in Meridian Mail.</p>
<p>Network scheduling parameters in Message Delivery Configuration:</p> <ul style="list-style-type: none"> • Open AMIS delivery schedules • economy delivery schedules • stale times 	<p>Default</p>

Replacing Meridian Mail with CallPilot

Introduction

Once data is successfully migrated, CallPilot can replace Meridian Mail as the messaging system on the switch. For details on configuring the switch for CallPilot, refer to the section on switch programming in the configuration and testing guide for your switch (see "[Reference documents](#)" (page 18)).

MGate card

To connect the CallPilot system to a Meridian 1* or Communications Server 1000 switch (formerly known as CS 1000), you must replace the MGate card in the switch with an NTRB18CA MGate card.

Removing VMBA from the X11 database on the switch

If you perform a complete changeover from Meridian Mail to CallPilot, any voice mailbox administrator (VMBA) data becomes meaningless, because the Meridian 1 switch no longer has a link with the voice mail service. You can leave the VMBA data unchanged or remove it.

Some customers prefer to perform a phased cut-over to CallPilot. In this case, a single Meridian 1 switch supports both Meridian Mail and CallPilot for a specified time. Nortel recommends that these customers delete the VMBA data in the X11 database for telephone sets of users who migrate to CallPilot.

Using MAT when upgrading from Meridian Mail

If Meridian Mail is still present on the Meridian 1 switch, and VMBA data is programmed in the Meridian Administration Tools (MAT) for a set that is to be migrated to CallPilot, delete the VMBA information through MAT on a per set basis. Since the VMBA data cannot be modified globally, this task must be done one set at a time. If the VMBA data is completely removed by using the MAT, and the set changes are synchronized with the Meridian 1 database, the VMBA data for the deleted sets is removed in the X11 database.

If CallPilot is installed and Meridian Mail is removed entirely, the VMBA data is meaningless in both the X11 database and the MAT. The VMBA data can be removed or remain in the databases at the discretion of the system administrator. In either case, the data has no meaning without a Meridian Mail system, due to the absence of a link for creating or deleting Meridian Mail voice mailboxes.

CallPilot and Contact Center integration

If you integrate CallPilot and Contact Center, ensure that you configure the Contact Center accordingly before putting both systems into operation.

Running Meridian Mail and CallPilot at the same time

Introduction


This section provides the configuration guidelines for running Meridian Mail and CallPilot in parallel, with both systems connected to the same switch. If you want to run both systems in parallel, Nortel recommends that you review and understand this section, before making changes to the messaging network configuration.

ATTENTION

You must have a good understanding of the CallPilot networking solutions and configurations.

Sample network setup

If you plan to migrate all your Meridian Mail users to CallPilot, ensure first that CallPilot works as expected and implement the CallPilot system with a limited number of users. The CallPilot system is set up to reside together with the Meridian Mail system, as illustrated below.

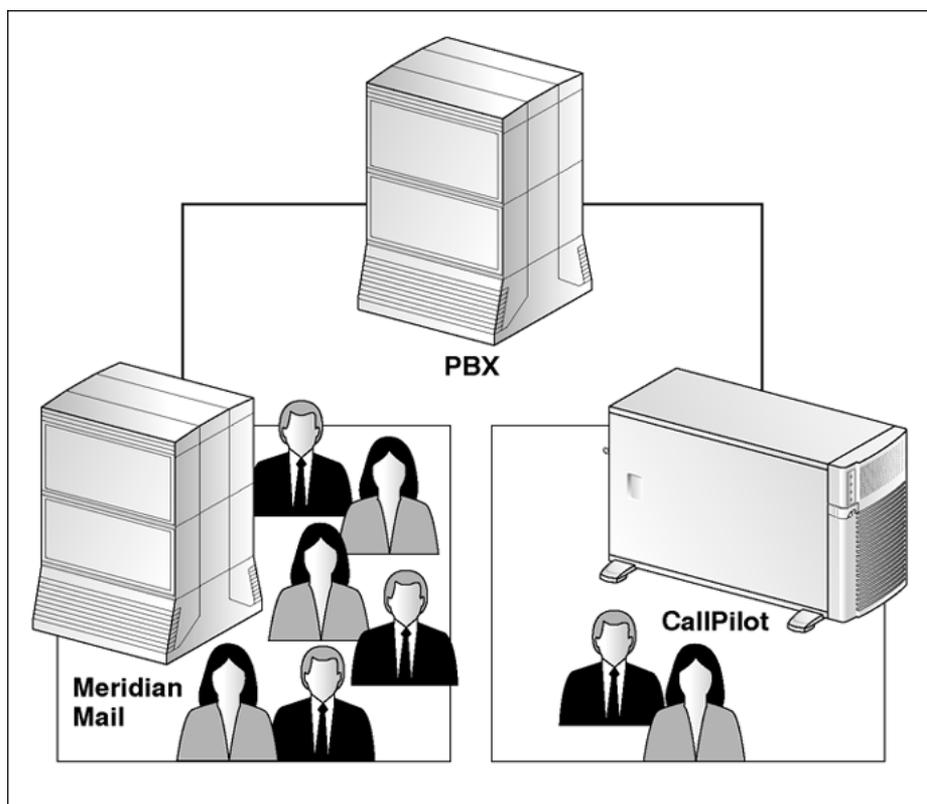

G101679

You can choose to operate CallPilot and Meridian Mail in parallel on the same switch for an indefinite period.

Assumptions

The following assumptions apply to the guidelines provided in this section:

- CallPilot is added to a Meridian 1 switch that is already connected to Meridian Mail.
- The mailboxes are migrated from Meridian Mail to CallPilot in stages. Initially, only a small percentage of users are on CallPilot.

Note: Users at remote sites are addressing messages to both systems.

- Because most users initially remain on Meridian Mail, Meridian Mail retains the private numbering plan for addressing messages.

Site configuration

You must allow users on the Meridian Mail and CallPilot systems to address messages to each other. Therefore, you must define each system as a remote site in the other system network database so that:

- the Meridian Mail system is a remote site in the CallPilot network database.
- the CallPilot system is a remote site in the Meridian Mail network database.

Define both systems as remote sites in the network database at each site in the messaging network, only if the following conditions apply:

- The migration of users from Meridian Mail to CallPilot is completed over an extended period of time.
- Users at remote sites must address messages to users on each system during the migration period.

Both systems must have unique site IDs. Configure the networking protocol, dialing plans, and users as described in this section.

Networking protocols

You can use either Enterprise networking or VPIM networking between the Meridian Mail and CallPilot systems. If VPIM networking is used, then the Meridian Mail Net Gateway (MMNG) must be connected to the Meridian Mail system and act as the front end to the Meridian Mail system.

Nortel recommends that you use Enterprise networking between the two systems. Enterprise networking is the easiest protocol to set up and provides more ports to handle networking traffic than the MMNG.


Dialing plans

To accommodate both Meridian Mail and CallPilot systems, as well as to minimize the switch configuration effort, Nortel recommends that you use one of the following options:

- "Option 1: To change the current dialing plan to use digit overlap" (page 96).
- "Option 2: To use the existing dialing plan on one system and create a none dialing plan on the oth" (page 99).

Option 1: To change the current dialing plan to use digit overlap

The following diagram shows an example of this configuration. The diagram assumes that the Enterprise networking protocol is used between all systems.

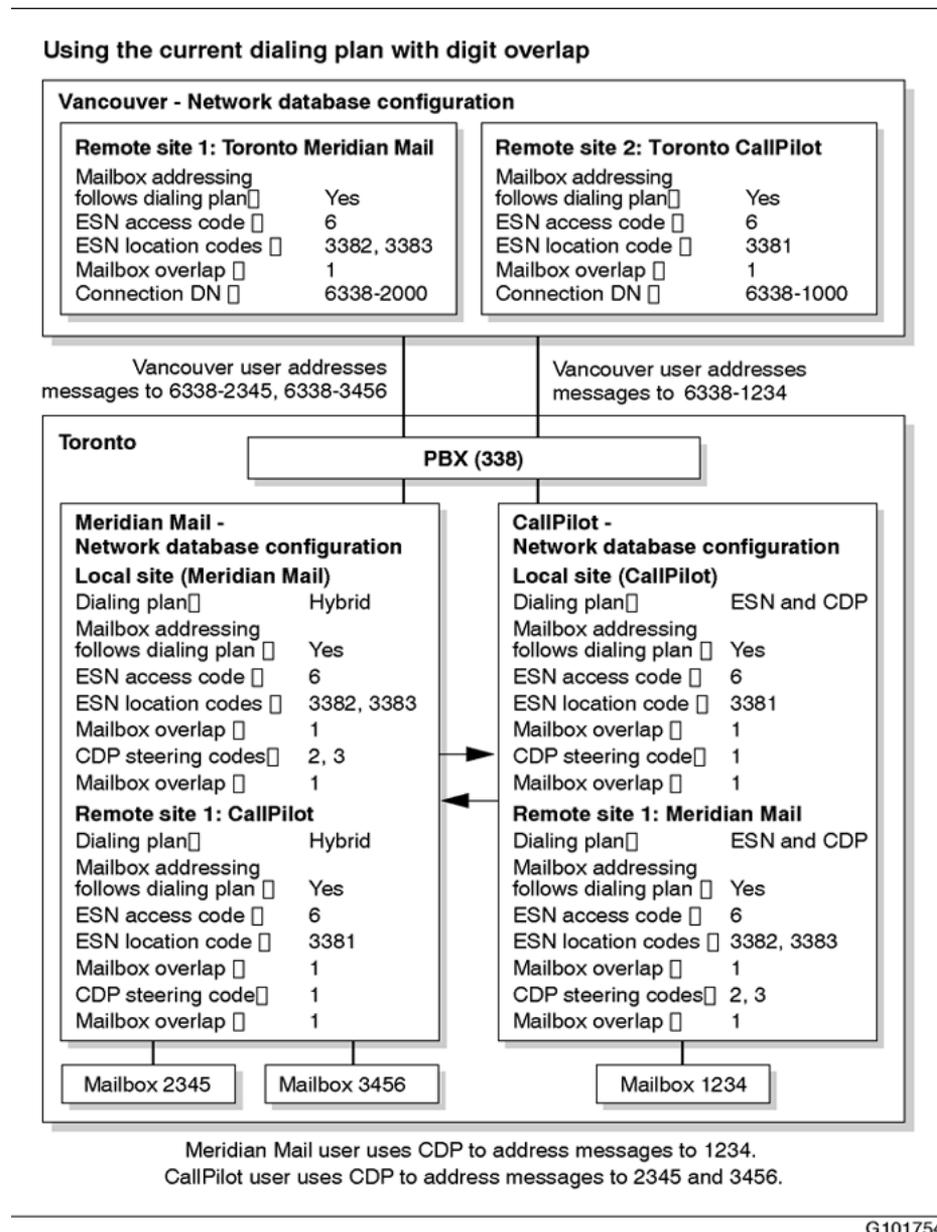

Execute the following procedure to change the current dialing plan to use digit overlap:

Step	Action
------	--------

- | | |
|---|---|
| 1 | Modify the existing dialing plan for the local site configuration in the Meridian Mail network database as follows: |
|---|---|

- a. Create a new ESN prefix (ESN access code and ESN location code) and a new CDP steering code to correspond to each range of extension numbers that are left on Meridian Mail.
- b. Specify a one-digit overlap for each code.
- c. Delete the original ESN prefix and CDP steering code.

Example: If the ESN location code is 338 and mailboxes 1000–3999 exist on Meridian Mail, create new ESN location codes with a one-digit overlap on Meridian Mail for **3381**, **3382**, and **3383**. Create CDP steering codes with a one-digit overlap for **1**, **2** and **3**. The bold digits represent the 1-digit overlap with the mailbox numbers.

- 2 Migrate users from Meridian Mail to CallPilot on the basis of the user extensions.

Example: Collect and migrate users with extensions 1000–1999.

- 3 Delete the migrated mailboxes from Meridian Mail.

Note: Retain the migrated mailboxes on Meridian Mail only if you want users to receive and send messages from both Meridian Mail and CallPilot mailboxes.

- 4 Create an ESN prefix (ESN access code and ESN location code) and a CDP steering code for the local site configuration in the CallPilot network database to correspond with each range of extension numbers that you migrated from Meridian Mail. Specify a one-digit overlap for each code.

Example: If you migrate extensions 1000–1999 to CallPilot, create an ESN location code with a one-digit overlap on CallPilot for **3381**. Create a CDP steering code with a one-digit overlap for **1**. The bold digits represent the 1-digit overlap with mailbox numbers.

- 5 Delete the ESN prefixes and CDP steering codes that you create on CallPilot (for example, **3381** and **1**) from the local site configuration in the Meridian Mail network database.

- 6 Add the CallPilot system as a remote site to the Meridian Mail network database.

Note: Specify the dialing plan as configured on the CallPilot system (see the configuration diagram on "[Dialing plans](#)" (page 97) and step 4).

Tip: If the CallPilot site is an NMS site, define the satellite locations in a similar manner.

- 7 Add the Meridian Mail system as a remote site to the CallPilot network database.

Note: Specify the dialing plan as configured on the CallPilot system (see the configuration diagram on "Dialing plans" (page 97) and step 4).


Tip: If the CallPilot site is an NMS site, define the satellite locations in a similar manner.

- 8 Ensure that the Meridian Mail and CallPilot systems are defined as remote sites in the network database at each remote site, if both systems must be addressable by other sites in the messaging network.
 - a. Modify the dialing plan for the Meridian Mail remote site in the network database at each remote site. Configure the ESN prefixes or CDP steering codes to use the overlap as described in this procedure.
 - b. Add the CallPilot system as a new remote site to the network database at each remote site. Specify the dialing plan as described in the previous steps.
- 9 Repeat steps 2–5 until all users are migrated from Meridian Mail to CallPilot.
- 10 Modify the dialing plan information for the Meridian Mail and CallPilot sites in the network database at each remote site.
- 11 Delete the ESN prefixes or CDP steering codes from the Meridian Mail site configuration, and add them to the CallPilot site configuration.

—End—

Option 2: To use the existing dialing plan on one system and create a none- dialing plan on the other system

The following diagram shows an example of this configuration. The diagram assumes that the Enterprise networking protocol is used between all systems.

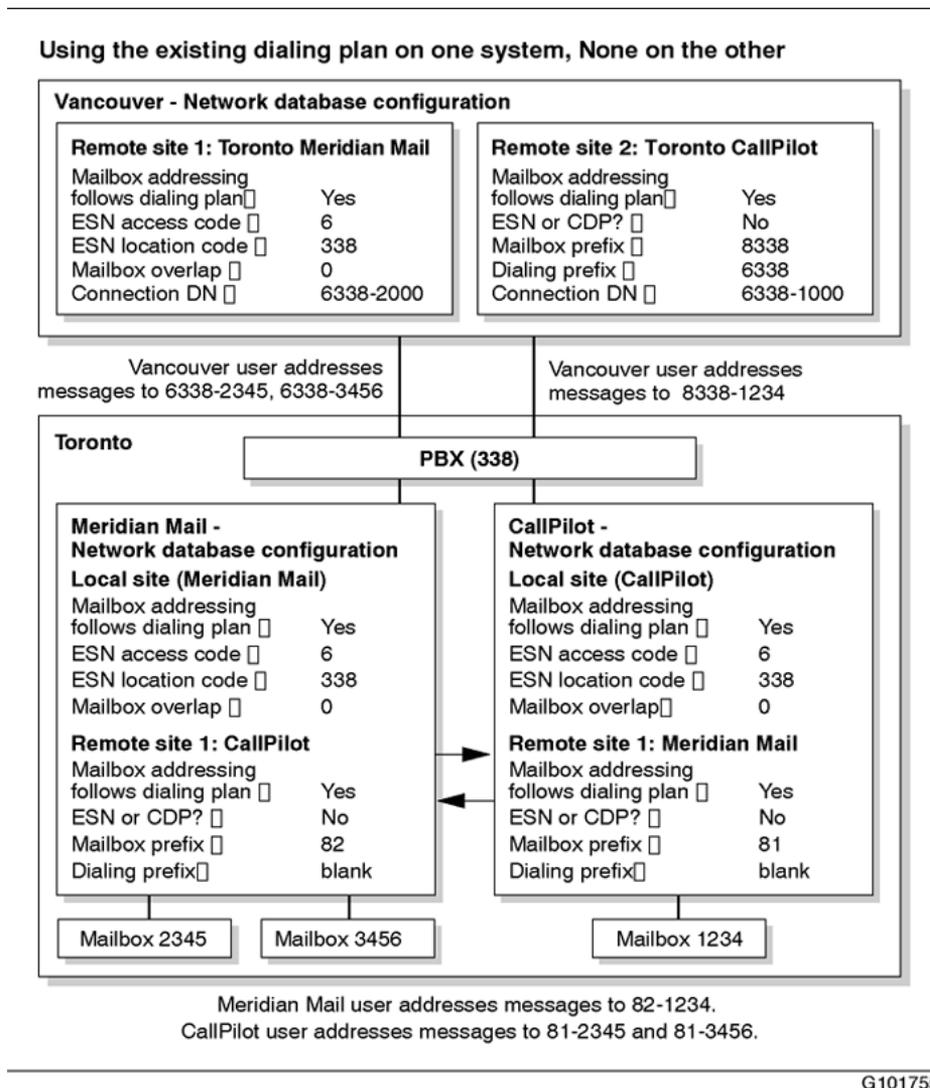

The dialing plan specified for each remote site is based on the number of users residing on the Meridian Mail and CallPilot systems. For example, if most of the mailbox owners reside on the Meridian Mail system, configure the Meridian Mail remote site to use the existing dialing plan and the CallPilot remote site to use the "none" dialing plan (as shown in the diagram on ["Option 2: To use the existing dialing plan on one system and create a none dialing plan on the oth" \(page 99\)](#)). When you migrate the rest of the users to CallPilot, revise the dialing plan information accordingly.

Execute the following procedure to configure the Meridian Mail and the CallPilot systems for option 2, using the existing dialing plan on one system, and creating a "none" dialing plan on the other system.

Step	Action
1	<p>Configure the local site using the current dialing plan in the CallPilot network database.</p> <p>Note: Specify that the mailbox addressing follows the dialing plan.</p>
2	<p>Configure the Meridian Mail system as a remote site using a "none" dialing plan (that is, do not configure the ESN prefix or the CDP code).</p> <p>a. Assign a unique mailbox prefix to Meridian Mail (for example, 81).</p> <p>This mailbox prefix is not visible to the rest of the network and is used to facilitate addressing between the Meridian Mail and CallPilot systems.</p> <p>b. Leave the dialing prefix field blank.</p> <p>If the Meridian Mail site is an NMS site, define satellite locations in a similar manner. Assign a unique mailbox prefix to each location.</p>
3	<p>Configure the CallPilot system as a remote site using a "none" dialing plan in the Meridian Mail network database; that is, do not configure the ESN prefix or the CDP code.</p> <p>a. Assign a unique mailbox prefix to CallPilot; for example, 82.</p> <p>This mailbox prefix is not visible to the rest of the network. It is used to facilitate addressing between the Meridian Mail and CallPilot systems.</p> <p>b. Leave the dialing prefix blank.</p> <p>If the Meridian Mail site is an NMS site, satellite locations are defined in a similar manner. Assign a unique mailbox prefix to each location.</p>
4	<p>Ensure that the Meridian Mail and CallPilot systems are defined as remote sites in the network database at each remote site, which communicate with both systems if both systems must be addressable by other sites in the messaging network. Define Meridian Mail and CallPilot systems as follows:</p> <ul style="list-style-type: none">• One remote site uses the existing dialing plan.• The other remote site uses the "none" dialing plan. <p>Note: If you want to change the Meridian Mail dialing plan to "none" now, (for example, from ESN to None), you must change the Meridian Mail remote site configuration in the network</p>

database at each remote site, before you add the CallPilot system as a remote site.

The system using the "none" dialing plan needs a mailbox prefix and a dialing prefix.

- The mailbox prefix distinguishes the CallPilot system from the Meridian Mail system.
- The dialing prefix is required by the Call Sender feature and remote users. Only one dialing prefix can be specified.

If multiple dialing prefixes are required (for example, multiple ESN codes or multiple CDP steering codes with no overlap), specify in the remote site configuration that mailbox addressing does not follow the dialing plan. When mailbox addressing does not follow the dialing plan, you cannot specify a dialing prefix.

- 5 Create remote user entries, as described in "[Remote user entries on remote systems](#)" (page 103) to allow the Call Sender and Reply feature to function properly.

—End—

VPIM network shortcuts

Configure VPIM network shortcuts for each system if MMNG or desktop messaging is used. For instructions on configuring the VPIM network shortcuts, refer to the CallPilot Manager online Help.

Note: On Meridian Mail and MMNG, VPIM network shortcuts are referred to as VPIM prefixes.

Users

Call Answering and message waiting indicator

Users can have mailboxes on CallPilot, Meridian Mail, or both. However, only one system can accept Call Answering messages for each user. Configure the user's telephone set to forward messages in busy or no answer situations to the system designated as the Call Answering system (for example, CallPilot) for that user.

Both systems can activate the message waiting indicator (MWI) on the user's telephone set by specifying the MWI DN in the user's mailbox configuration on each system. However, the users cannot determine on which system the new messages arrived. Nortel recommends that you perform the following if a user has mailboxes on both Meridian Mail and CallPilot:

- Configure the remote notification feature on the user's Meridian Mail mailbox to send a message to the user's CallPilot mailbox, when a

message is received in the Meridian Mail mailbox. Do not specify the MWI DN in the user's mailbox.

- Specify the user's extension number as the MWI DN in the user's mailbox on CallPilot. When a message is received in the CallPilot mailbox, the MWI on the user's phoneset is activated.

Remote user entries on the Meridian Mail and CallPilot systems

Calls routed between the Meridian Mail and CallPilot systems appear to both systems as local extension numbers. When a message is composed and sent between the Meridian Mail and CallPilot systems, a user hears a message envelope prompt indicating that the message was received from a telephone number instead of a mailbox number. If the user replies to the message, the reply is delivered to the telephone number using Delivery to Telephone (DTT).

To ensure that the reply is delivered to the sender's mailbox, you must define a remote user on the system on which the sender does not have a mailbox. You do not need to include a prefix in the extension DN. You must, however, include a prefix in the mailbox number. The prefix identifies the system on which the mailbox resides.

As mailboxes are moved between systems, add or delete remote user entries as required.

Remote user entries on remote systems

When creating remote user entries on remote systems for Meridian Mail or CallPilot users, specify the remote user's mailbox number and extension DNs, according to the dialing plan used between the remote system and the Meridian Mail or CallPilot system.

For example, if you selected "[Option 2: To use the existing dialing plan on one system and create a none dialing plan on the oth](#)" (page 99), then the mailbox numbers for users that belong to the system with the "none" dialing plan must include the mailbox prefix. The remote user entry for the CallPilot user must be configured on the remote system as mailbox 8338 1234, with extension DN 6 338 1234.

If remote user entries are not defined in this manner, then the remote system assumes that the caller has a mailbox on the system that matches the caller's private dialing plan prefix, and replies can be processed incorrectly. For example, if the CallPilot user is defined as a remote user with mailbox number 6 338 1234, the remote system can match the 6338 prefix as belonging to Meridian Mail. The reply is sent to the wrong system.

Remote user entries can be added automatically with the Names Across the Network feature in either Enterprise or VPIM networking on CallPilot. However, if multiple dialing prefixes are required for the system using the "none" dialing plan, you must add the remote user entries associated with that system manually to ensure that the correct telephone number is specified.

Networking limitations

When configuration of both systems on the same network is complete, the following limitations remain:

- If you selected ["Option 2: To use the existing dialing plan on one system and create a none dialing plan on the oth" \(page 99\)](#), then local users who want to address network messages between the CallPilot and Meridian Mail systems must use the appropriate prefixes.

For example, Meridian Mail users must dial 81 1234 to address a message to mailbox 1234 on CallPilot. Messages cannot be addressed between the Meridian Mail and CallPilot systems using only extension numbers.

- Remote users must address network messages to users on Meridian Mail and CallPilot according to the dialing plan used by each system. For example, if you selected ["Option 2: To use the existing dialing plan on one system and create a none dialing plan on the oth" \(page 99\)](#), then remote users can use ESN to address messages to users on the Meridian Mail system, but must use the mailbox prefix to address messages to users on the CallPilot system.

You must communicate the addressing requirements for each system to all remote sites in the network. If a remote user addresses a message incorrectly, the message is sent to the wrong system, and a non-delivery notification message is generated and returned to the sender.

- You can configure the Meridian Mail system as a backup to CallPilot so that calls can still be directed if CallPilot is down for any reason. However, networking messages from remote sites are not routed automatically to Meridian Mail under these conditions.

Broadcast messages

You must send broadcast messages individually on both Meridian Mail and CallPilot. Alternatively, you can set up distribution lists on each system containing only the users on that system.

You can address messages to the local and remote lists. When a message is sent to a remote list, the message is distributed to all members of the list with mailboxes on that remote system.

Contact Center integration

The Contact Center supports only one link for each system. If you integrate CallPilot with the Contact Center, you must move any channels that are dedicated to the link from Meridian Mail to CallPilot. You cannot run simultaneously Contact Center with Meridian Mail and Contact Center with CallPilot; this configuration requires more than one link.

Chapter 7

Troubleshooting

In this chapter

"Migration problems" (page 107)

"Correcting precheck inconsistencies" (page 108)

"Troubleshooting tools" (page 114)

"Meridian Mail data collection error messages" (page 115)

"CallPilot migration error messages" (page 116)

Migration problems

Reasons for errors

Most of the errors in a migration occur due to the following reasons:

- Differences between Meridian Mail and CallPilot occur. For example, CallPilot requires three or more digits for mailbox numbers.
- The data on the Meridian Mail system is inconsistent or corrupted.
- The data collected on the tape is corrupted.
- There was too much data for the tape.
- Some of the CallPilot components are not installed properly.
- Some of the data on the tapes is not accessible, and default values are substituted.

Note: This event can sometimes cause errors in the data migration of other components that depend on the true values. In such cases, appropriate warning messages appear.

Correcting errors

Generally, you can use one of the following methods to correct errors:

- Correct precheck inconsistencies and rerun the CallPilot migration utility.
- Change the values on Meridian Mail, recollect the data, and then perform the migration again.

If these methods do not correct the errors, contact your Nortel Technical Support representative.

To revert to the Meridian Mail system

It can be necessary to revert to the Meridian Mail system if you cannot resolve a migration failure. Before you retry the migration, you must execute the following on the CallPilot system:

Step	Action
1	Delete network data such as sites, locations, dialing plan information, and so on.
2	Delete the users.
3	Delete the classes of service (COS).
4	Delete the restriction/permission lists (RPL).
5	Delete the shared distribution lists (SDL).
6	Turn off the message waiting indicator (MWI).

—End—

Correcting precheck inconsistencies

Introduction

The precheck application runs automatically when the migrate.exe utility attempts to migrate Meridian Mail data according to the selected option. If the precheck finds inconsistencies in the existing Application Builder applications, the migrate.exe utility stops and displays the following message:

```
Analyzing system...
Found inconsistencies! Follow Manual Recovery Procedure
Unable to continue migration
```

The recovery procedures allow you to resolve the inconsistencies. You must determine which applications are inconsistent, then follow the first, second, and third level recovery procedures (in that order) to attempt to resolve the inconsistency.

After each level of recovery is performed, you must rerun the migration utility to determine if the recovery procedure is successful (in this case, the precheck application does not find any inconsistencies) and if you can complete the migration.

If the recovery procedures do not solve the inconsistencies, contact the Nortel Technical Support group for assistance.

To perform a first-level manual recovery procedure

Step	Action
------	--------


1	Open the ServerDataRepairLog.txt log file in the \nortel\temp\ folder.
---	--


2	Search for inconsistent applications, which are identified in the ServerDataRepairLog file as follows:
---	--

```
***Found Inconsistent Application!***
Application ID = <nnnn>
```

3	Open the file associated to each inconsistent application in Application Builder.
---	---

Note: When attempting to open an application file in Application Builder, record the application name associated with the application ID (<nnnn>). The application name is required if the application is later found to be linked in SDN; refer to "To Perform a third-level manual recovery procedure" (page 112).

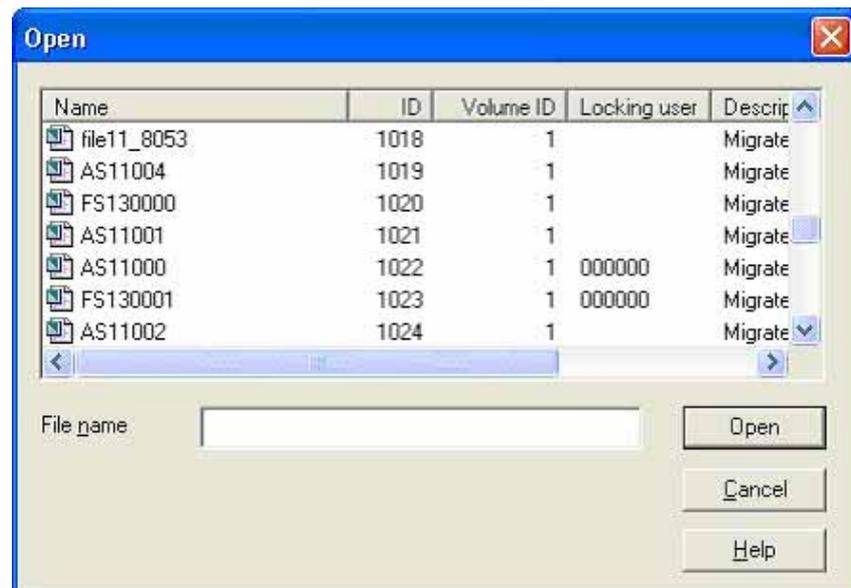

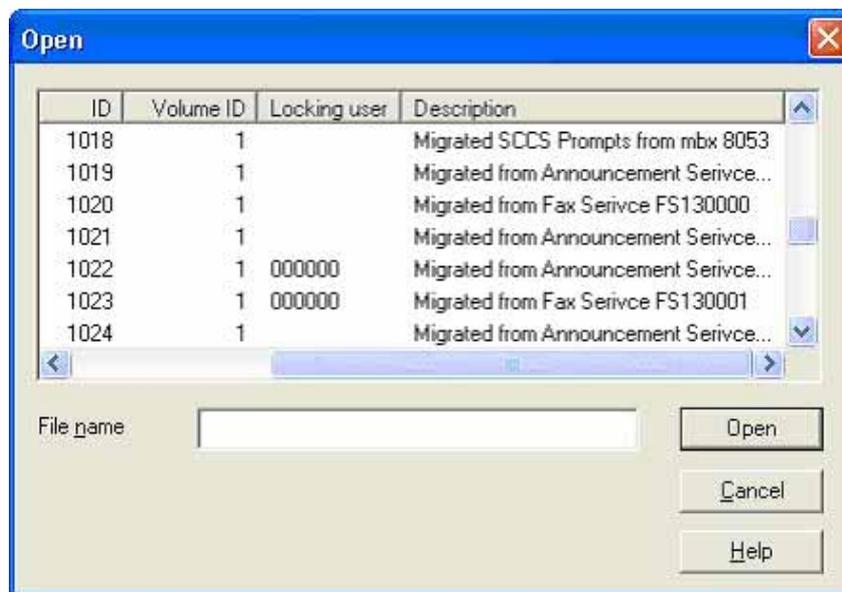

- 4 Save the file in Application Builder.
- 5 Repeat the procedure "To migrate Meridian Mail data to CallPilot" (page 61) or "To migrate Symposium Call Center Server voice segments and voice prompts to CallPilot" (page 67).

Note: If the precheck application finds inconsistencies in the same files, perform a second level manual recovery procedure.

—End—

To perform a second-level manual recovery procedure

Perform this procedure if the first level manual recovery procedure is performed, but the precheck function continues to find inconsistencies when the migration utility is rerun. The second level manual recovery procedure uses the appdelete tool to delete the corrupt applications.

If any of the following messages appears when executing the Application Builder Data Integrity Check and Deletion Tool, refer to the appropriate section in the section "To Perform a third-level manual recovery procedure" (page 112) or refer the trouble to Nortel Technical Support for corrective action.

Appdelete dialog message

Application <nnnn> needs to be de-coupled from the SDN in CallPilot Manager before this tool can delete it

Reference section

"Inconsistent application is still linked in SDN" (page 112)

Appdelete dialog message	Reference section
Manual Action Required: Due to the type of corruption, you must run the nmvutl support tool with the repopulate command after you are finish running this tool	"Inconsistent application has multiple versions" (page 113)
Application <nnnn> is either imported or exported. Are you sure you want to delete it without investigating further? YES/NO	N/A (see note)
Unknown exception - Manual intervention required	N/A (see note)

Note: Refer the trouble to Nortel Technical Support for corrective action.

Perform a second level recovery procedure as follows:

Step	Action
1	Open the <code>ServerDataRepairLog.txt</code> log file in the <code>\nortel\temp\</code> folder.
2	Search for inconsistent applications, which are identified in the <code>ServerDataRepairLog</code> file as follows: ***Found Inconsistent Application!*** Application ID = <nnnn>
3	Log in to the Support Tools with Distributor or higher-level access and start the appdelete tool. Result: The Application Builder Data Integrity Check and Deletion Tool dialog box appears.
4	Click Start . Result: The appdelete.exe utility runs its own precheck function and displays the inconsistent applications at the bottom of the screen.
5	Highlight the inconsistent application, and then click Delete Selected . Result: A dialog box with the following message appears: This will delete the <n> selected applications. Do you wish to continue (Yes/No)
6	Click Yes . Result: The highlighted application is deleted.
7	Repeat steps 5 and 6 for each inconsistent application identified in the <code>\nortel\temp\ServerDataRepairLog.txt</code> log file.

- 8 Repeat the procedure "To migrate Meridian Mail data to CallPilot" (page 61) or "To migrate Symposium Call Center Server voice segments and voice prompts to CallPilot" (page 67).

Note: If the precheck application continues to find inconsistencies, refer the trouble to Nortel Technical Support.

—End—

To Perform a third-level manual recovery procedure

Perform the appropriate procedure if the second-level manual recovery procedure executes, but the precheck function still finds inconsistencies when the migration utility is rerun.

The procedures provided in this section assume that the Application Builder Data Integrity Check and Deletion Tool dialog box is open on the screen.

Inconsistent application is still linked in SDN

Step	Action
1	Highlight the inconsistent application and then click the Delete Selected button. Result: The following message appears: Application <nnnn> needs to be decoupled from the SDN in CallPilot Manager before this tool can delete it.
2	Log in to CallPilot Manager. Result: The CallPilot Manager home page appears.
3	Click System > Service Directory Number. Result: The Service Directory Number - List window appears.
4	Scroll down in the Service DN column, and click the Service DN number associated with the inconsistent application name as identified in Step 1. Result: The SDN Details window appears.
5	Decouple the associated SDN by selecting any other application name, except the name associated with the inconsistent application ID.
6	Return to the Application Builder Data Integrity Check and Deletion Tool, and delete the inconsistent application as indicated in "To perform a second-level manual recovery procedure" (page 110).

- 7 Repeat Steps 1 through 6 for each inconsistent application that must be decoupled from an associated SDN.
- 8 Repeat the procedure "To migrate Meridian Mail data to CallPilot" (page 61) or "To migrate Symposium Call Center Server voice segments and voice prompts to CallPilot" (page 67).

Note: If the precheck application continues to find inconsistencies, refer the trouble to Nortel Technical Support.

—End—

Inconsistent application has multiple versions

Step	Action
------	--------

- | | |
|---|--|
| 1 | Highlight the inconsistent application, then click the Delete Selected button. |
|---|--|

Result: The following message appears:

Manual Action Required: Due to the type of corruption, You need to run the nmvutl support tool with the repopulate command after you are done running this tool.

Result: The appdelete.exe tool deletes the inconsistent application and prompts you to run the nmvutl support tool.

- | | |
|---|--|
| 2 | Repeat Step 1 for each inconsistent application with multiple versions. |
| 3 | Access the Support Tools and run the AppBuilder Version Manager utility (nmvutl) as follows: <ol style="list-style-type: none"> a. select AppBuilder tools from the main menu. b. select AppBuilder Version Manager (nmvutl) from the next menu. |
| 4 | type <code>repopulate</code> at the command line and press Enter . |

Results: The nmvutl utility repopulates the applications.

- | | |
|---|--|
| 5 | Repeat the procedure "To migrate Meridian Mail data to CallPilot" (page 61), or "To migrate Symposium Call Center Server voice segments and voice prompts to CallPilot" (page 67). |
|---|--|

Note: If the precheck application continues to find inconsistencies, refer the trouble to Nortel Technical Support.

—End—

Troubleshooting tools

Use the troubleshooting tools to determine why a migration failed. These tools provide you with detailed logs that can help you determine the causes of a failed migration.

Debug tool

Use the debug tool to create a trace file that contains detailed information on the migrated data and its attributes. You can then identify migration errors in the debug trace file. To turn on the debug tool, launch the migration utility, type `debug` at the `CI>` prompt, and press **Enter**. After you launch the debug tool, proceed with the migration.

The debug tool creates the `MigrationTrace.txt` file found in the `D:\nortel\MPCX\Migration` folder. The `MigrationTrace.txt` can be so large that you cannot open it. Use the debug tool only as needed; do not use it when performing a migration for the first time.

LDAP trace tool

The Lightweight Directory Access Protocol (LDAP) trace tool creates a migration log, which identifies the location of the LDAP errors registered during the migration and provides the LDAP error messages.

Before launching the LDAP trace, you must obtain the migration process ID.

1. Launch the migration utility.
2. Type `nmldptrconfig` at the `CI>` prompt and press **Enter**. The migration utility displays the ID of the running process.

To turn on the LDAP trace tool, type the following string at the `CI>` prompt:
`nmldptrconfig <process ID> <debug level> <console log> <file log> <unified trace>`

The following list details the parameters used in conjunction with the `nmldptrconfig` command:

- `<process ID>` — a number designating the process that uses LDAP
- `<debug level>` — a digit from 0 through 3 (level 3 provides the most detailed trace)
- `<console log>` — yes or no; since the migration utility does not use this option, enter no
- `<file log>` — yes or no; enter yes to generate the LDAP trace log
- `<unified trace>` — yes or no (the migration utility does not use this option; enter no)

The following is an example of string entered at the CI> prompt:
nmlpdcconfig 146 2 no yes no.

After you launched the LDAP trace tool, proceed with the Meridian mail data migration to CallPilot.

When the migration is completed, open the log file generated by the LDAP trace tool. You can find the log in the D:\nortel\logs folder. This is an example of ldap trace file name: migrate_142_20040115.txt, where 142 is the process ID that you enter at the prompt and 20040115 is the file creation date in the format *yyyymmdd*.

Meridian Mail data collection error messages

Error code	Message
cMMer001 = 1	Could not retrieve Mail Box Data for given Mailbox
cMMer002 = 2	Could not rewind tape
cMMer003 = 3	Could not write tape descriptor file
cMMer004 = 4	Could not write org profile data
cMMer005 = 5	Could not write COS data
cMMer006 = 6	Could not write RPL data
cMMer007 = 7	Could not write system greeting data
cMMer008 = 8	Could not group data for org profile group
cMMer009 = 9	Could not write SDL data
cMMer010 = 10	Could not write Group data for SDL
cMMer011 = 11	Could not write directory user data
cMMer012 = 12	Could not write directory user group data
CMMer013 = 13	Could not write local user data
cMMer014 = 14	Could not write local user group data
cMMer015 = 15	Failed to retrieve networking information
CMMer016 = 16	Could not write voice services data
cMMer017 = 17	Could not write voice services group data
cMMer019 = 18	Could not write end tape descriptor file
cMMer018 = 19	Could not write end of file marker
cMMer020 = 20	Error unloading tape
cMMer021 = 21	Failed to create MPCX Cabinet
cMMer022 = 22	Personal class of user messages not migrated
cMMer023 = 23	Error reading message header

Error code	Message
cMMer024 = 24	Message not migrated. RC gives message type as defined in mt_types
cMMer025 = 25	Empty message not migrated
cMMer026 = 26	***unused***
cMMer027 = 27	***unused***
cMMer028 = 28	Error opening Mailbox for cabinet for Message dumping
cMMer029 = 29	Error finding messages in MailBox
cMMer030 = 30	Error opening an individual message or not a message file
cMMer031 = 31	Error writing messages to tape
cMMer032 = 32	Empty outcalling AD record
cMMer033 = 33	Empty AMIS AD record
cMMer034 = 34	Empty FAX AD record
cMMer035 = 35	Unable to retrieve network site information
cMMer036 = 36	Unable to retrieve default translation information
cMMer037 = 37	Unable to retrieve network configuration information

CallPilot migration error messages

Error code	Message
GENERAL error messages 000–099	
000	File open error
001	The Utility is not aware of the specified data type
002	The API call failed
003	Retrieving MMail data failed
004	Unknown Exception encountered
005	Error in connecting to LDAP client
006	NMobj_Init() function call failed
007	Error disconnecting from LDAP client
008	The NMobj_Shutdown() function call failed
009	The Extract() function call failed
010	The structure read from database using API failed
011	Invalid Object handle passed
012	Error while deleting the contents using the API
013	Only one row (record) is expected in the database table
014	Unknown MMail data type found

Error code	Message
015	Object creation failed due to internal system error
016	The field value is not found in the staging file
017	MMINVALID data type returned by the extract() function
018	MMUNKNOWN data type returned by the extract() function
019	There was an error while data transfer from the tape; Please try again
020	The handling of treatment type USEDEFAULTCD is not yet implemented
021	The handling of treatment type ENUMERATEDCD is not yet implemented
022	There was an error in file pathname creation, could not delete the files; Aborting
023	Invalid error code (value out of range)
024	Could not obtain the current working directory path name
025	Could not obtain the MMFS volume list on this server
026	Could not obtain the MMFS volume information
027	The available voice block limit has been reached, only 5% free space now available on the volume
028	The available text block limit has been reached, only 5% free space now available on the volume
029	Premigration system check failed
030	LDAP client Search failed
031	LDAP client Update failed
032	LDAP client Add failed
033	LDAP client Delete failed
MAPFILE error messages 100–199	
(MAPFILE errors refer to problems related to the mapping of the Meridian Mail data to CallPilot data. When you receive a MAPFILE error, call your support organization.)	
100	Map directory creation error
101	No record was found in the Map file for the element
102	Map line index does not match with the C structure element ID
103	Unknown Treatment code
104	Map record formatting error
105	Invalid token encountered
106	The class name must not be left blank
107	The attribute name must not be left blank

Error code	Message
108	The Data Type must not be left blank
109	MM Data Type must be specified
110	The Key field must have valid treatment code
111	The Special code must be specified
112	Default value must be specified
113	Unexpected number of tokens found in a map record
114	All the MMail Ids (Group, File & Field) must be specified
115	If the MMail Ids are specified then Treatment code must be defined
116	The value obtained from MMail data file is out of range
117	The string length obtained from MMail data file is out of range
118	The MMail field data type returned from Extract() is different
119	The Map record line length exceeds the maximum line length
120	If the Treatment code is specified then MMail Ids must be defined
121	Cannot obtain the key field value
122	The value obtained from MMail data file is out of range

MMINPUT error messages 200–299**(MMINPUT errors refer to problems related to accessing the tape drive or files.)**

Debug messages: 200–209	200 — TapeRead Debug
	201 — FileCreate Debug
	202 — FileOpen Debug
	203 — FileRead Debug
	204 — FileWrite Debug
	205 — Extract Debug
Debug messages: 200–209 (continued)	206 — GetToken Debug
	207 — FileDump Debug

Error code	Message
Tape IO messages: 210–219	210 — TapeOpen Function
	211 — TapeLoad Function
	212 — TapeRead Function
File IO messages: 220–229	220 — SetPath Function
	221 — FileCreate Function
	222 — FileWrite Function
	223 — FileRead Function
	224 — FileOpen Function
	225 — DeleteFile Function
	226 — ReadFile Function
Other messages: 230–239	230 — GetFile Function
	231 — GetToken Function
	232 — GetTapeDescriptor Function
	233 — InitTape Function
	234 — Extract Function
	235 — GetVoiceFile Function
	236 — GetX and GetVoiceX Function

SYSMOD error messages 300–399
(SYSMOD errors refer to problems related to either the migrating system or customer profiles.)

Error code	Message
300	The MM RPLID value obtained from staging file is zero; using default value.
301	The RPLID mapping failed
302	Invalid value obtained for Alarm Filter from the MMail data; using default value
303	The Customer greetings FID creation error
304	Invalid FID; Cannot migrate the Customer greetings
305	MMFS file open error; skipping the customers greeting data migration
306	No voice data file for the System greetings
307	MMFS file load error; Retaining the previous Customer greetings voice data
308	The RP list is currently in use (DB integrity check failure); Retaining the RPL
309	The RPL header could not be removed due to internal error; Retaining the RPL
310	No RPL codes found in the mail data
311	The data value for throttling feature could not be obtained
312	The data value for throttling interval parameters could not be obtained

USERMOD error messages 400–499

(USERMOD errors refer to problems related to migrating user profiles, greetings, and mailbox classes.)

401	Error obtaining the User List from the NGen database
402	COSID mapping failed, unable to find a match
403	The address could not be validated due to an internal error
404	Invalid address
405	NMadd_DestroyAddressList call failed
406	The entry of MMail COS Number already exists in the COSMAP list
407	Error obtaining the DN list for the user
408	Invalid COS Number obtained from MMail data
409	Personal COS migration is not supported
410	Invalid FID; Cannot migrate the spoken name data
411	MMFS file open error; skipping the spoken name data migration
412	No voice data in the file for spoken name
413	MMFS File load error; skipping the spoken name data migration

Error code	Message
414	Invalid FID; Can not migrate the greetings data
415	Invalid recID provided for the greetings FID, skipping greetings migration
416	MMFS file open error; skipping the Greetings data migration for the user
417	No voice data file for the User greetings
418	MMFS file load error; skipping the migration of the greetings voice data file
419	Error in creating the List of the Users to be migrated
420	More than one record found in the database for the given search criteria; only one record is expected
421	Unknown User type obtained from MM data
422	The user for whom the PDL is being updated does not exist in the database
423	The PDL list could not be obtained
424	Unknown Address type obtained from MMail
425	The MM mail PDL record data can be corrupted
426	This Address type must not be specified in a PDL record
427	The DN list is empty
428	The User COS Number field value could not be obtained
429	The System COS number field value could not be obtained
430	No SDL codes found in the mail data
431	The number of digits in the Mailbox is less than 3 digits long which makes it an invalid mailbox on CallPilot
432	Could not search the specified user in the database
433	Could not resolve the user since found more than one entries in database for a given search criteria
434	Invalid User type obtained from MMail
435	Cannot add any more Mailboxes/Users, The mailbox limit is reached
436	There is no available MMFS volume, aborting User data migration
437	Less than 5% free space on this Volume, this volume will not be available for data migration
438	Voice storage limit of the COS was out of range
439	The first name field was empty. It is a mandatory field for CallPilot
440	The last name field was empty. It is a mandatory field for CallPilot

Error code	Message
441	The user Type field value could not be obtained
442	More than one entry found in database
MSGMOD error messages 500–599 (MSGMOD errors refer to problems related to migrating user messages.)	
500	The Voice data file is empty
501	The "From" address list could not be obtained
502	The user name could not be obtained
503	The user surname could not be obtained
504	The user mailbox number could not be obtained
505	The user site and location IDs could not be obtained
506	The user primary DN could not be obtained
507	There was an error obtaining the user information, skipping this User messages migration
508	Error reading the User entry
509	The User mailbox does not exist on the system
510	Could not resolve the user since found more than one entries in database for a given search criteria
511	There was an error in obtaining the voice message data
512	There was an error while creating the "To" and "From" address lists
513	Could not delete the message file, Please remove the message manually later
514	Could not obtain the voice data block, can not continue further
515	There was an error obtaining the Message Attachment information
516	Error in message attachment creation
517	Could not obtain the voice data block, can not continue further
518	Could not obtain the Message tag value
519	The volume ID could not be obtained for this user
520	The free space on MMFS volume is now less than 5%
521	The senders address data record is not of Text type, can not obtain the From address information
522	You have reached the storage limit of the user mbox in MMFS volume
NETMOD error messages 600–699 (NETMOD errors refer to problems related to migrating network data.)	
601	The Location code array could not be obtained from MM data files

Error code	Message
602	The location Overlap code array could not be obtained from MM data files
603	Invalid code type obtained from MM data
604	The database contains an invalid server entry which must be removed manually later
605	The Network prefix array is empty
606	The Network codes array is empty
607	The Meridian Networking is not supported on CallPilot; Using the Enterprise Networking protocol instead
608	The Meridian Networking is not supported on CallPilot; Using the AMIS Networking protocol instead
609	The Meridian Networking is not supported on CallPilot; Using the VPIM Digital Networking protocol instead
610	No network protocols are supported on this server
611	The AMIS protocol is not supported on this server; Using the Enterprise Networking protocol instead
612	The AMIS protocol is not supported on this server; Using the VPIM Digital Networking protocol instead
613	The Enterprise Networking protocol is not supported on this server; Using the AMIS Networking protocol instead
614	The Enterprise Networking protocol is not supported on this server; Using the VPIM Digital Networking protocol instead
615	Invalid value obtained for the MM server connection protocol field
616	The Server ID mapping failed
617	The Location ID mapping failed
618	There are currently no server records defined on the system
619	Location code array could not be obtained
620	Location overlap array could not be obtained
621	Location code type array could not be obtained
622	The source and destination Ids in the list are same
623	The existing server record could not be updated
624	Since the protocol is changed, Administrator must review the contents of Server and Connection records
625	The location Overlap code array could not be obtained from MM data files
626	Invalid value obtained for the MM Server Status field
627	Invalid value obtained for the MM location Dialing plan field

Error code	Message
628	Invalid value obtained for the MM dialing CLID field
629	The Maximum Server limit reached, skipping further Server updates
630	The Maximum Locations limit reached, skipping further Location updates
631	The Maximum Server limit reached, skipping further Server Connection updates
632	There was error while updating the network cache; the data migration does not work properly
APPBMOD error messages 700–799 (APPBMOD errors refer to problems related to migrating Application Builder data, such as voice menus, announcements, and fax data.)	
700	Error in opening a MMFS File Cabinet
701	Error in closing the MMFS File Cabinet
702	Error in creation of a MMFS File Cabinet
703	Unknown error while opening the File cabinet
704	Could not obtain the Service Type for the Service
705	Could not obtain the Service ID for this Service
706	Error in creation of a MMFS File
707	Error in adding the MMFS File into file cabinet
708	Unknown error while opening the MMFS File
709	Error in closing the MMFS File
710	Unknown Service Type
711	Error in removing the MMFS File from a cabinet
712	Error in migrating the segments into a MMFS file
713	Error in obtaining the Segment Data File name
714	Error in obtaining the The Record Type and ID for the Segment
715	Error in creation of a record in a MMFS File
716	Error in record search in a MMFS File
717	Error in data loading into the record of a MMFS File
718	Error in MMFS File data Flush
719	Unknown record type encountered
720	Error creating App Builder application
721	Error adding segment to SCCS prompt file
722	Error updating voice file for App Builder application

Appendix A

Meridian Mail and CallPilot comparison

In this appendix

"Overview" (page 125)

"CallPilot system setup" (page 127)

"Comparing switch and server configuration" (page 130)

"Comparing call routing" (page 136)

"Comparing networking solutions" (page 140)

"Comparing Symposium Call Center Server voice services" (page 141)

"Comparing Meridian Mail and CallPilot terminology" (page 143)

Overview

Introduction

This chapter presents a high-level overview of the differences between call routing in CallPilot and Meridian Mail.

The most important difference is that CallPilot uses the Controlled Directory Number (CDN) queue, which is similar to the Automatic Call Distribution (ACD) queue in Meridian Mail. Calls in the CDN queue are managed by the CallPilot system, while calls in the ACD queue are managed by the Meridian 1 switch.

Setup and call routing comparison

The following table compares the setup and call routing elements for CallPilot and Meridian Mail.

Comparison issue	Meridian Mail	CallPilot
Customer	Single customer or multiple customers (corresponding to Meridian 1 tenants)	Single customer only
Application Module Link (AML) connection	RS-232 serial cable attached to the backplane	ELAN subnet
Call routing from switch	ACD DN	CDN
Channels and ports	Interface to virtual agents programmed as SL-1* telephone sets on the switch	Interface to multimedia agents programmed as 2008 Digital (Aries) telephone sets on the switch
Queuing	Controlled by an ACD DN managed by the switch	Controlled by a CDN managed by CallPilot
ACD DN overflow	The switch provides ACD DN overflow from one ACD queue to another ACD queue.	The switch does not permit the ACD DN to overflow to a CDN. Therefore, the ACD DN overflow is not possible with CallPilot, which uses a CDN model for call management and control. If ACD DN overflow is desired, then use either Symposium Express or Contact Center integrated with CallPilot as a viable alternative that provides enhanced call routing capabilities.
Meridian 1 voice connectivity	ENET card in the Network module on Meridian 1 (EC or larger system)	<ul style="list-style-type: none"> • 201i server: DS0 channels on the IPE shelf backplane • tower or rackmount servers: DS0 channels on an MGate card connected to an MPB16-4 (NTRH20BA) card
Routing a call to a service	<ul style="list-style-type: none"> • phantom DN's DCFW to a Meridian Mail ACD DN • dummy ACD queues NCFW to a Meridian Mail ACD DN 	<ul style="list-style-type: none"> • phantom DN's DCFW to a CallPilot CDN • dummy ACD queues NCFW to a CallPilot CDN

Comparison issue**Meridian Mail****CallPilot**

CallPilot system setup

Introduction

The CallPilot setup is different from the Meridian Mail setup. A CallPilot system has three layers:

- server hardware/software layer
- Windows Server 2003 layer
- CallPilot application layer

All three layers are required for CallPilot to take calls. You must set up and configure each layer individually.

Required documentation

Refer to the CallPilot documents listed in [Chapter 2 "Understanding the migration process"](#) (page 11), for information on completing a CallPilot installation.

Also refer to the most recent version of the *Distributor Technical References* (DTR). To obtain the most recent DTR, refer to the Nortel Partner Information Center (PIC) at <http://www.nortel.com/pic>

To access the PIC, you must be a registered Nortel distributor.

Sample hardware setup


The diagrams on pages "[Sample network setup: tower or rackmount server with Meridian 1](#)" (page 128) through "[Sample network setup: 201i server with Communications Server 1000](#)" (page 129) show the CallPilot network setup for the Meridian 1 and Communications Server 1000 systems.

A Web browser must be installed on a PC that has IP connectivity to the CallPilot server. Use the Web browser to connect to the CallPilot Manager Web server, and then to log in to the CallPilot server and administer the system.

The CallPilot server is shipped from the factory with the CallPilot Manager Web server already installed. To install the CallPilot Manager Web server on a stand-alone server, refer to the *Software Administration and Maintenance guide* (NN44200-600).


Sample network setup: tower or rackmount server with Meridian 1

The following diagram shows a network setup with a tower server and a Meridian 1 switch. The same network setup applies when the CallPilot server is a rackmount server.

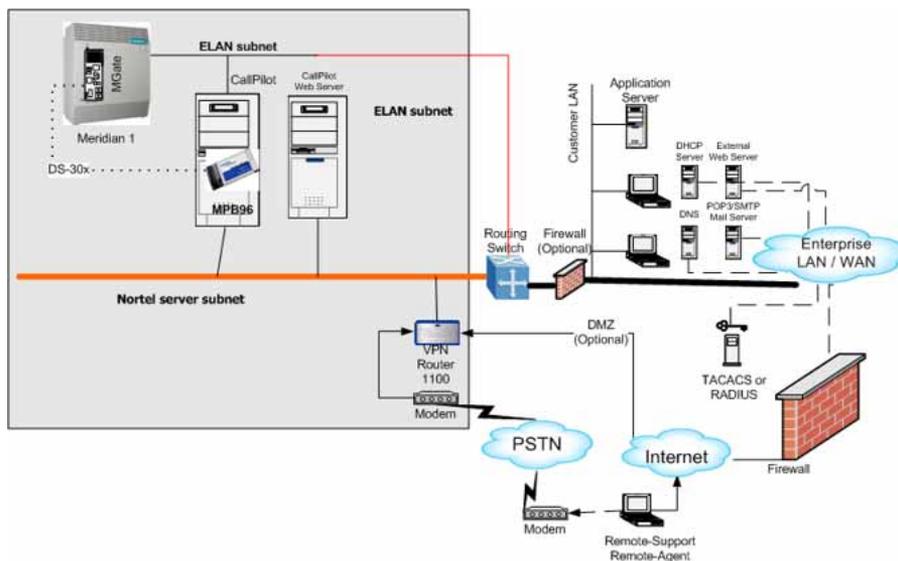


Sample network setup: tower or rackmount server with Communications Server 1000

The following diagram shows a network setup with a tower server and a CS 1000 system. The same network setup applies when the CallPilot server is a rackmount server.

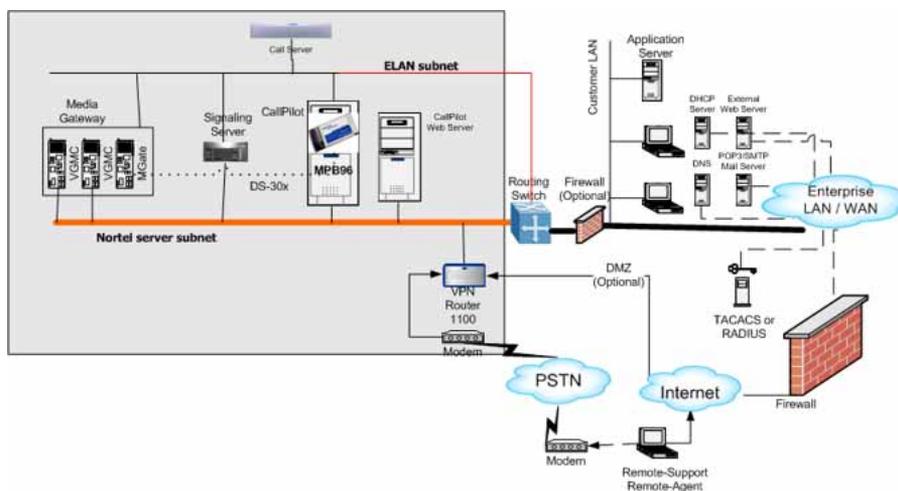


Sample network setup: 201i server with Meridian 1

The following diagram shows a network setup with a 201i server and a Meridian 1 switch.

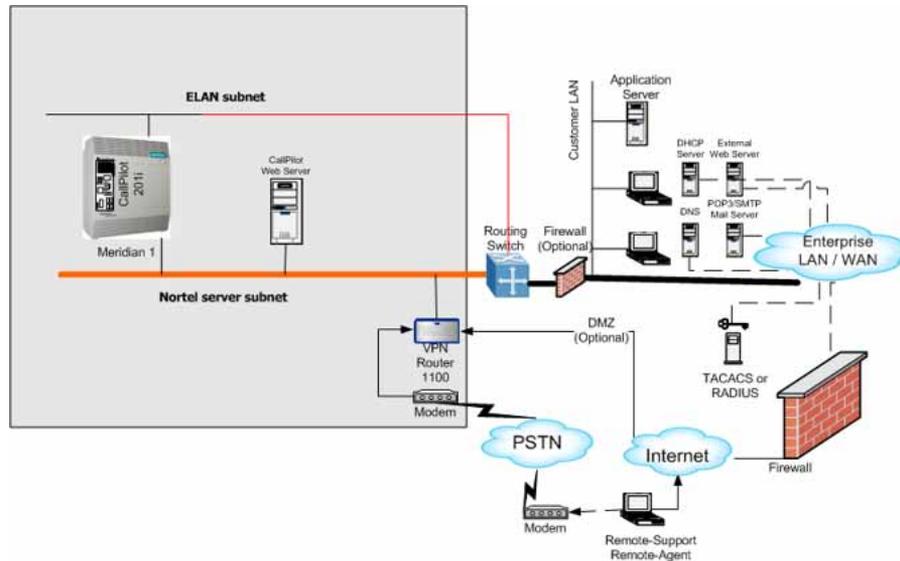


Sample network setup: 201i server with Communications Server 1000

The following diagram shows a network setup with a 201i server and a Communications Server 1000 system.

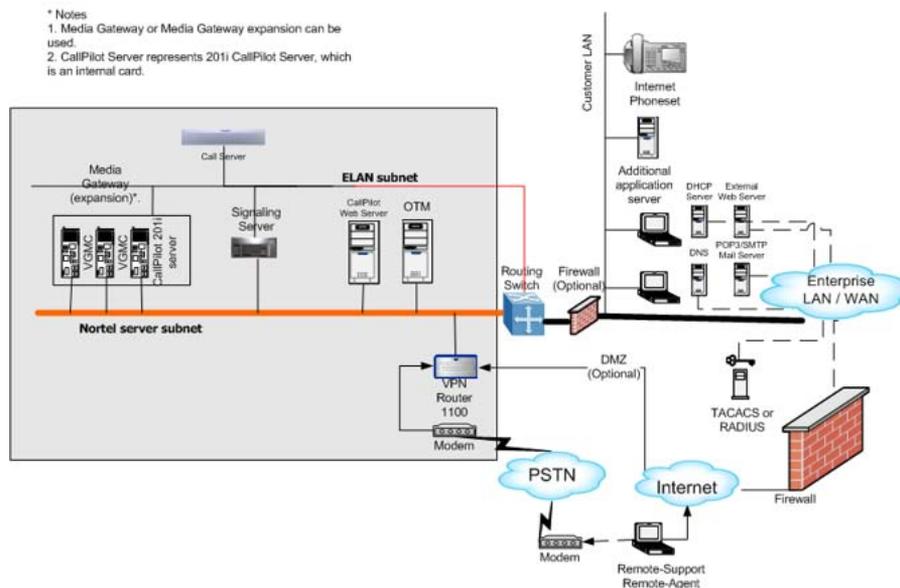


Sample network setup: rackmount server with SL-100

The following diagram shows a network setup with a rackmount server and an SL-100 switch.

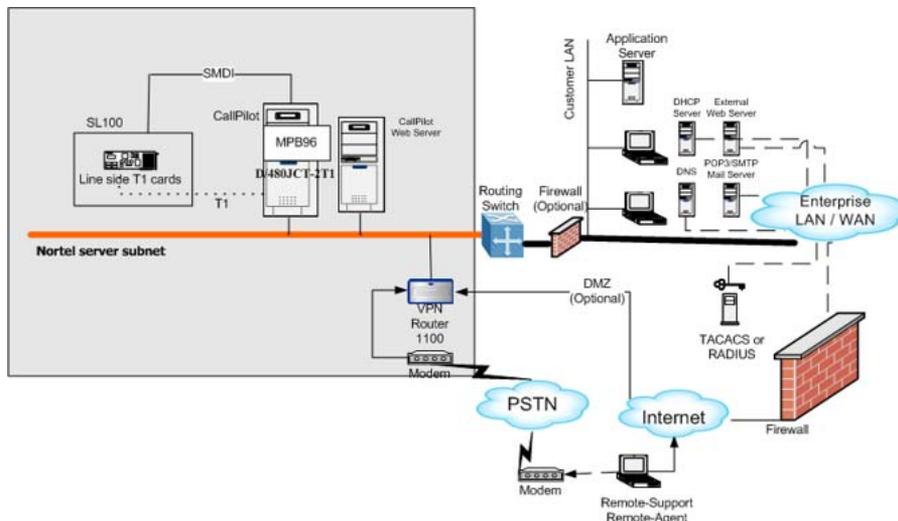

Sample network setup: rackmount server with DMS-100

The following diagram shows a network setup with a rackmount server and a DMS-100 switch.

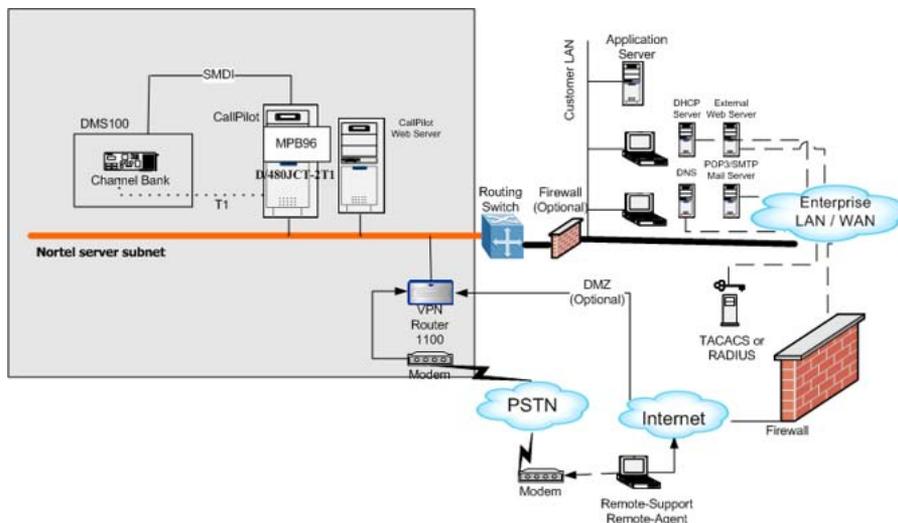

Comparing switch and server configuration

Overview

This section defines key concepts for CallPilot configuration, and then highlights switch and server configurations in CallPilot and Meridian Mail.

CDN queue

For CallPilot, configure one Controlled Directory Number (CDN) on the switch as follows:

- a primary CDN for Voice Messaging
- a secondary CDN for Multimedia Messaging (including fax capability)

CallPilot manages calls in the CDN queue, while the Meridian 1 switch manages calls in an ACD queue.

Calls are routed to the CDN queue directly or by way of a phantom DN or a dummy ACD queue, which is then forwarded to the CDN.

How CallPilot uses CDNs

Normally, a CDN operates in control mode. In control mode, the CallPilot server controls call treatment and call routing. The switch simply provides routing to CallPilot. The server specifies the type of default treatment to be given to waiting calls. It processes the calls on a first-come, first-serve basis and determines the DS0 channel to which the call is routed. DS0 channels are configured as agents of an ACD queue.

A CDN can also operate in default mode, that is, CallPilot is offline or the Application Module Link (AML) is down. In default mode, the switch takes over call routing control. Incoming calls receive default treatment provided by the default ACD DN associated with the CDN.

Use the Configuration Wizard to configure the CDNs on CallPilot. Refer to the configuration and testing guide for your switch (see "[Reference documents](#)" (page 18)).

Phantom DN

Instead of using telephone sets or dummy ACD queues to route calls, CallPilot can use virtual telephone sets that exist only in software and have no associated hardware. The directory number (DN) associated with one of these virtual telephone sets is called a phantom DN.

Services that must use phantom DNs

Nortel recommends that you use a phantom DN for each service that callers dial directly, such as the following:

- any service created with Application Builder
- Speech Activated Messaging
- Custom Commands
- Voice Item Maintenance
- Fax Item Maintenance

- Express Voice Messaging
- Express Fax Messaging

Creating a phantom DN

To create a phantom DN, first create a phantom loop, then define a terminal number (TN) within that loop. Each phantom TN is assigned a DN (the phantom DN). This DN becomes the number that is dialed for a service when you enter the DN in the Service Directory Number Table.

For instructions on creating the phantom DN, refer to the configuration and testing guide for your switch (see "[Reference documents](#)" (page 18)).

Service Directory Number table

In the Service Directory Number (SDN) table, associate the CallPilot services with the CDNs and phantom DNs that you configured on the switch.

What the SDN table controls

The SDN Table specifies which service must be activated when a number is dialed. In addition, the SDN configuration controls:

- the type of channel that the service acquires (voice, fax, or speech recognition)
- the number of channels allocated to the service (the minimum number of channels guaranteed to a service for simultaneous use, and the maximum number of channels that you can use at one time)
- the definition of session behavior for certain services, such as those created with Application Builder

When a call arrives at a CDN queue either directly or indirectly from a phantom DN, the switch provides the caller with ringback treatment. Simultaneously, CallPilot looks up the dialed DN in the SDN table.

Types of SDNs

The SDNs are classified into two categories:

- inbound SDNs, which require DNs on the switch
Services that callers dial directly require inbound SDNs. An inbound SDN corresponds to either a CDN or a phantom DN on the switch.
- outbound SDNs, which do not require DNs on the switch
Callers do not dial outbound SDNs. The system uses outbound SDNs to place outbound calls for services such as Outcalling and Networking. Because outbound SDNs do not accept incoming calls, a corresponding phantom DN or CDN is unnecessary on the switch.

Note: If you are integrating Contact Center with CallPilot, ensure that the outbound SDNs are also configured on CallPilot for the channels that are dedicated to ACCESS and IVR.

ACD multimedia agents

Automatic Call Distribution (ACD) is a feature on the Meridian 1 switch that allows a number of telephone sets connected to the switch, known as agents, to share equally in the answering of incoming calls. In CallPilot, the call queuing capability of ACD is not used (the CallPilot CDN manages the queuing), but the call handling capability of ACD agents is used.

How CallPilot uses ACD virtual agents

All ACD agents that service CallPilot are put into a single ACD agent grouping. These agents correspond to DS0 channels on the CallPilot server. Agents are programmed in Overlay 11 as 2008 Digital (Aries) sets with a Multimedia Messaging Allowed (MMA) class of service. However, the agents are not physical telephone sets, but Terminal Numbers (TNs) that are programmed to appear as real digital sets to the switch.

CallPilot and Contact Center integration

If you are integrating CallPilot and Contact Center, you must create two ACD queues: one for ACCESS Voice and the other for Interactive Voice Response (IVR) service.

Multimedia processing units

Calls that are sent to CallPilot services need processing power that converts data back and forth between voice, fax, or speech-recognition data and digital signals.

The DS0 channels establish the connection between the switch and the server. However, the DS0 channels do not have any signal-processing capability. The DS0 channels terminate on multimedia processing units (MPUs) that perform the necessary signal processing.

The MPUs provide the following types of signal processing:

- voice playback and recording
- tone detection (DTMF, call progress, fax CNG, modem)
- tone generation
- speech recognition

Eight MPUs are provided on the 201i server. Sixteen MPUs are provided on the MPB16-4 board (NTRH20BA) on the tower and rackmount servers. Additional MPUs reside on the MPC-8 cards, which are optionally installed.

Multimedia channels

A multimedia channel comprises a DS0 channel plus one or more MPUs. The DS0 channel provides the connection between the switch and the server, and the MPUs provide the processing power.

Types of multimedia channels

Different services process different types of media, and certain types of media need more channel resources to process the services. To handle the resource requirements, three types of multimedia channels handle the various types of CallPilot services.

Each type of multimedia channel terminates on a different number of MPUs, based on the volume of processing power that is required. For example, integrated voice and fax services require twice as much processing power as voice-only media. A multimedia channel, therefore, terminates on two MPUs.

Channel type	Description	Number of MPUs required
Voice	One-to-one correspondence between channels and MPUs.	1
Fax	Integrated fax and voice data need twice as much processing power as voice-only media. Fax channels support both fax and voice media.	2
Speech recognition (ASR)	Speech-recognition data needs four times as much processing power as voice media.	4

Summary of switch and server configuration

Meridian Mail	CallPilot	CallPilot reference
On Meridian 1	On Meridian 1	
Create one or more ACD queues for call handling.	Create one ACD agent queue to hold all agents that service CallPilot.	configuration and testing guide for your switch (see "Reference documents" (page 18)) <ul style="list-style-type: none"> Configuring the ACD agent queue Configuring server channels as ACD agents

Meridian Mail	CallPilot	CallPilot reference
On Meridian 1	On Meridian 1	
		<ul style="list-style-type: none"> Defining the default ACD DN <p>Note: If you are integrating CallPilot and Contact Center, you must create two ACD queues: one for ACCESS Voice, and the other for IVR service.</p>
Define the ACD agents.	Define the ACD agents.	<p>configuration and testing guide for your switch (see "Reference documents" (page 18))</p> <ul style="list-style-type: none"> Configuring the ACD agent queue Configuring server channels as ACD agents Defining the default ACD DN
Not applicable	Create two CDN queues: a primary CDN for Voice Messaging and a secondary CDN for Multimedia Messaging.	<p>configuration and testing guide for your switch (see "Reference documents" (page 18))</p> <ul style="list-style-type: none"> Configuring CDN queues for messaging services
Create a dummy ACD DN for each Meridian Mail service that callers must dial directly.	Create a phantom DN for each service that callers must dial directly.	<p>configuration and testing guide for your switch (see "Reference documents" (page 18))</p> <ul style="list-style-type: none"> Configuring phantom DNs
In Meridian Mail	On the CallPilot server	

Meridian Mail	CallPilot	CallPilot reference
On Meridian 1	On Meridian 1	
Enter the ACD DN and agent TNs into the Channel Allocation Table.	Enter the CDNs and agent TNs that are configured on the switch in the Configuration Wizard.	Refer to the following topics in the Configuration Wizard online Help: <ul style="list-style-type: none"> • Entering Meridian 1 or Communications Server 1000 switch and channel information • Entering CDN information
Add each ACD queue DN that is configured on the switch to the VSDN table.	Add the CDNs and phantom DN that are configured on the switch to the Service Directory Number table.	CallPilot Manager online Help <ul style="list-style-type: none"> • Configuring CallPilot services <i>CallPilot Administrator's Guide</i>

Comparing call routing

Introduction

This section describes the differences between call routing in Meridian Mail and CallPilot.

Call routing overview

In Meridian Mail, the switch handles call routing. The switch accepts the incoming call and places it in an ACD queue to await the first available ACD virtual agent (the first free Meridian Mail port).


CallPilot uses a CDN to handle call routing. When a caller dials a number to access a service, the switch accepts the incoming call and routes the call to the CallPilot CDN. CallPilot queues the call and directs the call to the first available free channel.

See the following examples:

Examples	CallPilot	Meridian Mail
Call flow diagram	page "Sample call flow in CallPilot" (page 137)	page "Sample call flow in Meridian Mail" (page 139)

Examples	CallPilot	Meridian Mail
Call setup diagram	page "CallPilot setup" (page 137)	page "Meridian Mail setup" (page 139)
Call flow description	Page "What happens when a caller dials a CallPilot service" (page 138)	page "Meridian Mail setup" (page 139)

Sample call flow in CallPilot

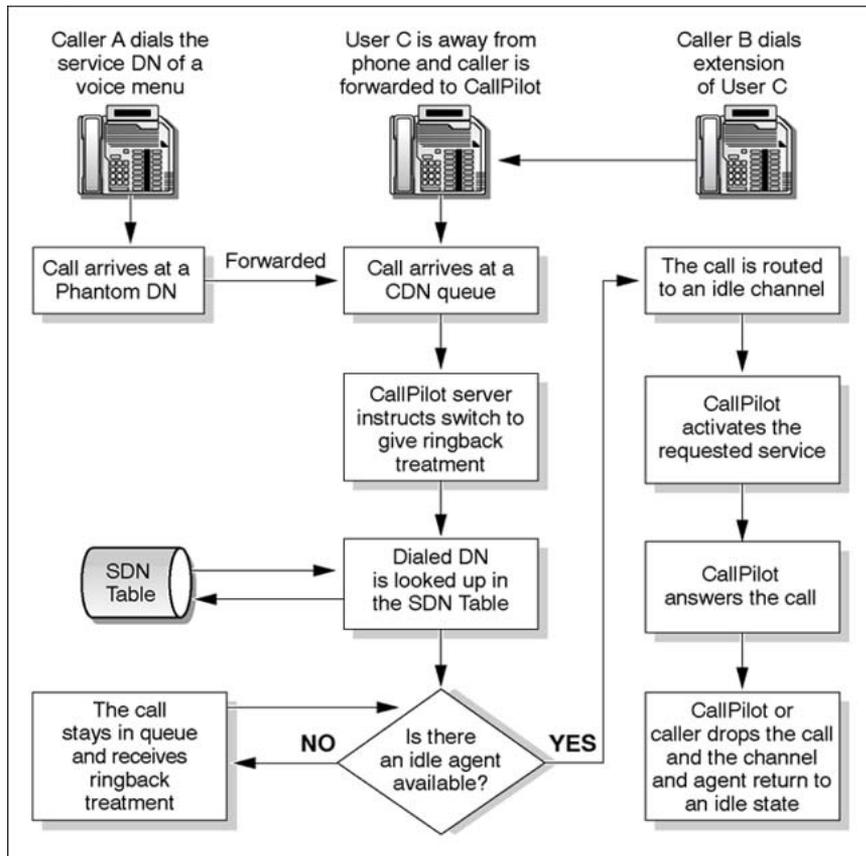

G101145

CallPilot setup


In this example, two CDN queues are configured:

- Voice Messaging (6030)
- Multimedia Messaging (6050)

Two phantom DN's are configured:

- 6090 is the DN for a menu service (without fax items)

- 6095 is the DN for Fax Call Answering

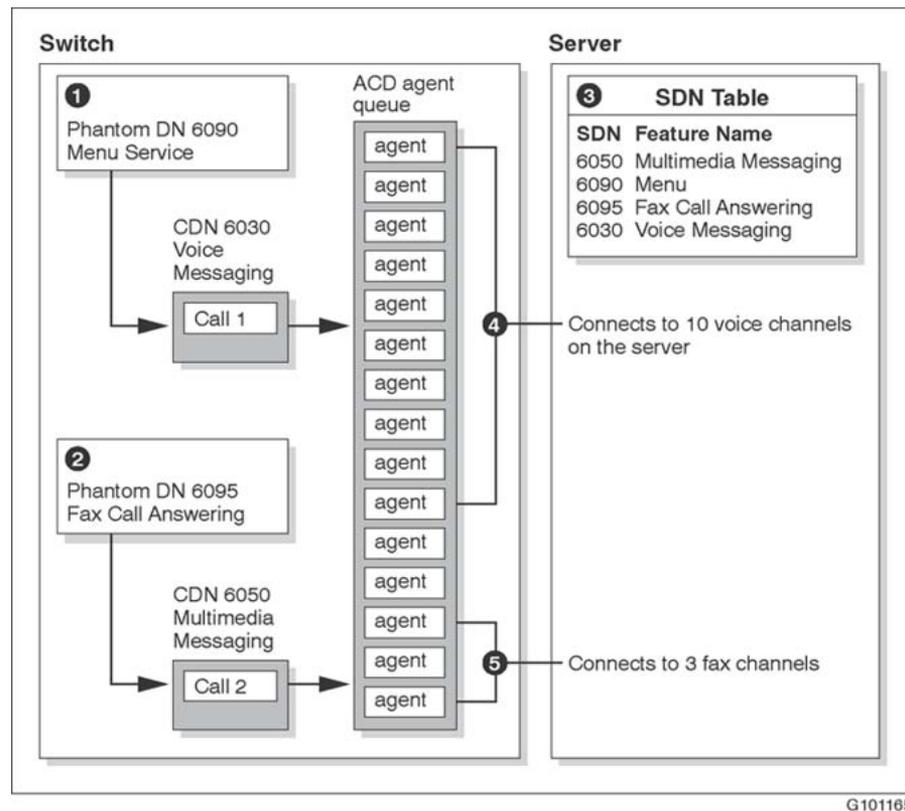


What happens when a caller dials a CallPilot service

Refer to the CallPilot setup diagram on page "[CallPilot setup](#)" (page 137).

1. A caller dials 6090 to access a menu service. This phantom DN forwards the call to CDN 6030, because the menu contains no fax or speech recognition capability.
2. Another caller dials 6095 to access the Fax Call Answering service. The call is forwarded to CDN 6050.
3. CallPilot looks up the DNs in the SDN table to determine which service is requested, the media type required, and the channel allocations for each service.
4. Call 1 (to the menu service that contains only voice functions) is routed to an ACD agent that is available to handle voice.
5. Call 2 (to the Fax Call Answering service) is routed to an ACD agent that is available to handle fax services.


Sample call flow in Meridian Mail

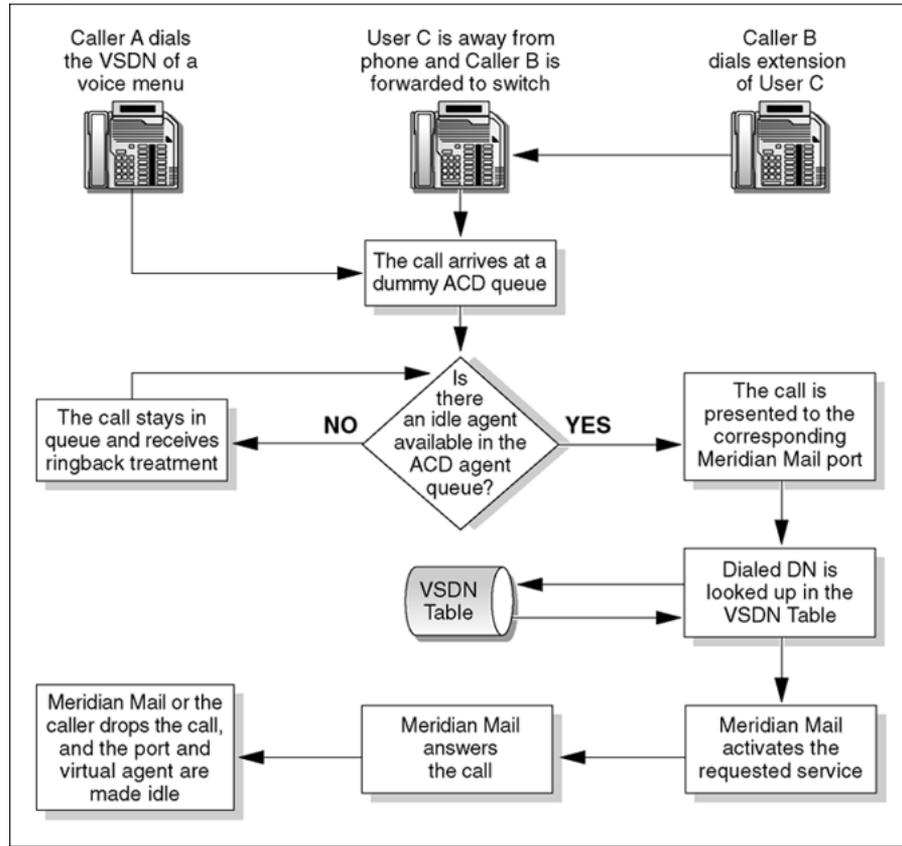

G101146

Meridian Mail setup

In this example, one ACD queue (3000) is configured:

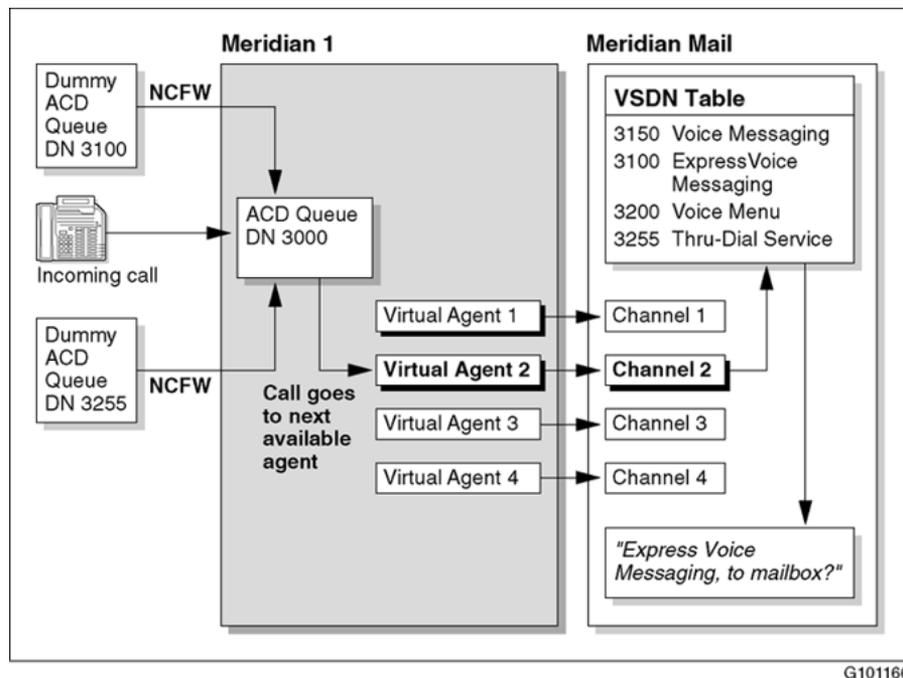

What happens when a caller dials a Meridian Mail service

Refer to the Meridian Mail diagram on page "[Sample call flow in Meridian Mail](#)" (page 139).

1. A caller dials 3100.
2. The call is forwarded to ACD queue 3000.
3. The call is directed to the first available ACD agent and is connected to a Meridian Mail channel (port).
4. Meridian Mail looks up the DN that was dialed (3100) in the VSDN Table to determine which service is associated with it. Meridian Mail then starts Express Voice Messaging, answers the call, and plays the appropriate prompts.

Comparing networking solutions

All networking solutions are automatically enabled on CallPilot if the networking feature was purchased.

The following table compares the networking solutions provided by Meridian Mail and CallPilot.

Networking solution	Site protocol name	Supported on Meridian Mail	Supported on CallPilot
Meridian networking (with modems)	Meridian	yes	no
Enterprise networking	Enterprise	yes	yes
AMIS networking (for both integrated and open AMIS sites)	AMIS	yes	yes
VPIM networking	VPIM	no	yes

Comparing Contact Center voice services

Introduction

The CallPilot migration utility supports the migration of Contact Center prompts from Meridian Mail to CallPilot. After migration, you can integrate CallPilot into the Contact Center environment. This section identifies the differences between Meridian Mail and CallPilot voice services in a Contact Center environment.

Comparison of CallPilot and Meridian Mail voice services

Feature	Meridian Mail	CallPilot
Call processing control	Meridian Mail uses the serial X.25 AML link.	CallPilot uses the TCP/IP and MLS protocols on the Nortel Server (NNS) Subnet.
Voice services control	Meridian Mail uses the serial ACCESS link.	CallPilot uses the TCP/IP and ACCESS protocols over the ELAN subnet.
Voice segment storage	Voice segments are stored in a mailbox. Access is controlled with a password.	Voice segments are stored in a folder. Access is controlled by Application Builder logon.
Voice segment length	Voice segments cannot exceed two minutes.	Voice segments cannot exceed ten minutes.

Feature	Meridian Mail	CallPilot
Managing voice prompts	You use the Voice Prompt Editor in the Contact Center administration client to administer and edit voice prompts.	You use CallPilot Application Builder to record and play voice prompts. To edit segment length, you must use a third-party application. Note: Application Builder is shipped with CallPilot; however, you must install it separately; refer to the <i>CallPilot Application Builder Guide</i> .
Voice segment update	The voice segment is updated for the next call in which the segment is played.	The voice segment is updated for the next time the segment prompt is played.
Voice segment deletion	When a segment is deleted, the IDs of all subsequent segments are renumbered consecutively.	Segment IDs do not change when segments are deleted.
Voice prompt migration	Not applicable	When you migrate voice segments from Meridian Mail to CallPilot, the segment name is preserved. The title is concatenated to the segment script (for example, <title>script). Note: A duplicated file name is flagged if prompts are migrated from different mailboxes on Meridian Mail.
Front-end IVR robustness	Meridian Mail ACD DN night call forward (NCFW) to the Contact Center CDN.	CallPilot default ACD DN NCFW to Contact Center CDN.
Maximum capacity	Meridian Mail supports 96 ports.	CallPilot supports 96 ports.

Comparing Meridian Mail and CallPilot terminology

Overview

The following table compares the Meridian Mail and CallPilot feature names.

Meridian Mail feature name	CallPilot feature name
Interface	
Meridian Mail Voice Messaging	CallPilot Voice Messaging
Fax Messaging	CallPilot Multimedia Messaging
Fax Call Answering	
Meridian Mail User Interface (MMUIF)	Multimedia messaging user interface (MMUI)
not applicable	Speech Activated User Interface
Service name	
Meridian Mail Call Answering	Call Answering
Meridian Mail Express Messaging	Express Voice Messaging
not applicable	Fax Call Answering
not applicable	Express Fax Messaging
not applicable	Speech Activated Messaging
Symposium Messenger	Desktop Messaging
Meridian Mail Outcalling	Outcalling
Meridian Mail Voice Services Administration	Application Builder
Meridian Mail Voice Forms	Not applicable
Meridian Mail Voice Forms Transcription Service	Not applicable
Maintenance services	
Fax Item Maintenance	Fax Item Maintenance
Voice Prompt Maintenance	Voice Item Maintenance
Remote Activation	Not applicable
Networking and network services	
AMIS Networking	AMIS Networking
AMIS Virtual Node Networking	Integrated AMIS Networking
Enterprise Networking	Enterprise Networking
Meridian Mail Net Gateway	VPIM Networking
NMS Networking	NMS Networking
Remote User Propagation or Names Across the Network	Names Across the Network
Outcalling services	

Meridian Mail feature name	CallPilot feature name
Meridian Mail Remote Notification	Remote Notification
Delivery to Non User (DNU)	Delivery to Telephone
Fax Call Back	Delivery to Fax
Desktop messaging clients	
Nortel Messenger Client	Not applicable
Not applicable	Desktop Messaging for Microsoft Exchange
Not applicable	Desktop Messaging for Microsoft Outlook
Not applicable	Desktop Messaging for Lotus Notes
Not applicable	Desktop Messaging for GroupWise
Mailbox management	
Class of Service (COS)	Mailbox Class
Personal Distribution List	Personal Distribution List
System management	
MMI	CallPilot Manager
Meridian Mail Reporter	Reporter
Hacker Monitor	Hacker Monitor
AutoAdmin	AutoAdd
Restriction/Permission List	Restriction/Permission List
System Distribution List (SDL)	Shared Distribution List (SDL)
SEER Reports/Codes	Alarms & Events
Meridian Mail Multi-Customer	Multi-Tenant
Multi-Customer	Not applicable
Local Voice User	Local User
Remote User	Remote User
Directory Entry User	Local Directory Entry
Application Builder blocks	
Meridian Mail Voice Menu	Menu
Meridian Mail Announcement	Announcement
Meridian Mail Thru-Dial Service	Thru-Dial
Meridian Mail Time-of-Day Controller	<ul style="list-style-type: none"> • Time Control • Day Control • Date Control

Meridian Mail feature name	CallPilot feature name
Meridian Mail Fax on Demand	<ul style="list-style-type: none">• Fax Select• Fax Send
performed by voice menu	Password Check
performed by voice menu	Call Transfer
performed by voice menu	Rotary Dial
performed by voice menu	Language Select
not applicable	Imported Application
not applicable	Attendant Block

Appendix B

CallPilot migration command reference

In this appendix

"Using the CallPilot migration utility" (page 147)

Using the CallPilot migration utility

Introduction

This section describes how to use the commands available in the CallPilot migration utility.

To determine what commands are available

To view the list of available commands in the CallPilot migration utility, at the CLI prompt, type `help`, and then press Enter.

Result: The following information appears:

Commands available:

```
*CLI      Debug      DeleteStagingFiles  KillTape
ListMap   Migrate   *MMail2CallPilotMigrReadTapeLabel
Summary   TapeTransfer
```

For more help type "HELP <command>" or "HELP all".

Note: The following commands are reserved for Nortel use only:

- ListMap
- Debug

This command generates more output to the console window. It also generates a migrationtrace.txt file, which contains the input data.

Use KillTape only if the tape drive hangs while the tape is being accessed. For example, if the ReadTape command fails, you can use the KillTape command to cancel it.

To execute a command

You can execute a command by typing the entire command, or by typing just enough characters to allow the system to recognize it.

For example, to copy files from the tape to the migration files folder on the CallPilot server, type `tape`, and then press Enter.

To read the label on the tape

To verify that the correct tape is being used, type `read`, and then press Enter.

Result:Information similar to the following appears:

```
UserTapeLabel: MM Tech Trial Data Oct.24
SystemTapeLabel: Date=10/24/2001 Time=19:22:25
CI>
```

To transfer files from tape to the CallPilot system (stage files)

To copy files from a data tape into the migration files folder on CallPilot (the staging area), type `tape`, and then press Enter.

Note: You cannot transfer files to the CallPilot server from a message tape.

Result:The utility processes the request and displays the following information:

```
Please insert the MMail data tape in the drive
and press Enter key ->
** Wednesday, November 28, 2001 [03:22:15 PM] **
Cleaning up the MigrationFiles directory ...
Total of [0] files deleted from the staging directory
[D:\Nortel\MPCX\Migration\MigrationFiles]
** Wednesday, November 28, 2001 [03:22:15 PM] **
Transferring the tape files to Windows NT format.
Please wait ...
    UserTapeLabel: MM Tech Trial Data Oct.24
    SystemTapeLabel: Date=10/24/2001 Time=19:22:25
CI>
```

To delete the staging files**Step Action**

- | Step | Action |
|------|--|
| 1 | When the migration is confirmed as successful, delete the files from the CallPilot server. |

Type `delete`, and then press Enter.

Result:The following prompt appears:

```
Are you sure you want to delete the staging files at
this time? (y/n):
```

2 Type **y**, and then press Enter.

Result:The following information appears:

```
Total of [450] files deleted from the staging
directory [D:\Nortel\MPCX\Migration\MigrationFiles]
CI>
```

—End—

To display a summary of the migration process

After the migration has been confirmed as successful, review a summary of the migration results.

Type **sum**, and then press Enter.

Result:Information similar to the following appears:

```
** Wednesday, November 28, 2001 [03:28:53 PM] **
*****| Summary of Data Migration |*****
System and Customer Profile Data Migration: -----
-----
System Record: <Update not required>
Customer Record: <Update not required>
Tenant Record: <Update not required>
Messaging Parameters: <Update not required>
Security Parameters: <Update not required>
-----
Restriction and Permissions Lists:
-----
Total Number of RPLs attempted: <0>
Total Number of RPLs created/updated successfully: <0>
Total Number of RPLs in Error: <0>
-----
Network Database:
-----
Total Number of Servers attempted: <0>
Total Number of Servers created/updated successfully:
<0>
Total Number of Server updates in Error: <0>
Total Number of Locations attempted: <0>
Total Number of Locations created/updated
successfully: <0>
Total Number of Location updates in Error: <0>
Total Number of Location Codes attempted: <0>
Total Number of Location Codes created/updated
successfully: <0>
Total Number of Locations Code updates in Error: <0>
Total Server Connection Lists attempted: <0>
Total Server Connection Lists created/updated
```

```
successfully: <0>
Total Server Connection List updates in Error: <0>
Customers General Delivery Parameters: <Update not
required>
Customers AMIS Delivery Parameters: <Update not
required>
Customers Enterprise Networking Parameters: <Update not
required>
Customers Fax Delivery Parameters: <Update not
required>
Customers DTT Delivery Parameters: <Update not required>
Customers DTT/DTF Prefixes: <Update not
required>
Customers Default Dialing Parameters: <Update not
required>
-----
Class of Services:
-----
Total Number of COSSs attempted: <0>
Total Number of COSSs created/updated successfully: <0>
Total Number of COSSs in Error: <0>
-----
User Profile:
-----
Total Number of Local Users attempted: <0>
Total Number of Local Users created/updated
successfully: <0>
Total Number of Local Users in Error: <0>
Total Number of Spoken name verifications data
attempted: <0>
Total Number of Spoken name verifications data
created/updated successfully: <0>
Total Number of Spoken name verifications data in
Error: <0>
Total Number of User Greetings data attempted: <0>
Total Number of User Greetings data created/updated
successfully: <0>
Total Number of User Greetings data in Error: <0>
Total Number of Remote Users attempted: <0>
Total Number of Remote Users created/updated
successfully: <0>
Total Number of Remote Users in Error: <0>
Total Number of Directory Entry Users attempted: <0>
Total Number of Directory Entry Users created/updated
successfully: <0>
Total Number of Directory Entry Users in Error: <0>
-----
System Distribution Lists:
-----
Total Number of SDLs attempted: <0>
```

```
Total Number of SDLs created/updated successfully: <0>
Total Number of SDLs in Error: <0>
-----
Personal Distribution Lists:
-----
Total Number of User PDL updates attempted: <0>
Total Number of PDLs created/updated
successfully: <0> Total Number of PDLs in Error: <0>
-----
Menu, Announcements, Fax Items:
-----
Total Number of Services attempted: <0>
Total Number of Services created/updated
successfully: <0>
Total Number of Services in Error: <0>
-----
Other Errors encountered during the migration: <0>
*****| End of Summary |*****
Please check the log file (MigTransaction.log) for details.
CI>
```

Index

Symbols/Numerics

201i server, network setup 129
59, 59

A

ACD agents 133
Alarm Monitor 88
announcements 22
 collecting for migration 43
 migrating from Meridian Mail Voice
 Services 76
Application Builder 59
 services, selective migration to
 CallPilot 62
 using for application completion and
 publication 76
area codes 21, 88

B

backup schedules 21, 88
blank tape requirements 34
broadcast messages
 in Meridian Mail and CallPilot
 network 104
 support, verifying 92

C

call queuing, Meridian Mail and CallPilot
 comparison 126
call routing
 in CallPilot, description 137, 138
 in Meridian Mail, description 139,
 140

 Meridian Mail and CallPilot
 comparison 126, 126, 127, 136
CallPilot
 configuration, verifying after
 migration 85
 integration with Contact Center 87
 migration errors 124
 server name, verifying after
 migration 91
CallPilot documentation
 system setup 127
CallPilot networking with Meridian Mail
 broadcast messages 104
 limitations 103
CallPilot system setup 127
 201i server 129, 129
 rackmount server 128, 128
 required documentation 127
 samples 127
 tower server 128, 128
CallPilot, comparison with Meridian
 Mail 126
Card Option 20
CDN queue, configuration 131
CDP dialing plan, verifying after
 migration 90, 92
channel allocation table 21
channels
 DS0 133
 Meridian Mail and CallPilot
 comparison 126
 multimedia 134
checklists
 CallPilot migration 59

- Meridian Mail preparation 31
 - Meridian Mail to CallPilot migration 13
 - Classes of Service (COS) 21, 21, 59
 - and restriction/permission lists (RPLs) 87
 - collecting for migration 43, 44
 - personal 21
 - verifying after migration 87
 - Compact Option 20
 - connection DNs, verifying after migration 91
 - Contact Center
 - and CallPilot integration 133
 - and CallPilot integration, actions required 87
 - Contact Center prompts
 - file names 16, 33
 - migrating to CallPilot 62
 - segment titles 17
 - Controlled Directory Number, configuration 131
 - customer profiles 21
 - collecting for migration 43
- D**
- data collection, Meridian Mail
 - by COS, performing 29
 - by department, performing 28
 - by mailbox range, performing 29
 - data migration tape, creating 46
 - error messages 115, 116
 - fax items 23
 - large system 27, 27, 31
 - log, reviewing 53
 - methods 14
 - multicustomer systems 24
 - networking data 24
 - preparation checklist 31
 - preparation tape 34
 - preparing the system for 36
 - selective data collection, description 24
 - small system 26
 - system sizes 23
 - tape requirements 34
 - utility, starting 39
 - voice segments 23
 - wild cards, using 45
 - data tape, creating 46
 - delivery parameters 21
 - Delivery to Fax (DTF) 21
 - Delivery to Telephone (DTT) 21
 - departments, collecting for migration 44
 - dialing plans, verifying after migration 90, 92
 - dialing translations defaults, collecting for migration 43
 - directory entry users 22
 - DMS-100 130
 - DNs 33
 - and system distribution lists (SDLs) 87
 - DS0 channels 133
- E**
- enhanced card option 20
 - Enterprise Networking
 - Names across the Network] 103
 - passwords, verifying after migration 91, 91
 - error messages
 - Meridian Mail data collection 116, 116
 - errors
 - potential causes of 107
 - resolving 87, 108
 - ESN dialing plan, verifying after migration 90, 92
 - exchange codes 21, 88
- F**
- fax capability 87
 - fax item data
 - collecting for migration 43
 - fax items
 - collecting 43
 - migrating from Meridian Mail Voice Services 77
 - fax segments 22
 - features, Meridian Mail and CallPilot comparison 143
 - format

migrated announcements 77
migrated menus 77

G

GENERAL error messages 000 - 099 116

H

Hacker Monitor 88
hardware information 21
hardware requirements 34, 35, 55, 85
 IPE server 56
Hospitality 21

I

inbound SDNs 132
IPE server, network setup 129, 129

L

large system migration 27, 27, 31
limitations
 Contact Center prompt migration 16
 conversion during migration 76
 migration rerun 75
 system 16
local voice users 21

M

mailbox
 configuration, verifying after migration 86
 distribution across volumes 87
 numbers 21
 numbers, length 86
 properties 21
 users 86
mailboxes
 collecting by mailbox number 44
MAPFILE error messages 100-199 117
menus
 migrating from Meridian Mail Voice Services 76
Meridian 1
 and CallPilot IPE server setup 129
 and CallPilot rackmount server setup 128

and CallPilot tower server setup 128
connectivity, Meridian Mail and CallPilot comparison 126

Meridian Mail

comparison with CallPilot 126
data collection
 errors 116, 116
 log, reviewing 53
 preparing for 36
 utility, starting 39
data migration tape, creating 46
fax items 23
migration preparation checklist 31
selective data collection, description 24
system sizes 23
to CallPilot migration checklist 13
voice segments 23

Meridian Mail networking with CallPilot
broadcast messages 104
limitations 103

Meridian Mail Voice Services
migrating announcements 76
migrating fax items 77
migrating menus 76

message data
 description 12
message migration, performing
 CallPilot 62
message transmission support, verifying after migration 91

messaging
 settings 21
 system setup, Meridian Mail comparison with CallPilot 126

migrated announcements
 format 77
 from Meridian Mail Voice Services 76

migrated fax items
 from Meridian Mail Voice Services 77

migrated menus
 format 77
 from Meridian Mail Voice Services 76

migration
 CallPilot migration checklist 59
 checklist 13
 conversion issues 76

- data tape, creating 46
 - error messages 124
 - estimating time required 25
 - fax items 23
 - performing for fax items 61
 - performing for voice segments 61
 - prompt limitations 16
 - rerun limitations 75
 - rerunning to fix errors 87
 - reversing 108
 - system limitations 16
 - system sizes 23
 - transaction log 86
 - voice segments 23
 - voice services post migration activities 113
 - migration errors
 - correcting 108
 - potential causes 107
 - migration from message tape, description 65
 - migration progress results
 - displaying 149
 - migration staging files, copying
 - to CallPilot 57
 - to CallPilot 2.0 148
 - migration staging files, deleting
 - from CallPilot 58
 - from CallPilot 2.0 148
 - migration tape label, reading (CallPilot 2.0) 148
 - migration transaction log
 - location 65, 69
 - migration utility commands (CallPilot 2.0)
 - completion results, displaying 149
 - executing 148
 - listing 147
 - staging files, copying 148
 - staging files, deleting 148
 - tape label, reading 148
 - migration utility, location
 - CallPilot 61
 - migration, halting
 - CallPilot 58
 - migration, performing
 - CallPilot 61
 - migration, rerunning halted
 - CallPilot 58, 58
 - Modular GP 20
 - Modular Option 20
 - Modular Option EC 20
 - MPUs 133
 - requirements 134
 - MSM 16, 20, 25
 - multicustomer data collection 24
 - multicustomer support 21
 - Meridian Mail and CallPilot comparison 126
 - multimedia channels 134
 - requirements 134
 - types 134
 - Multimedia Messaging CDN
 - configuration 131
 - multimedia processing units 133
 - requirements 134
- ## N
- Names across the Network 103
 - network database, verifying after migration 88
 - actions required 88
 - broadcast message support 92
 - CallPilot server name 91
 - changes, making 89
 - connection DNs 91
 - Enterprise Networking passwords 91, 91
 - ESN dialing plan 92
 - message transmission support 91
 - network scheduling parameters 89
 - post-migration values 90
 - protocols 89, 89
 - remote user support 91
 - server type 91
 - site ID 91
 - site protocols 91
 - sites 89, 89
 - switch locations 89, 89
 - text data support 92
 - VPIM network shortcuts 92
 - network delivery profiles, collecting for migration 43
 - network dialing defaults 21
 - network locations 88

- collecting for migration 43
- network protocols
 - verifying after migration 91
- network scheduling parameters, verifying
 - after migration 89
- network setup, CallPilot
 - 201i server 129
 - IPE server 129, 129
 - rackmount server 128, 128
 - tower server 128, 128
- network sites 88
 - collecting for migration 43
- networking data 21
 - collecting for migration 24, 43
- networking Meridian Mail and CallPilot
 - broadcast messages 104
 - limitations 103
- networking sites 21, 33
- networking solutions, Meridian Mail and CallPilot comparison 140
- non-delivery notifications 22

O

- Option EC 11 20
- outbound SDNs 132
- outdialing defaults, collecting for migration 43

P

- personal distribution lists (PDLs) 21, 25, 86
 - and remote users 90
 - collecting 43
 - collecting for migration 43
 - selective migration to CallPilot 62
 - verifying after migration 86
- personal greetings 21
- personal verification recording 22
- phantom DNS
 - configuration 131
 - services that require 131
- ports, Meridian Mail and CallPilot
 - comparison 126
- preparation tape 34
- prompts, Contact Center
 - file names 16
 - limitations 16

- migrating to CallPilot 62
- segment titles 17

R

- rackmount server, network setup 128, 128
- remote notification 87
 - schedules 21, 88
- remote user
 - entries, verifying after migration 90
 - support, verifying 91
- remote voice users 22
- restriction/permission lists (RPLs) 21
 - and Classes of Service (COS) 87
 - collecting for migration 43
 - verifying after migration 87

S

- SDN table
 - configuration 132
 - purpose 132
 - types of SDNs 132
- security profiles, collecting for migration 43
- SEERs 21, 31
- selective data collection
 - description 24
- server configuration 130
 - Meridian Mail and CallPilot comparison 136
 - MPUs 133
 - multimedia channels 134
 - SDN table 132
- server type, verifying 91
- Service Directory Number table
 - configuration 132
 - purpose 132
 - types of SDNs 132
- service directory numbers (SDNs) 88
- services and phantom DNS 131
- site ID, verifying 91
- site protocols, verifying 91
- SL-100 130
- small system migration 26
- SMDI link information 21
- soft keys 38
- staging files, copying
 - to CallPilot 57

- to CallPilot 2.0 148
- staging files, deleting
 - from CallPilot 58
 - from CallPilot 2.0 148
- Succession Communication Server for Enterprise 1000
 - and CallPilot IPE server setup 129
 - and CallPilot rackmount server setup 128
 - and CallPilot tower server setup 128
- switch configuration 130
 - ACD agents 133
 - CDN queue 131
 - Meridian Mail and CallPilot comparison 136
 - phantom DNs 131
- switch locations 21
- system data
 - collecting for migration 43
 - description 12
- system distribution lists (SDLs) 22, 22, 25, 32
 - and invalid DNs 87
 - and remote users 90
 - collecting 43
 - collecting for migration 43
 - selective migration to CallPilot 62
 - verifying after migration 87
- system greetings 21
- system limitations 16
- system messages 22
- system name 21
- system profiles 21
 - collecting for migration 43
 - selective migration to CallPilot 62

T

- T1/E1 link information 21
- tape media requirements 34, 35
 - IPE server 56
- terminal numbers (TNs) 133
- text data support, verifying 92
- Thru-Dial services 13, 22
- time estimates 25
- tower server, network setup 128, 128
- transaction log 86

- location 65, 69
- translation tables 21, 88
- troubleshooting
 - reasons for errors 107

U

- user data, collecting for migration 43
- user mailboxes 32
 - collecting for migration 43
- user properties 21
- user voice messages 21
- USERMOD error messages 400-499 120
- users
 - selective migration to CallPilot 62

V

- voice forms 21
- voice menu structure 21
- voice menus, collecting for migration 43
- voice messages 22
- Voice Messaging CDN configuration 131
- voice segments
 - collecting for migration 43
- voice service information 21
- voice services
 - announcements 22
 - collecting for migration 43
 - fax segments 22
 - menu segments 22
 - menu structure 22
 - migrating Symposium Voice Services only 49
 - performing the migration 49
 - post migration activities 113
 - using Application Builder 76
- voice services, Meridian Mail and CallPilot comparison 141
 - call processing 141
 - control 141
 - IVR robustness 142
 - maximum capacity 142
 - prompt management 142
 - prompt migration 142
 - segment deletion 142
 - segment length 141
 - segment update 142

voice segment storage 141
volumes, collecting for migration 44
VPIM Networking
Names across the Network 103
shortcuts, verifying 92

VSDN Table 21

W

wild cards, using for data collection 45

Nortel CallPilot

Meridian Mail to CallPilot Migration Utility Guide

Copyright © 2007, Nortel Networks
All Rights Reserved.

Publication: NN44200-502
Document status: Standard
Document version: 01.02
Document date: 17 April 2007

To provide feedback or to report a problem in this document, go to <http://www.nortel.com/documentfeedback>

Sourced in Canada

The information in this document is subject to change without notice. The statements, configurations, technical data, and recommendations in this document are believed to be accurate and reliable, but are presented without express or implied warranty. Users must take full responsibility for their applications of any products specified in this document. The information in this document is proprietary to Nortel Networks.

*Nortel, the Nortel logo, and the Globemark are trademarks of Nortel Networks.

*Microsoft, MS, MS-DOS, Windows, and Windows NT are registered trademarks of Microsoft Corporation.

All other trademarks and registered trademarks are the property of their respective owners.

