



# AARP RealPad MA7BX2 Back Cover Replacement

This guide will show you how to remove the back cover, tape, and the black audio cover of the AARP RealPad MA7BX2.

Written By: Alana Escue



This document was generated on 2019-09-21 05:54:37 AM (MST).


## INTRODUCTION

This guide will show you in detail how to remove the AARP RealPad. In order to remove the back cover you will need to know how to use a screwdriver and a suction cup.

### TOOLS:


- [Suction Handle \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [JIS #000 Screwdriver \(1\)](#)

## Step 1 — Back Cover

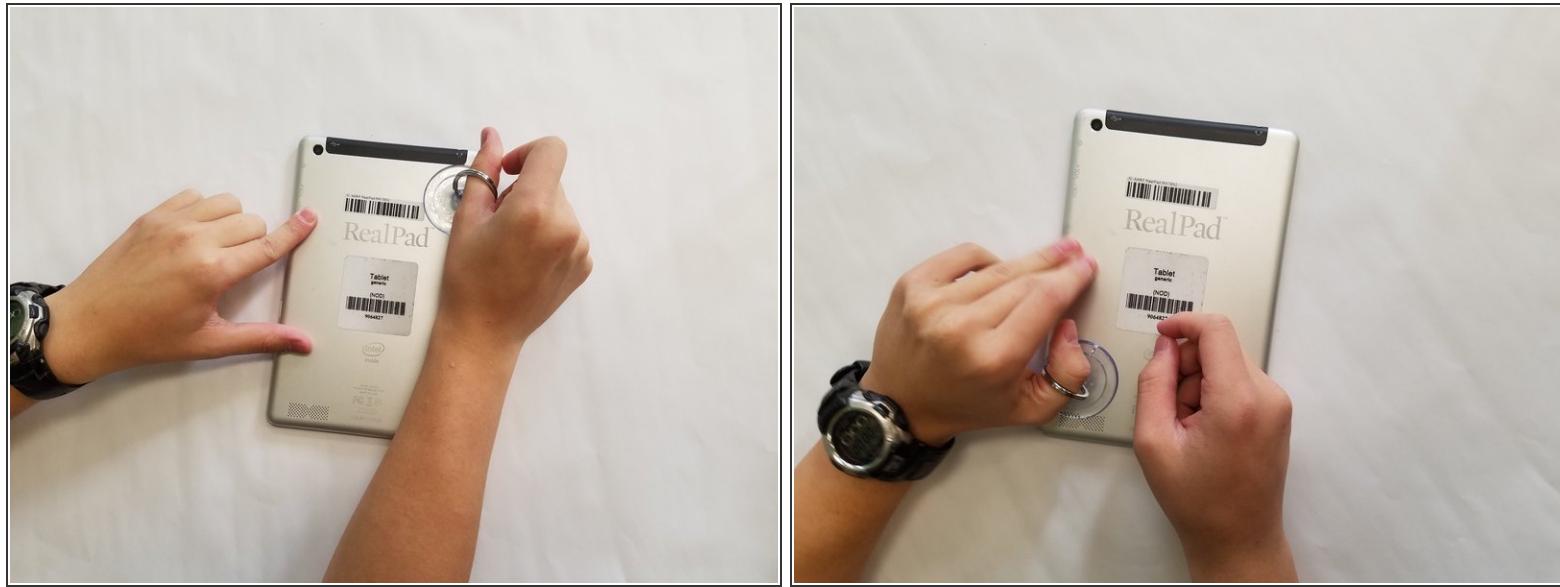

- Loosen the back cover using the suction cup.
- Pull up on the center of the back with the suction cup.
- Pull up on all four corners of the back with the suction cup.


## Step 2

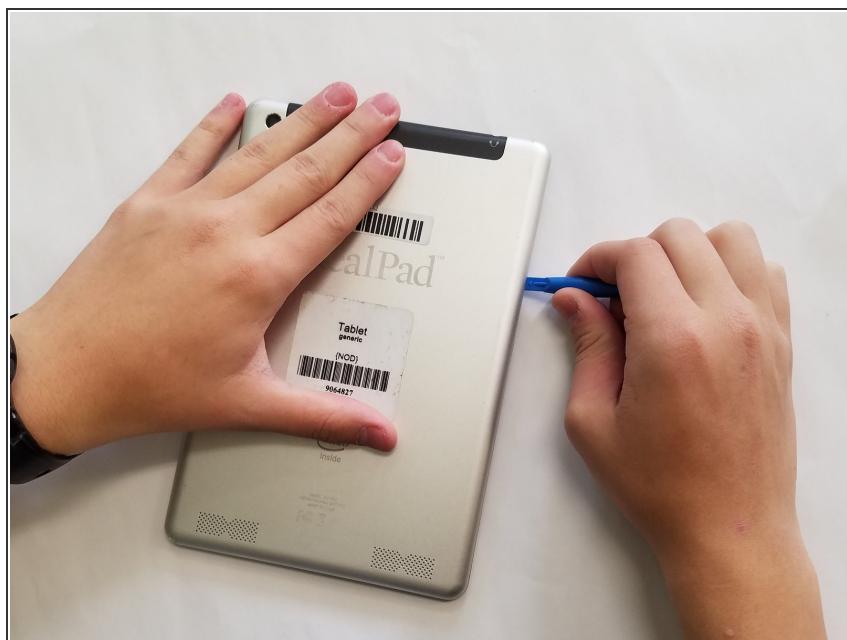

- Remove the back cover by gently placing the small opening tool in the crevice created by loosening the back.
- Slide the opening tool around the edges of the device.
- Wedge it open using the opening tool.

● Use the suction cup again if you're having trouble removing the back cover.


## Step 3

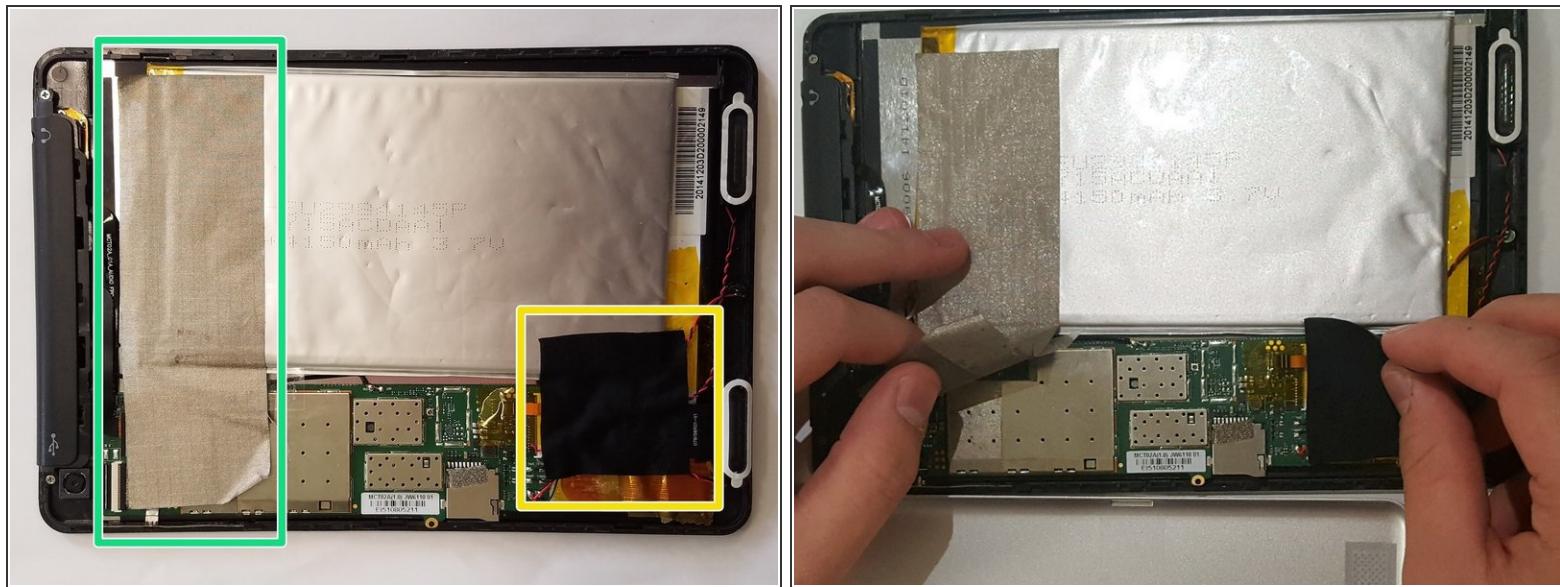

⚠ The black tape is stuck to delicate wires; remove with caution.


- Peel off the silver tape.
- Gently pull off the black tape.

## Step 4

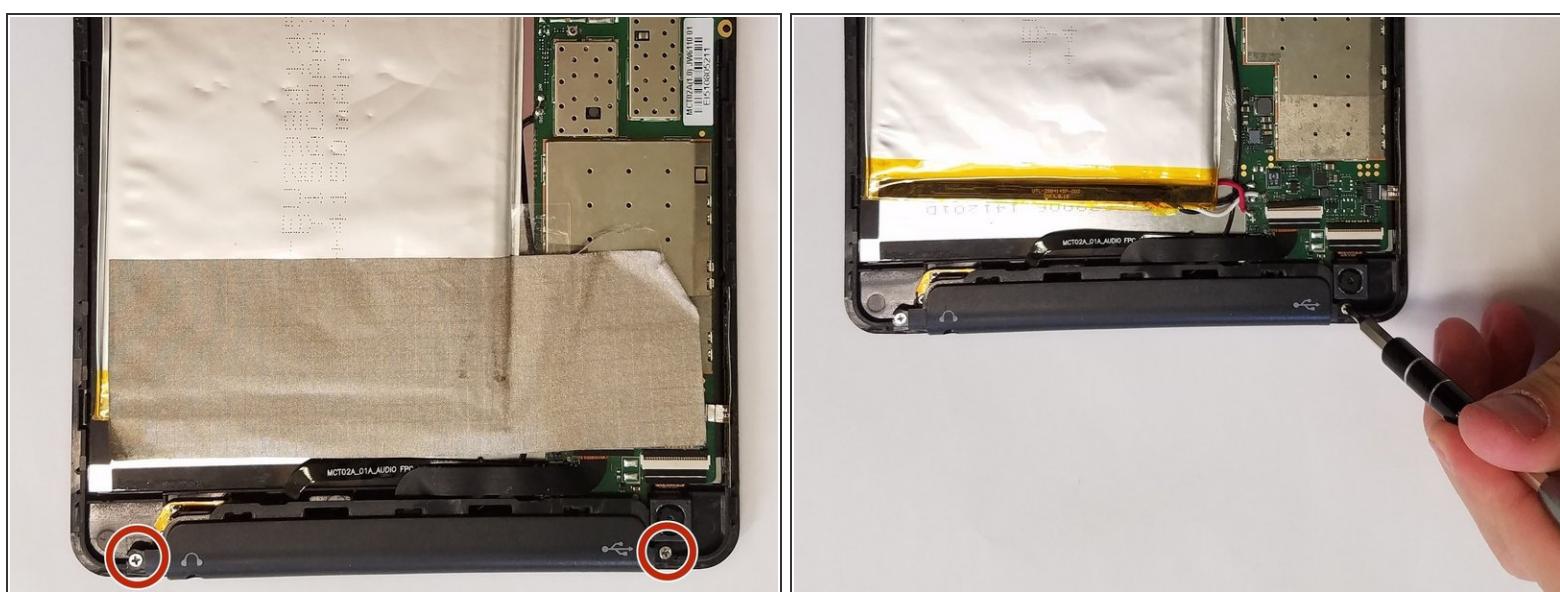

- Using the JIS #000 screwdriver, remove the two 2.5mm screws.

## Step 5

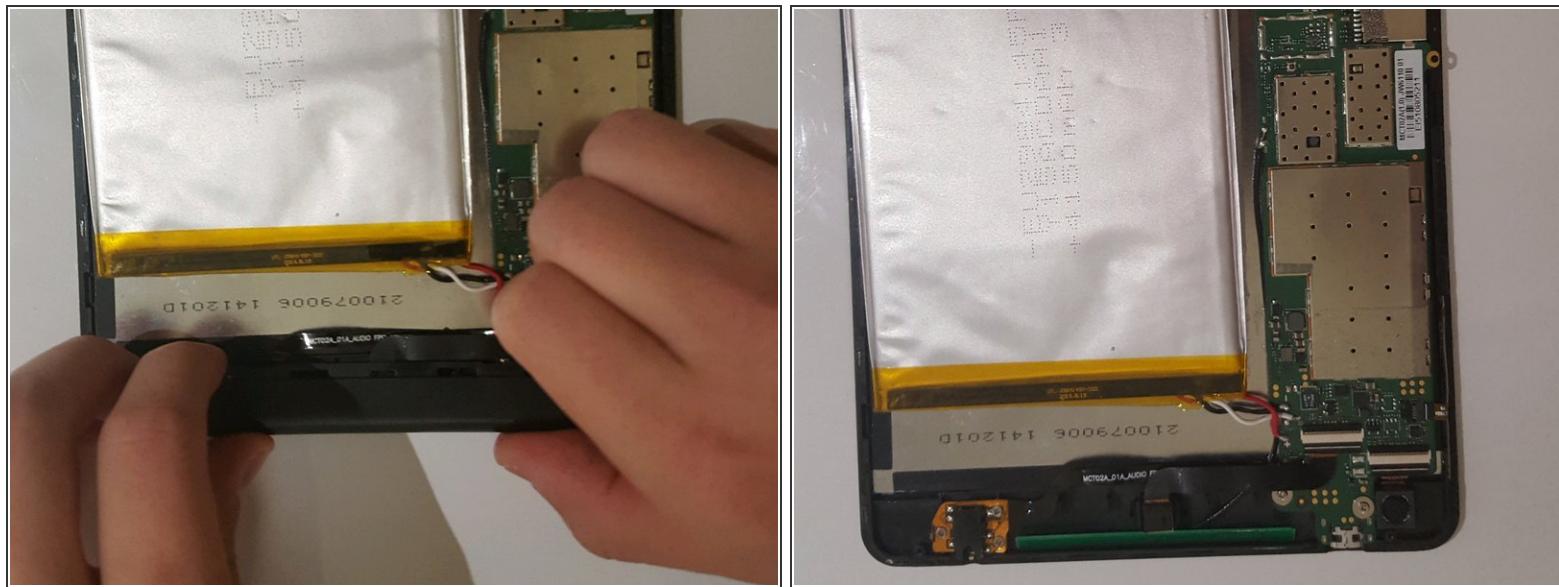

- Lift off the black audio cover.

To reassemble your device, follow these instructions in reverse order.