




Asus Transformer T100 Button Module Replacement

Replace the button module inside the device.

Written By: Taylor Pantiga

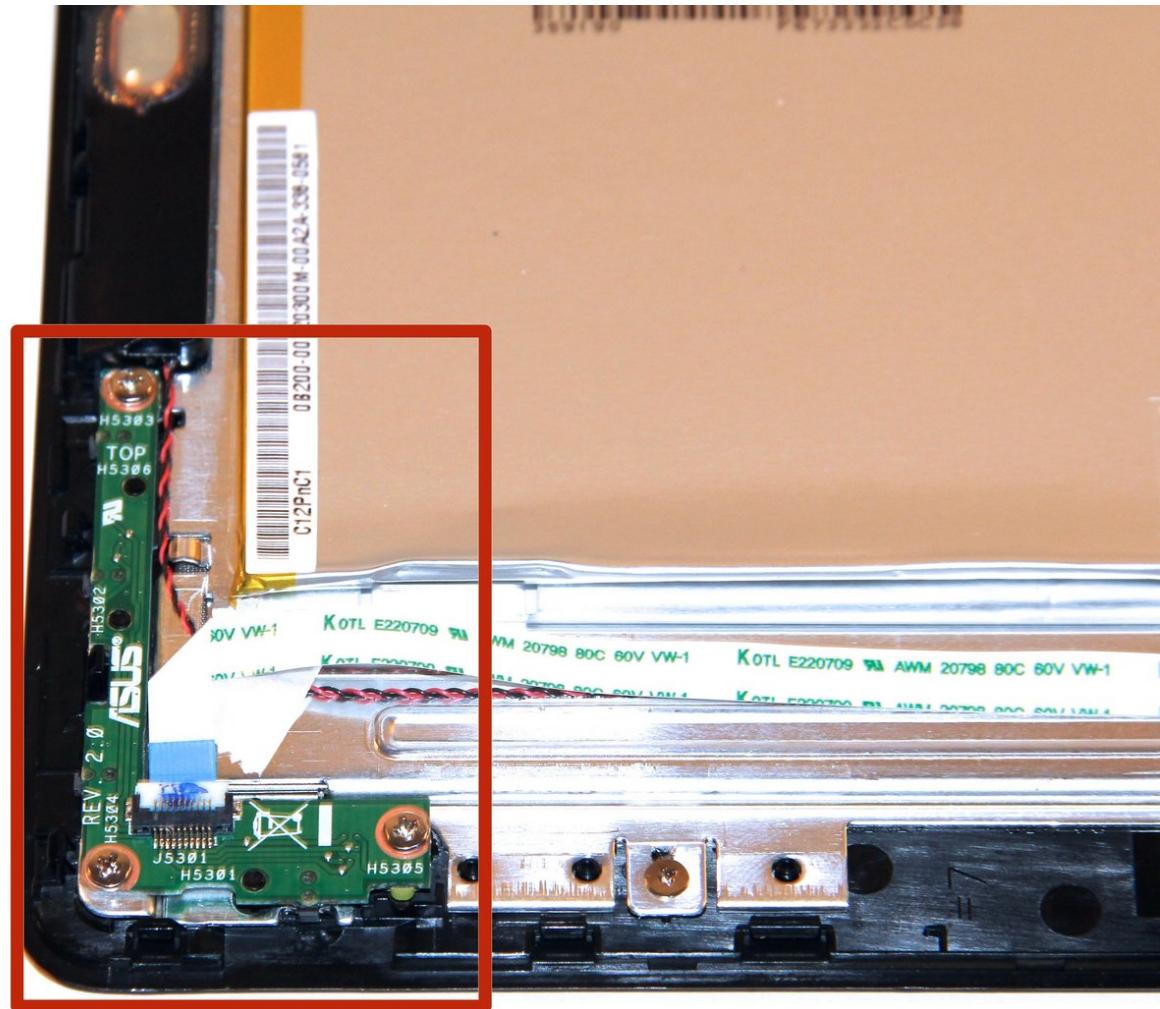

INTRODUCTION

All the buttons on the tablet are located in one corner. They are all controlled by a button module board, which can be removed if desired.

TOOLS:


- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Rear Cover



- Separate the tablet from the base by pressing the large silver button below the tablet. The silver button is located at the base of the tablet.
- Remove the tablet by lifting up.

Step 2

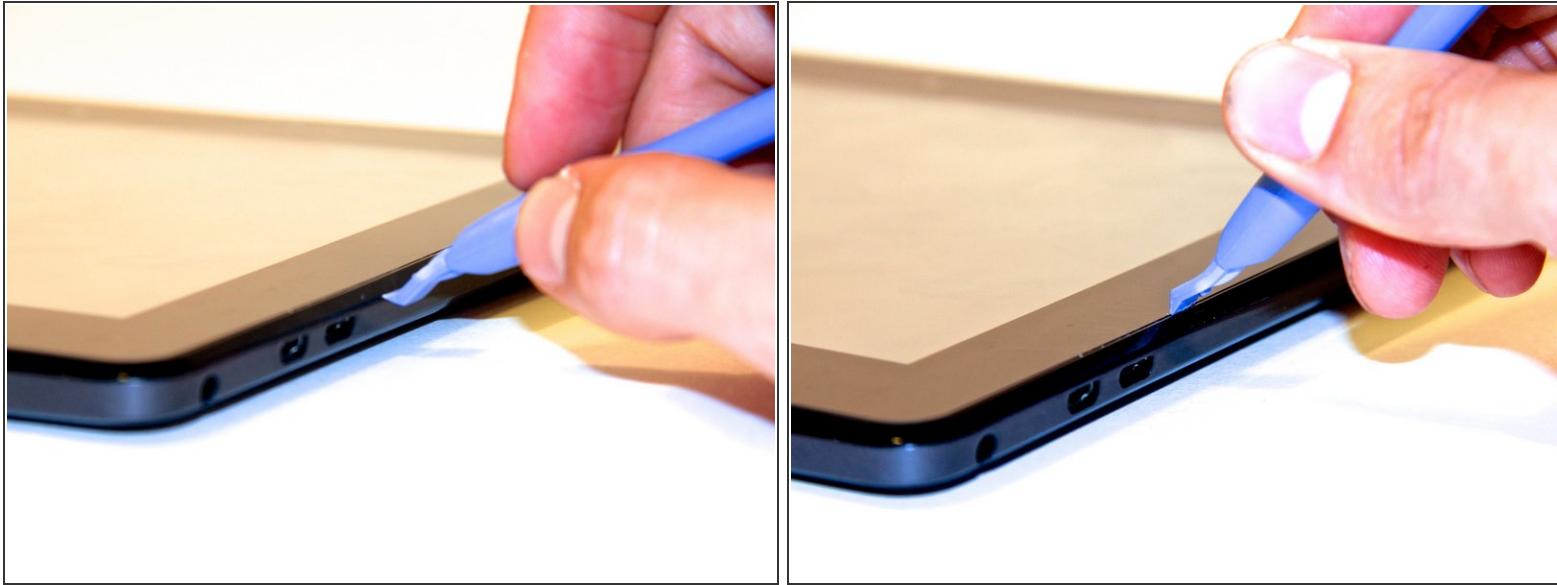

- Insert the opening tool into the seam of the tablet casing and gently pry upwards.
- With a little force, you will feel the clips release.


Step 3



- Slide the tool along all four edges of the tablet, making sure that all the clips are released.


 Do not break these clips; otherwise, the screen will become less secure.

Step 4

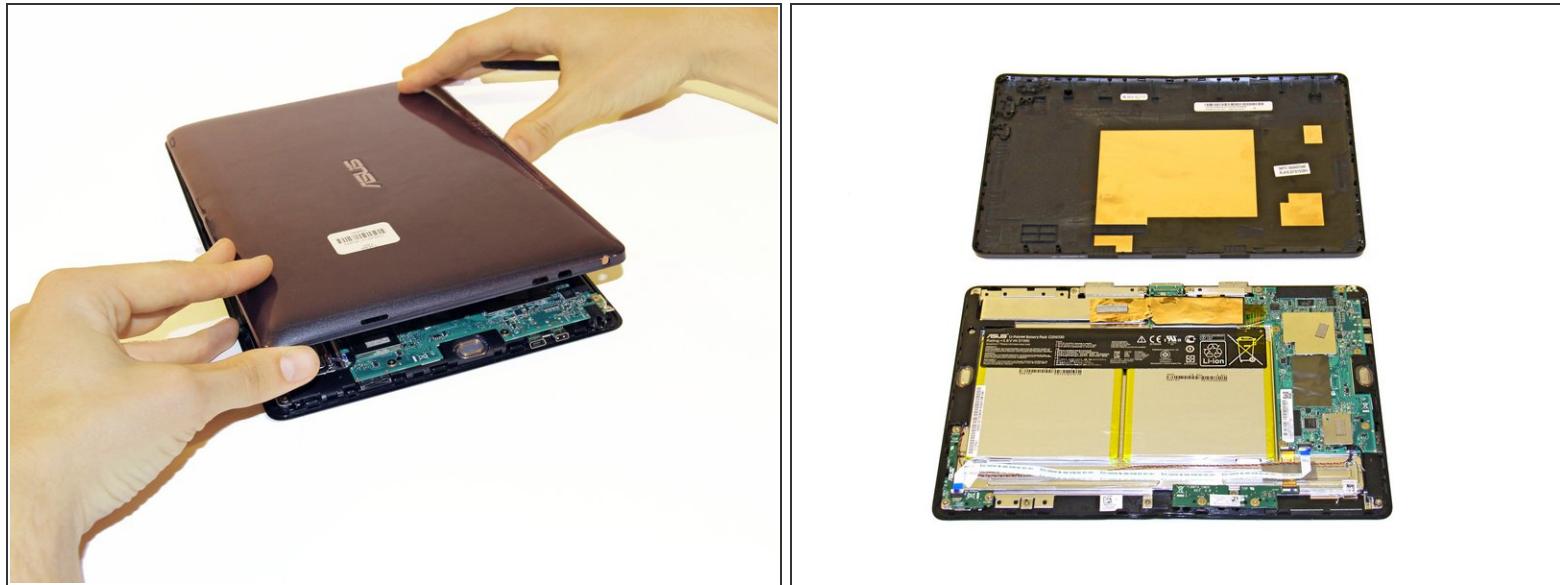


- Remove the rear casing.

Step 5 — Button Module

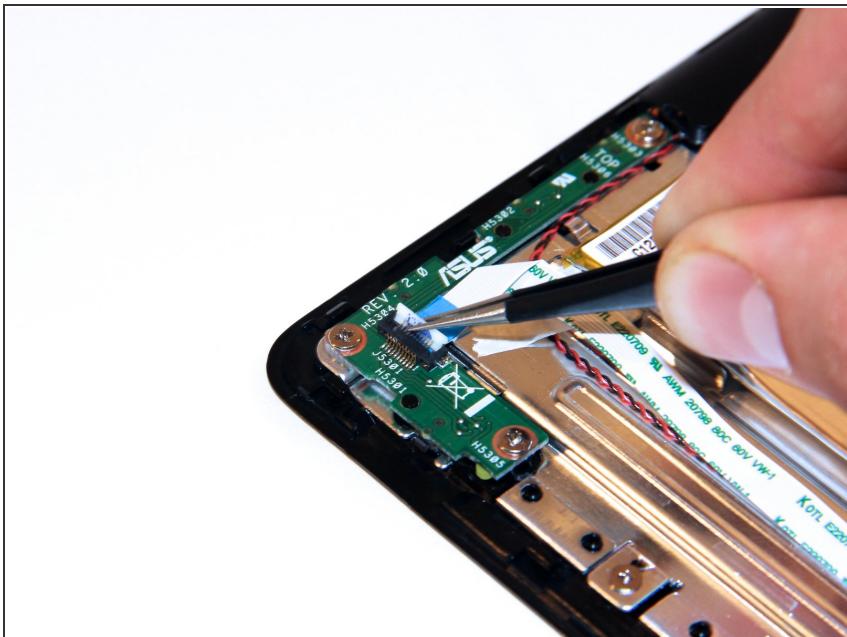


- Unclip the white connection clip using a pair of tweezers.

Step 6

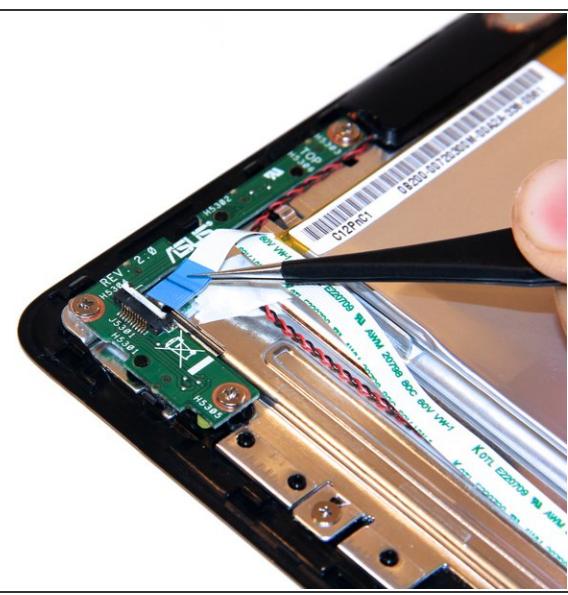


- Pull the connection apparatus from the connection clip on the board using a pair of tweezers.

Step 7

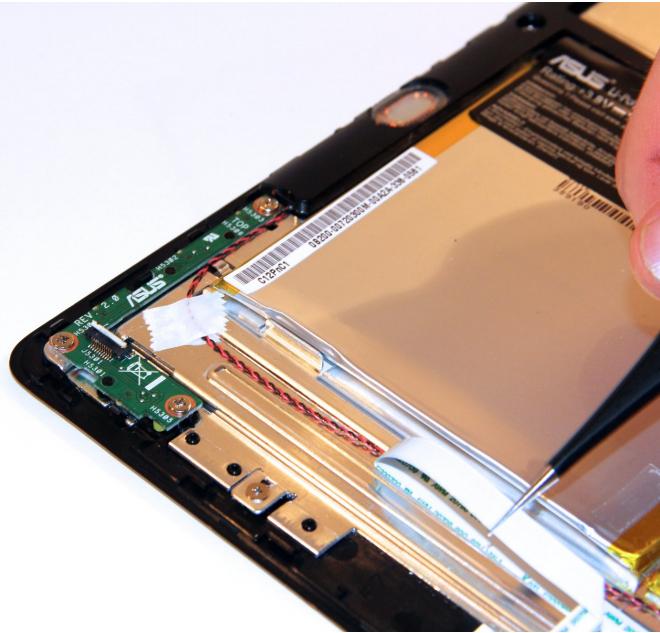

- Gently fold the connection apparatus back away from your work area.

Step 8

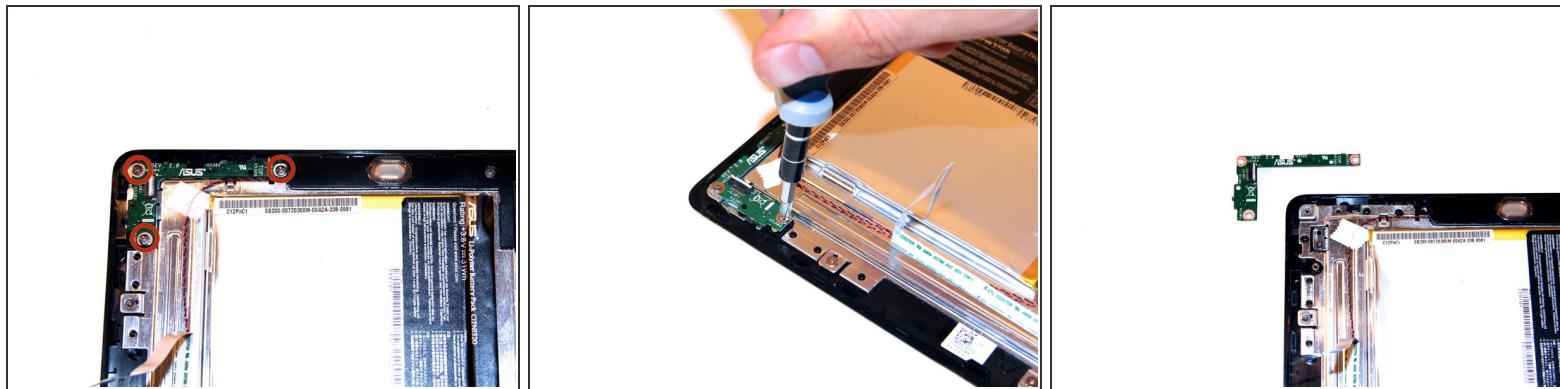

- Remove the screws using a Phillips Head #1 screwdriver.
- Remove the power button module.

To reassemble your device, follow these instructions in reverse order.