



Automatic Coffee Machine Cecotec Power Matic-Ccino 7000 or Rooma RM-A7 Disassembly

To get inside the machine and make some repair in the main components.

Written By: Egas




INTRODUCTION

When needing to get inside the machine, it has little things you should know to not make a crap like i did a little in the first time disassembled this machine and an automatic coffee machine for the first time.

TOOLS:

- [64 Bit Driver Kit \(1\)](#)
- [T10 Torx Screwdriver \(1\)](#)
- [4 mm Hex Key \(1\)](#)
- [Phillips #2 Screwdriver \(1\)](#)
- [Probe and Pick Set \(1\)](#)

Step 1 — Taking Main cover off

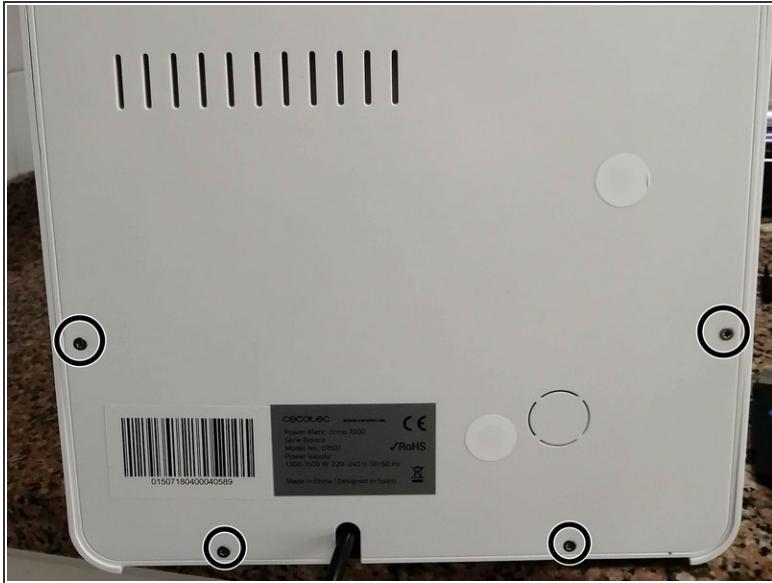

- Using T10 screw to unscrew the 8x screws in the back of the machine

Step 2



- Unscrew 1x PH2 Screw.
- Pull the Grinder Top cover with Dental pick or some curved tool
- Pull the grinder selector out.


Step 3



⚠ Pay attention! Unscrew this screw in CLOCKWISE Direction! Or else you will broken it.

- Unscrew in Clockwise Direction 1x 4mm Hex

Step 4

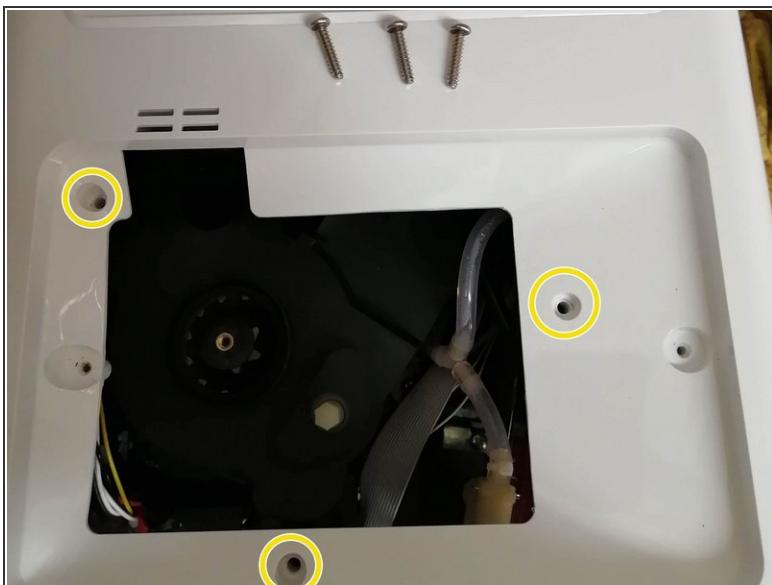

- Unscrew 3x Ph2 screws.

- ⓘ Slide Top Cover in back direction to take it off

Step 5



- After that steps you have almost access to every inner components of the coffee machine.

To reassemble your device, follow these instructions in reverse order.