



DeLonghi ESAM 3000.B Magnifica Open

Opening a DeLonghi Esam 3000.B (Magnifica) coffee machine

Written By: VauWeh



 **TOOLS:**

- Kreuzschlitzschraubendreher PH 2 (1)

Step 1 — DeLonghi ESAM 3000.B Magnifica Open



⚠ Pull the plug!

- Remove the drip tray, the water tank and the pulp container.

Step 2



- The back panel and side panels are attached with six phillips screws PH2. Screw it out.

Step 3



- Slide the right side panel about 2 cm to the back.
- Then solve it.

Step 4



- The left side is a bit stuck. Place a plastic opening tool in the gap between the front and left side panel above the opening for the water tank. Lift the gap slightly larger.
- Then place the tool in the gap between the front and left side panel under the opening for the water tank. Increase the gap and push the side part about 2 cm to the rear.
- Lift out the left side piece.

Step 5



- Take out the back


Step 6



- The front panel is secured with four PH2 Phillips screws, two left and one right each. Turn it out.
- Use a plastic opening tool to lever off the steam tap.
- Carefully pull the front panel about 1 cm forward so that there is a gap between the top cover and the front panel,

⚠ Do not pull the front panel too far, it is still attached with different hoses and cables.

Step 7

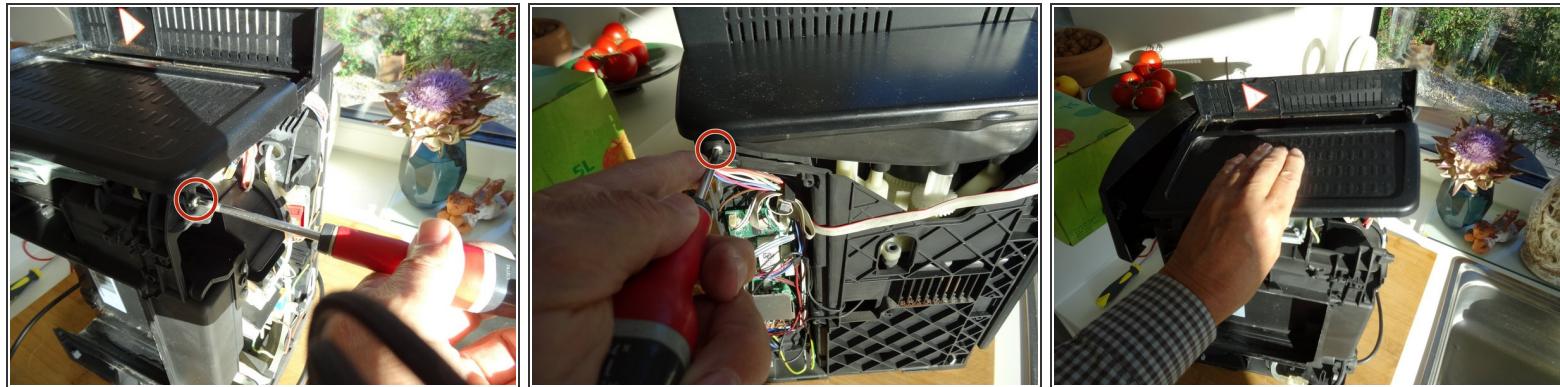

- Two Phillips screws PH2 hold the lid at the back. Turn it out.
- Lift the lid upwards.

Repeat the steps in order to reassemble your device.