



Dell Vostro 1400 Screen Replacement

Replacing the screen on Dell Vostro 1400.

Written By: David Hogg



INTRODUCTION

This guide will show you the proper steps to replace your screen on your Dell Vostro 1400



TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



⚠ Be sure the power is off and all cables are unplugged from the device before starting.


- After flipping over the laptop, the battery is on the bottom side of the laptop.
- Find the tabs on both the left and right side of the battery.

Step 2



- Push tabs toward the outside of the laptop until they lock in place.


Step 3

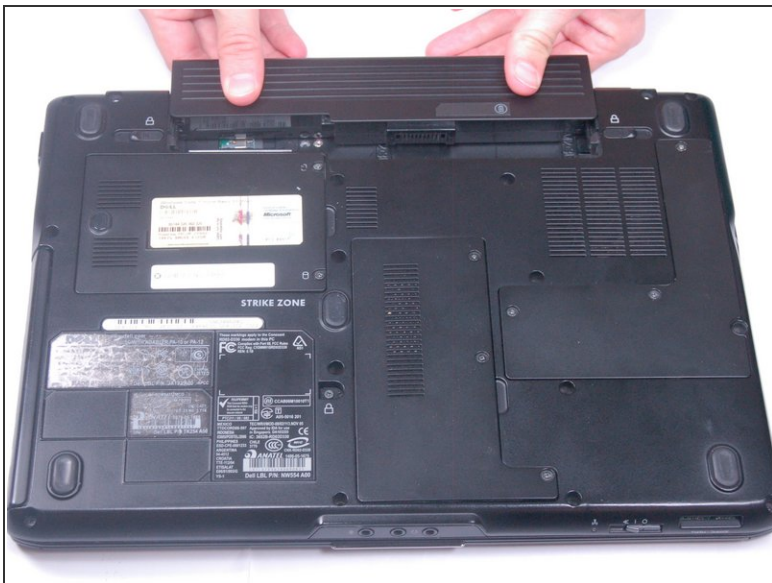

- Push the battery forward to eject it from the laptop.



Step 4 — Screen



 Please make sure your device is completely turned off and everything is unplugged from the device

- Open the laptop.

Step 5

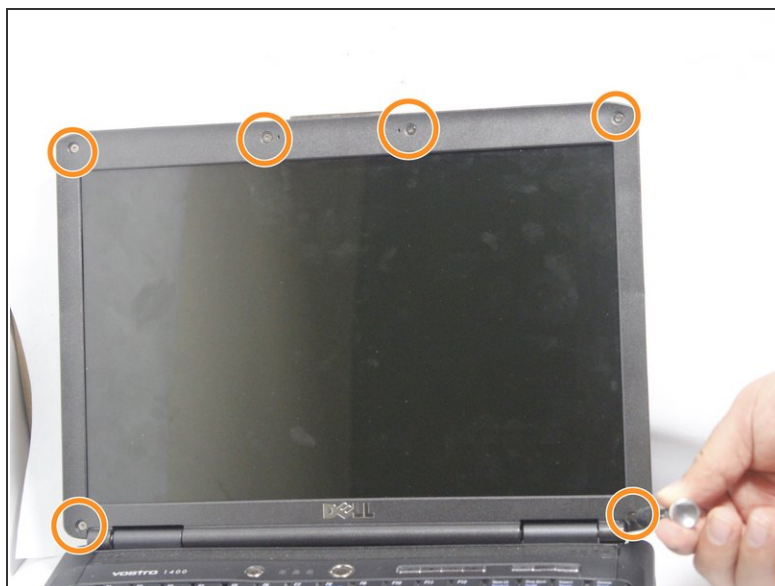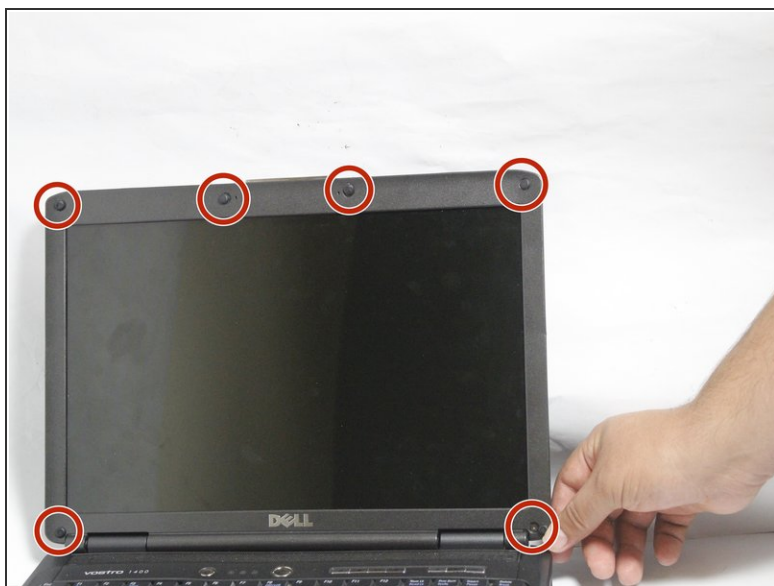


- Remove the 6 screw hole covers surrounding the screen.
- Remove the 6 screws that were underneath the screw covers.

Step 6



- Carefully remove the plastic surrounding the screen by pulling off, starting at the bottom.
- Remove the two (2.5mm x 5mm) screws at the top, by the camera.

Step 7

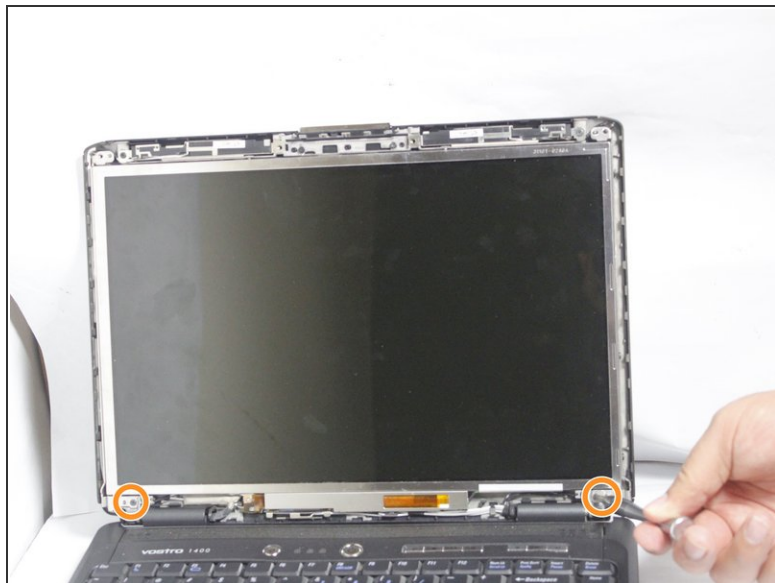

- Remove the two 5mm screws from the camera above the screen.
- Remove the two 5mm screws from the bottom of the screen.

Step 8



- Carefully remove the screen from the back cover.

Step 9





- Lift up the black tag holding the camera and cable together.
- Unplug the camera from the cable.

Step 10



- Unplug the two cables connected to the screen.

Step 11

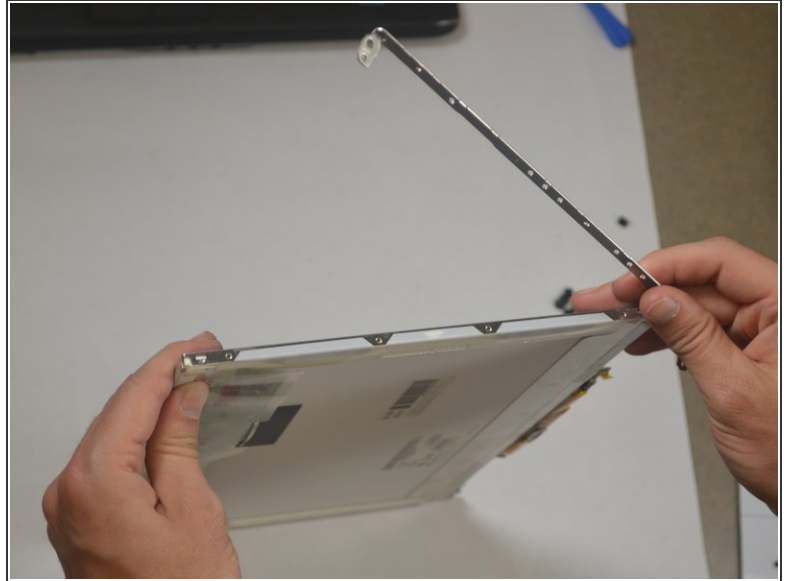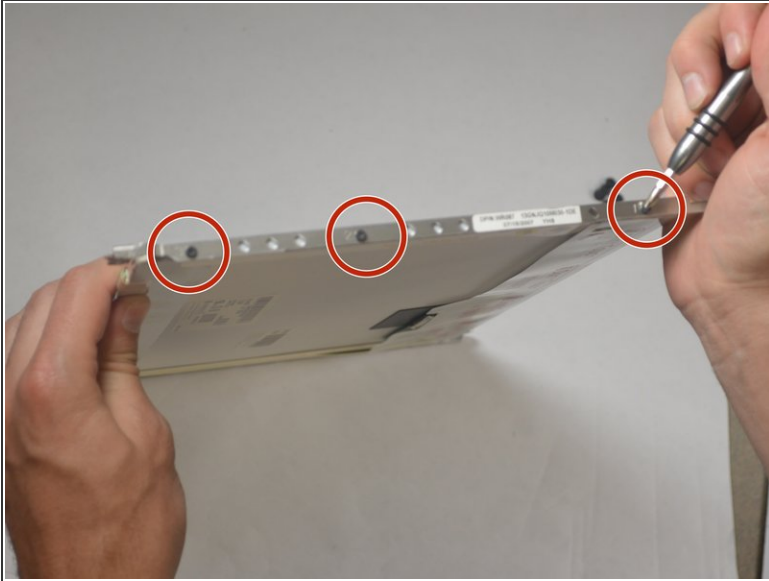

- Remove the six 3mm screws on each side of the screen.
- Remove the railing on each side of the screen.
- ⓘ The railing will be marked "L" for left side or "R" for the right. This should assist in reassembly.

To reassemble your device, follow these instructions in reverse order.