



Moto E5 Plus Battery Replacement

This guide will help you replace the battery in your Motorola E5 Plus or Supra.

Written By: Patrick





TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Suction Handle](#) (1)
- [Halberd Spudger](#) (1)
- [Heat Gun](#) (1)
- [Spudger](#) (1)
- [Tesa 61395 Tape](#) (1)



PARTS:

- [Moto E5 Plus Battery Adhesive Strips](#) (1)

Step 1 — Battery



! The back and frame of this phone is made of plastic. Be careful when heating the phone.

- Apply heat, then use a suction cup to lift the back enough to fit an opening pick underneath.
- Proceed to separate the adhesive around the edges of the phone, reapplying heat as needed.



Step 2



! The back of the phone is still attached via the fingerprint sensor's ribbon cable.

- Gently pull the back of the phone towards the charging port to reveal the shielding plate.
- Remove the screws and the metal plate.
- Disconnect the fingerprint sensor cable using a Halberd spudger or opening pick and remove the back of the phone.

Step 3

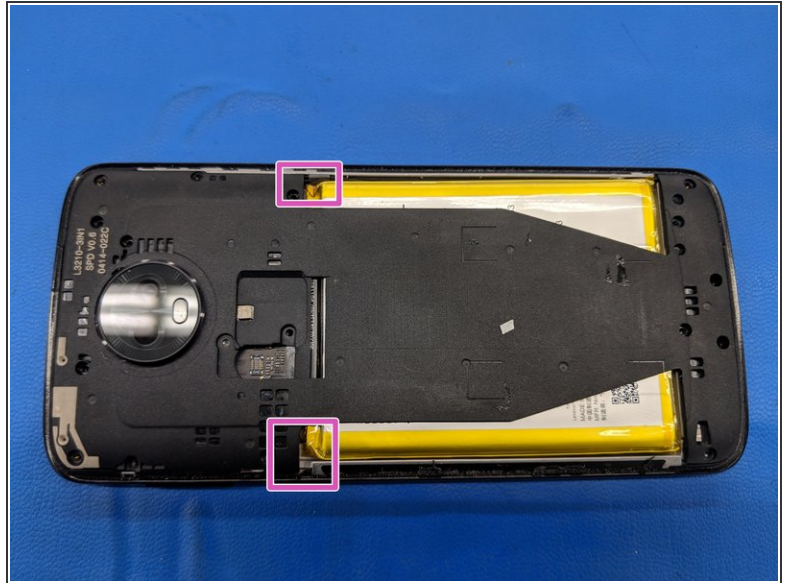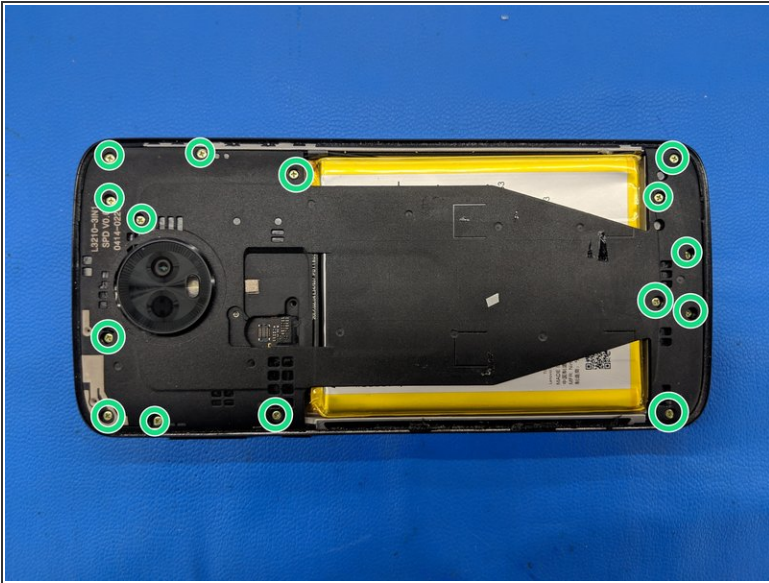

- Remove 15 #00 Philips screws.
- Insert the pointed end of a spudger underneath the plastic midframe on either side of the battery and pry upwards to disengage the clips.
- Remove the midframe.

Step 4



- Disconnect the battery.
- Remove the battery. The battery has adhesive on each side.

To reassemble your device, follow these instructions in reverse order.