



Samsung Admire Screen Replacement

Samsung Admire Screen Replacement

Written By: Thao Uyen Do



INTRODUCTION

If your phone's screen is cracked, this guide will help you step by step on how to replace the screen.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Back Cover



- To open the back cover of the phone, use your fingernail or plastic opening tool under the slit to pull the cover up.

Step 2 — Battery




- Place your fingernail or plastic tool into the hole beneath the camera and carefully lift out the battery.

Step 3 — Back Screws




- Use the Phillips #00 Precision Screwdriver to remove the six screws in the back of the phone.
- Keep track of the screws by using a small cup, box, or magnetic mat.

Step 4 — Inside Back Cover

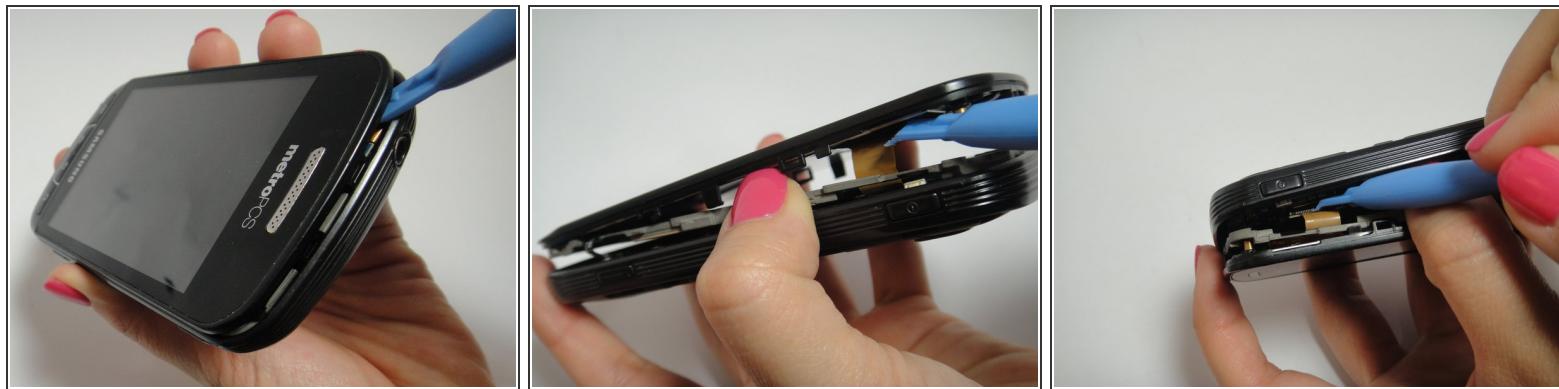


- Use the Plastic Opening tools to remove the inside back cover.
- Place the Plastic Opening tools on the outside rim of the inside back cover and carefully pry up on the screen.
- As you lift the cover, move around the phone and pry up all of the screen.
- Carefully disconnect the ribbon cables and slowly lift the inside back cover to remove it.

Step 5 — Motherboard

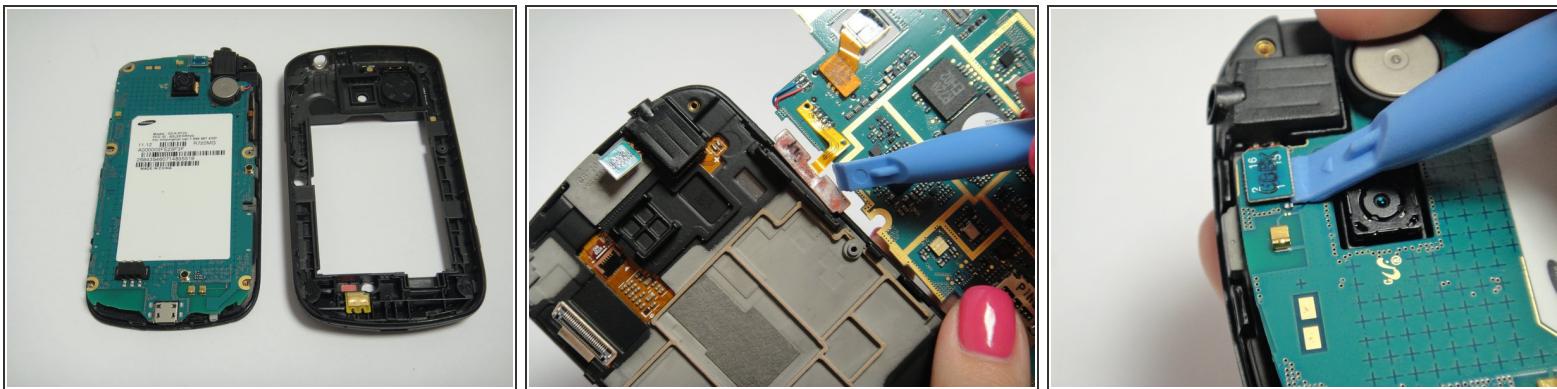

- Lift the motherboard slowly.
- Carefully disconnect the volume button away from the motherboard.
- Disconnect the two ribbon cables from the back of the motherboard.

Step 6 — Shield

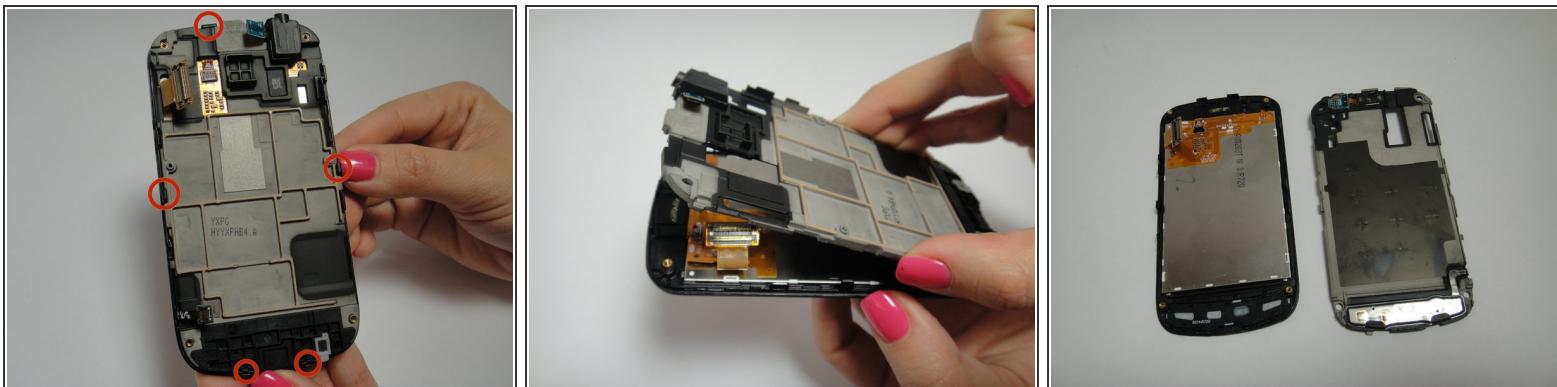

- Pull back on the five clips on the sides of the phone to remove the shield.
- Be careful not to break the ribbon cables.

Step 7 — LCD Screen



- Use the plastic opening tool to unlatch the ribbon cable to disconnect it.
- Put the plastic opening tool under the edge of the screen and lift the screen up carefully.

Step 8 — New Screen



- Insert new screen into the phone frame and reconnect the ribbon cable.
- Repeat step one to seven in reverse to reassemble the phone

To reassemble your device, follow these instructions in reverse order.